
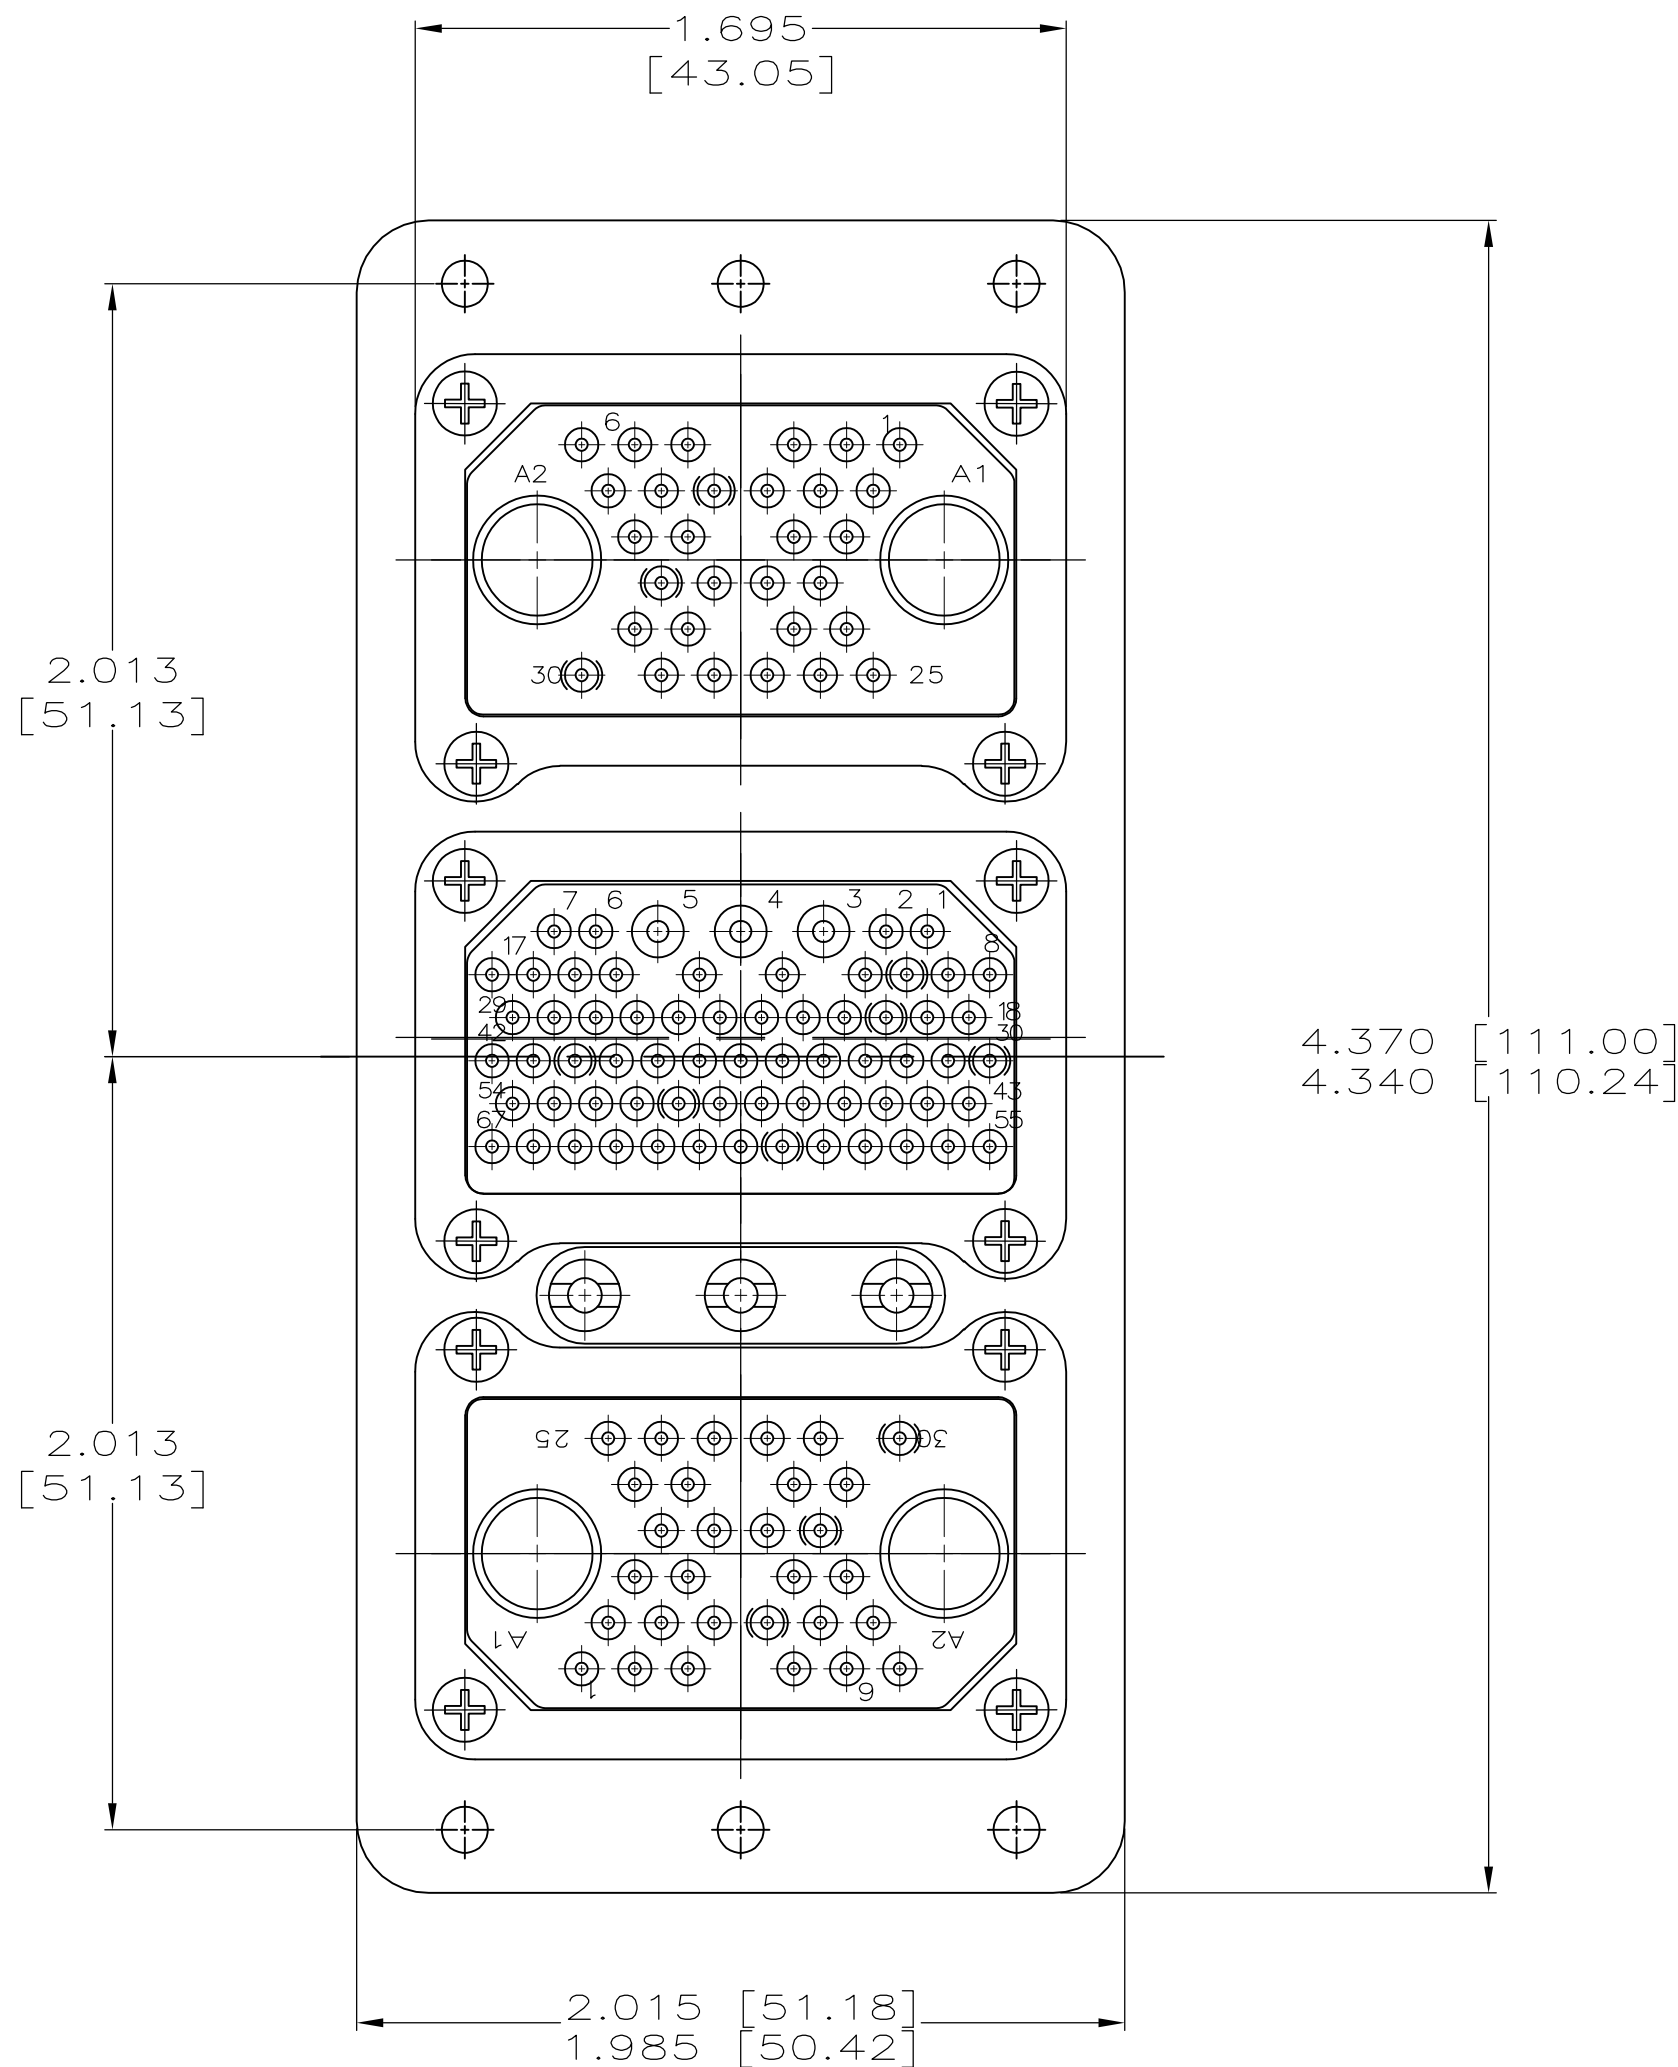
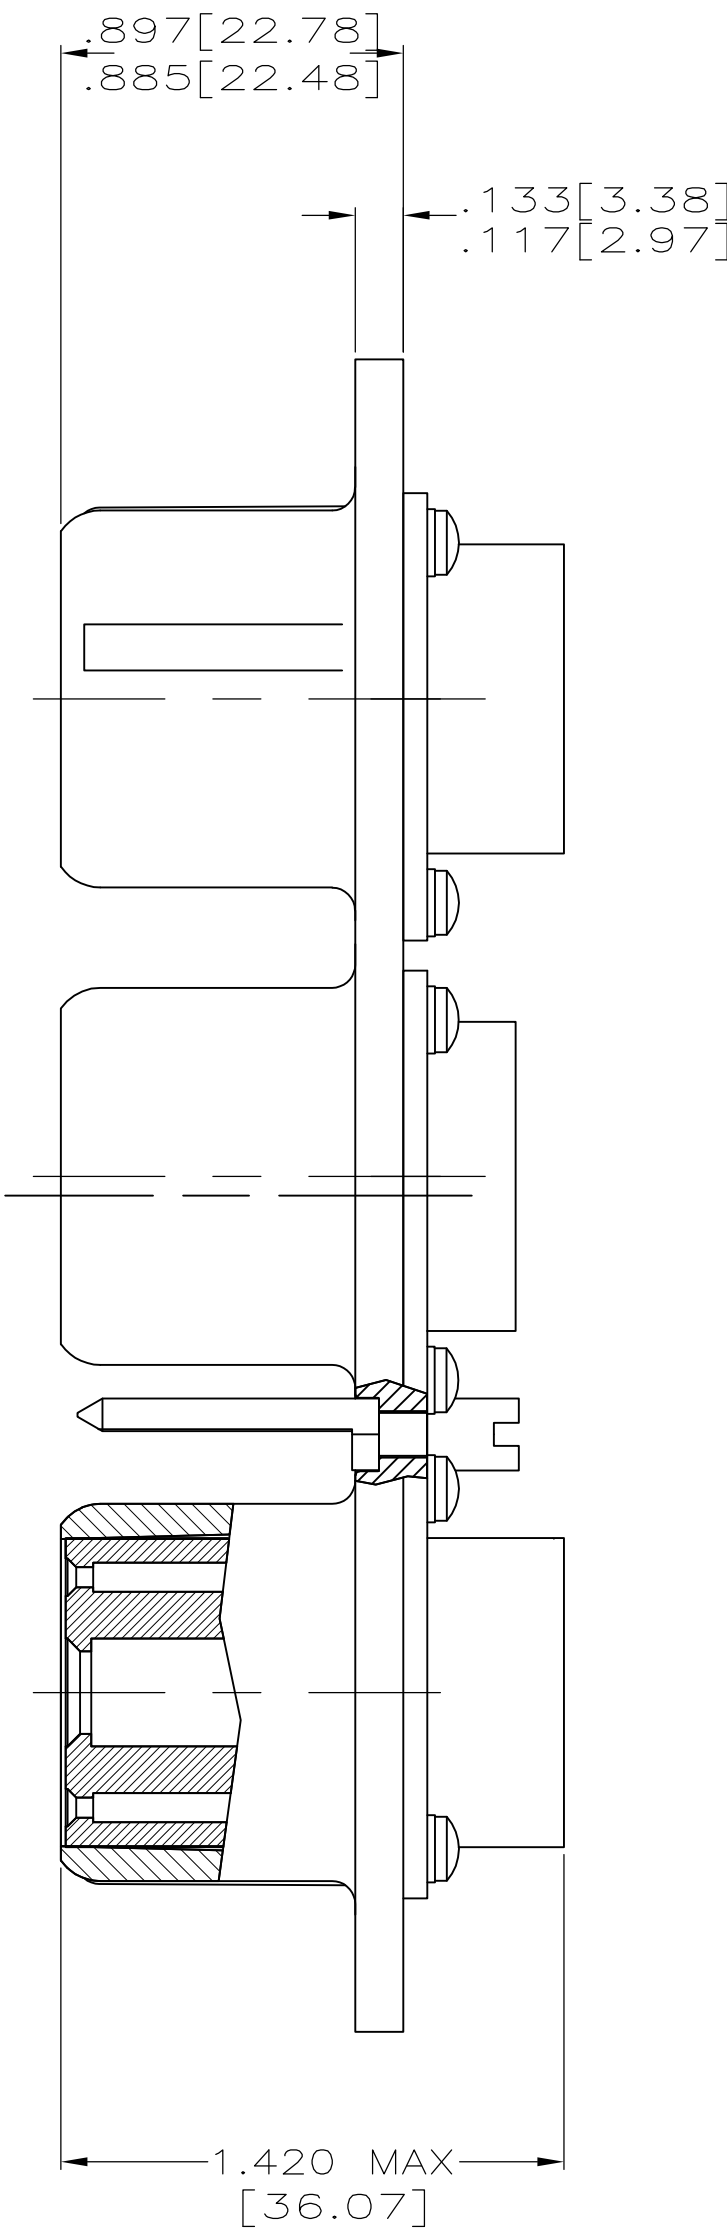


LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	DWN APVD
DF	AO	A	REV	PER ECO-12-021058	06DEC12	PY DE

1. MATERIAL AND FINISH:
SHELL: DIE CAST ALUMINUM ALLOY PER FED. SPEC QQ-A-591.
STANDARD FINISH: CADMIUM PLATE PER QQ-P-416, TYPE I,
CLASS 2 YELLOW CHROMATE CONVERSION.
INSERT RETENTION PLATE: ALUMINUM ALLOY, BLUE ANODIZE
PER MIL-A-8625.
SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATED.
POLARIZING POSTS: STAINLESS STEEL, PASSIVATED.
POLARIZING NUTS: BRASS, CADMIUM PLATED.

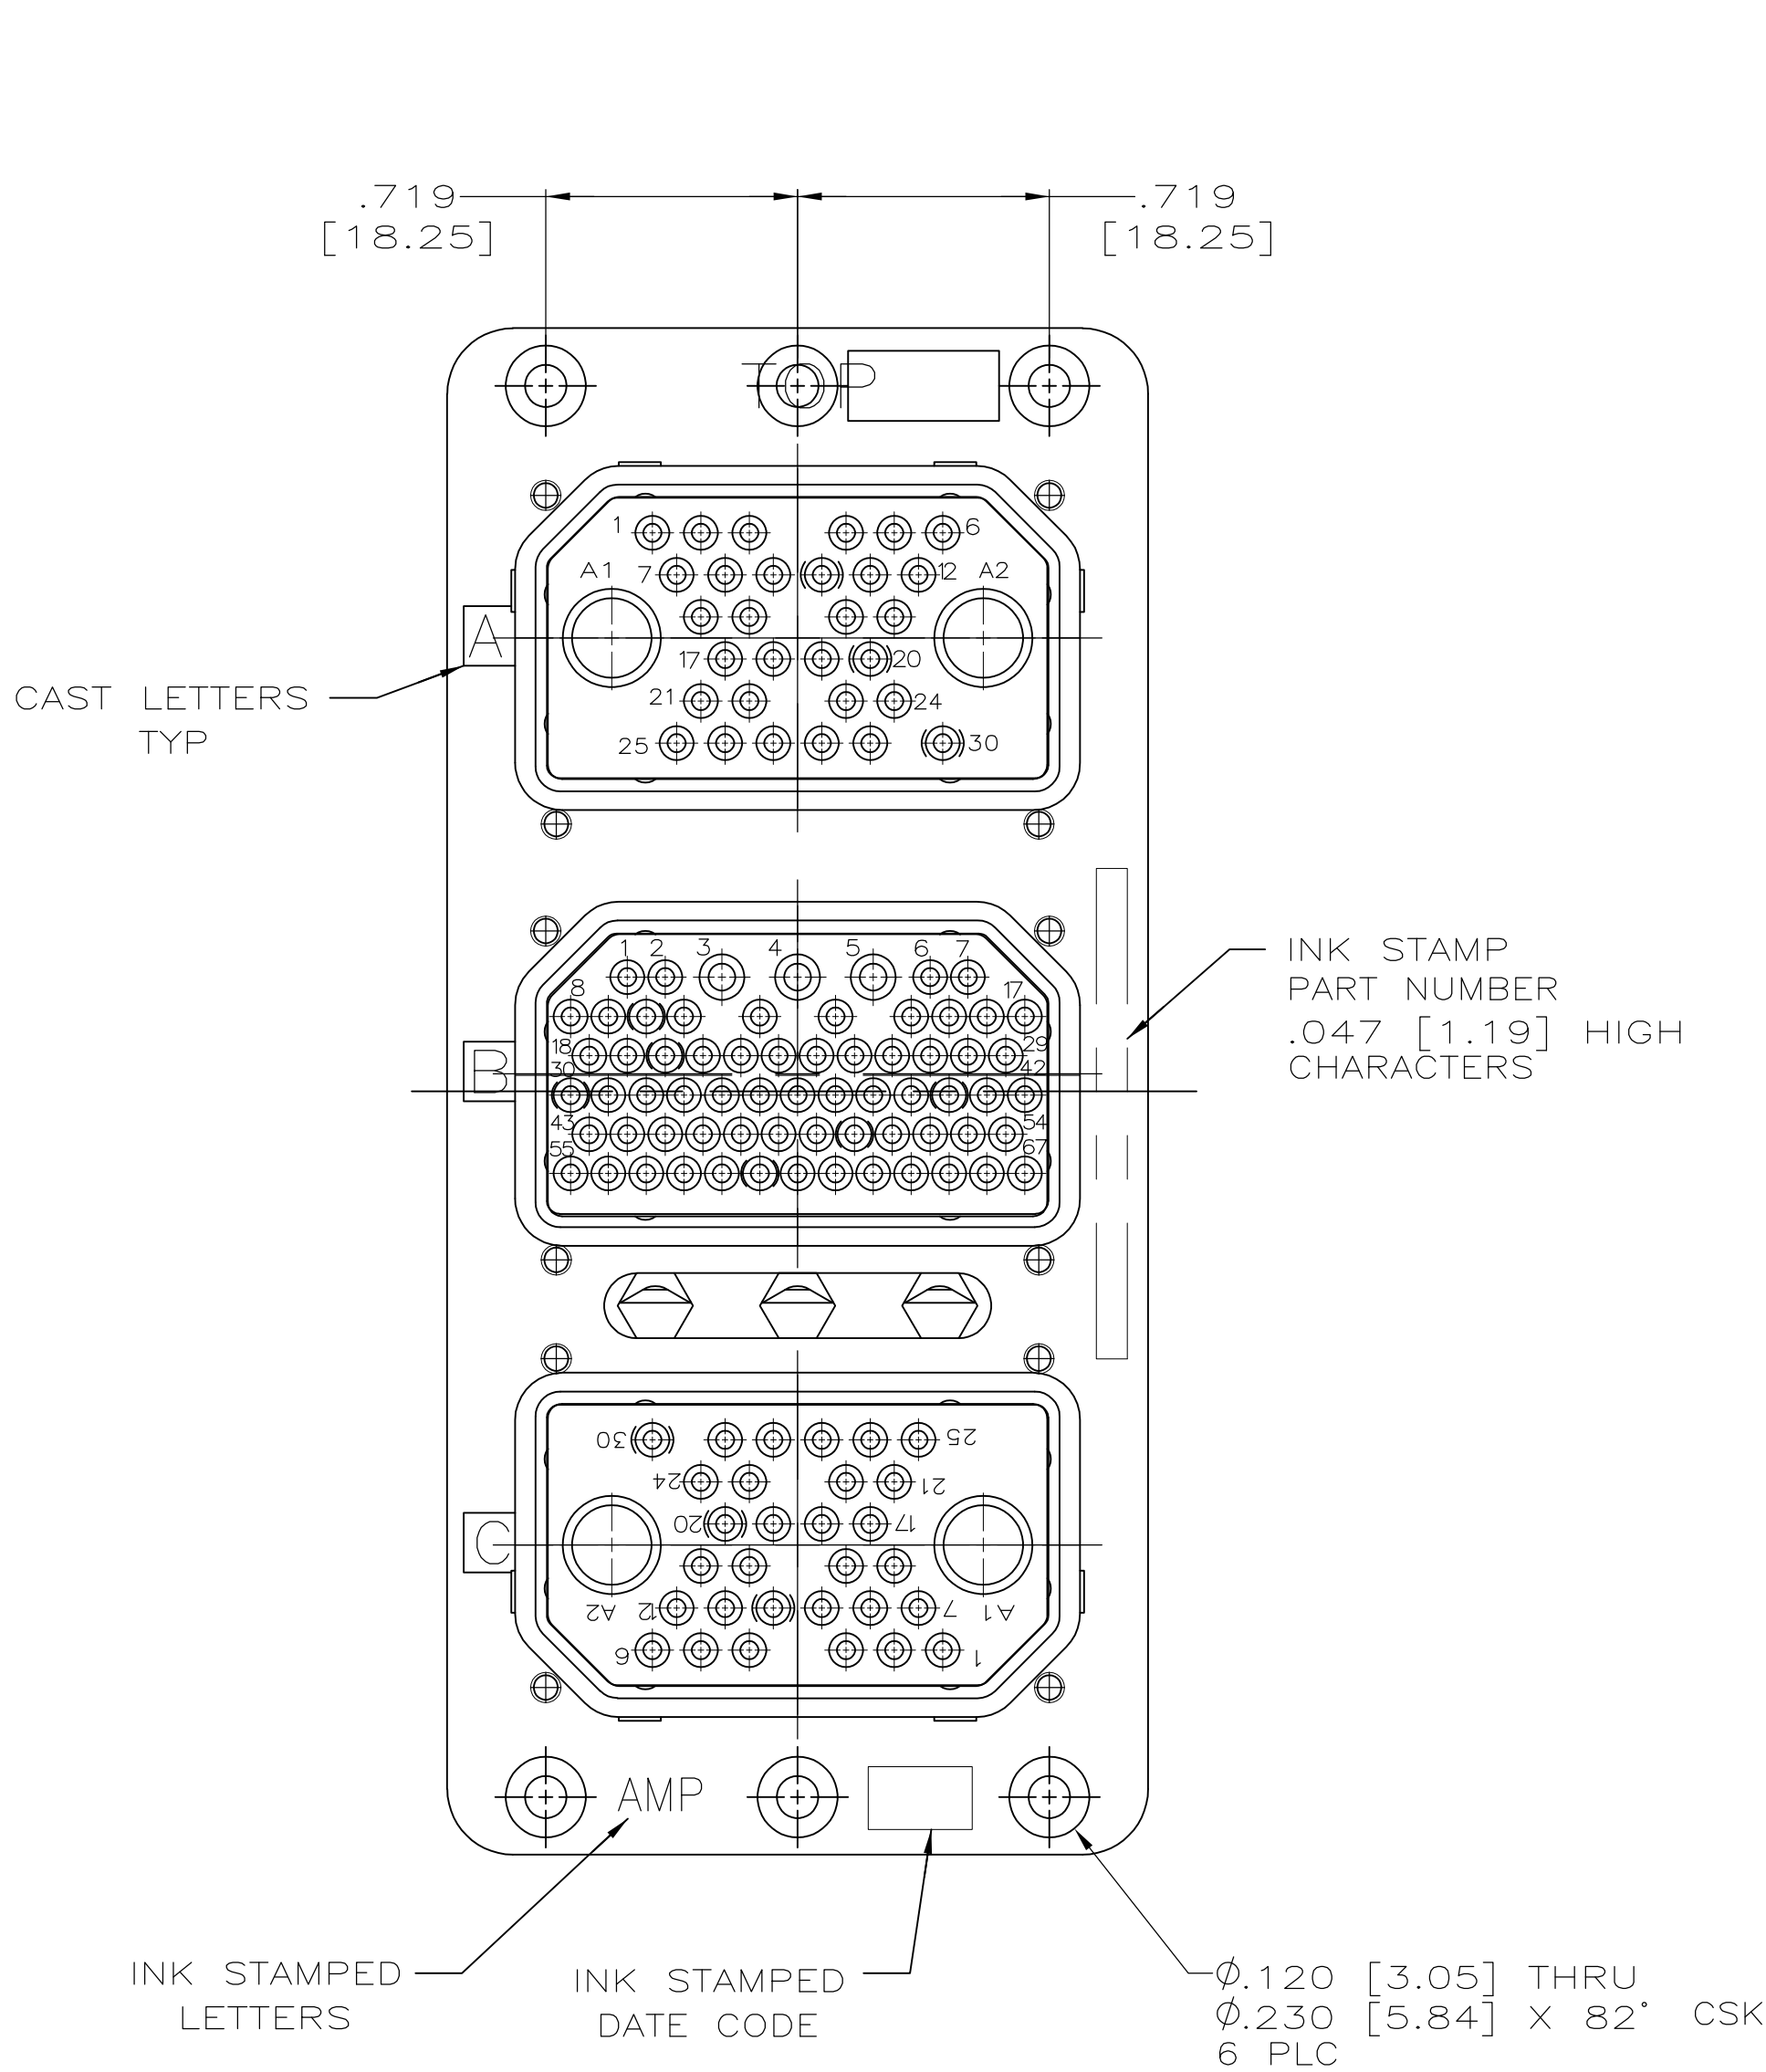

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. THOMPSON 08JUL98	TE Connectivity	
DIMENSIONS: INCHES		CHK R. GROSS 08JUL98		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .005 1 PLC ± .005 2 PLC ± .005 3 PLC ± .005 4 PLC ± .005 ANGLES ± .005		APVD R. GROSS 08JUL98	NAME RM3P32C2S67S32C2S-0001 (201) WITH COAX	
MATERIAL SEE CALLOUT		FINISH SEE CALLOUT	RESTRICTED TO —	
WEIGHT —		SIZE A1		00779
CUSTOMER DRAWING		SCALE 2:1		SHEET 1 OF 1