

Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Combination of pluggable type 2 arrester and residual current circuit breaker (RCD switch) for 3-phase power supply networks (5-conductor system: L1, L2, L3,N, PE).

Your advantages

- ✓ Combination of type 2 surge arrester and RCD residual current device
- ✓ Personal protection and device protection in a single device
- ✓ Residual current device is not triggered by magnetic influences caused by discharge currents in the type 2 arrester
- ✓ Optical, mechanical status indication for all protective plugs
- ✓ Disconnect device on each individual plug
- ✓ For 5-conductor systems; L1, L2, L3, N, PE
- ✓ Type 2 consistent plug-in surge arresters



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 310048
GTIN	4046356310048
Weight per Piece (excluding packing)	840.000 g
Custom tariff number	85363010
Country of origin	Germany

Technical data

Dimensions

Height	90 mm
Width	121 mm

Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Technical data

Dimensions

Depth	76 mm
Horizontal pitch	7 Div.

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 40 °C
Ambient temperature (storage/transport)	-40 °C ... 60 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %

General

IEC test classification	II
	T2
EN type	T2
IEC power supply system	TN-S
	TT
Mode of protection	L-N
	L-PE
	N-PE
Mounting type	DIN rail: 35 mm
Color	light gray
Housing material	PBT-FR
Degree of pollution	2
Flammability rating according to UL 94	V-0
Type	DIN rail module, two-section, divisible
Number of positions	4
Surge protection fault message	optical

Protective circuit

Nominal voltage U_N	240/415 V AC (TN-S)
	240/415 V AC (TT)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous operating voltage U_C (L-N)	350 V AC
Maximum continuous voltage U_C (N-PE)	264 V AC
Rated load current I_L	40 A
Residual current I_{PE}	≤ 1 μ A
Nominal discharge current I_n (8/20) μ s	20 kA
Maximum discharge current I_{max} (8/20) μ s	30 kA

Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Technical data

Protective circuit

Follow current interrupt rating I_{fi} (N-PE)	100 A (264 V AC)
Short-circuit current rating I_{SCCR}	10 kA
Voltage protection level U_p (L-N)	≤ 2 kV
Voltage protection level U_p (N-PE)	≤ 2 kV
Residual voltage U_{res} (L-N)	≤ 1.8 kV (at I_n)
	≤ 1.5 kV (at 10 kA)
	≤ 1.2 kV (at 5 kA)
	≤ 1 kV (at 3 kA)
Residual voltage U_{res} (L-PE)	≤ 2.5 kV (at I_n)
	≤ 2 kV (at 10 kA)
	≤ 1.4 kV (at 5 kA)
	≤ 1.1 kV (at 3 kA)
Residual voltage U_{res} (N-PE)	≤ 0.7 kV (at I_n)
	≤ 0.4 kV (at 10 kA)
	≤ 0.3 kV (at 5 kA)
	≤ 0.2 kV (at 3 kA)
TOV behavior at U_T (L-N)	415 V AC (5 s / withstand mode)
	457 V AC (120 min / safe failure mode)
TOV behavior at U_T (N-PE)	1200 V AC (200 ms / withstand mode)
Response time t_A (L-N)	≤ 25 ns
Response time t_A (N-PE)	≤ 100 ns
Max. backup fuse with branch wiring	63 A (MCB)

Connection data

Connection name	Connection protective circuit
Connection method	Screw connection
Tightening torque	3.5 Nm
Stripping length	15 mm
Conductor cross section flexible	4 mm ² ... 25 mm ²
Conductor cross section solid	4 mm ² ... 25 mm ²
Conductor cross section AWG	12 ... 4
Connection name	Protective ground connection
Connection method	Screw connection
Screw thread	M5
Tightening torque	4.5 Nm
Stripping length	16 mm
Conductor cross section flexible	2.5 mm ² ... 16 mm ²

Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Technical data

Connection data

Conductor cross section solid	2.5 mm ² ... 25 mm ²
Conductor cross section AWG	12 ... 4

RCD switch

Rated residual operating current $I_{\Delta n}$	30 mA
Rated making and breaking capacity I_m	1.5 kA
Rated residual making and breaking capacity $I_{\Delta m}$	2.5 kA
Rated impulse withstand voltage U_{imp}	6 kV (1.2/50 μ s)
Rated conditional short-circuit current I_{nc}	10 kA
Tripping time for $I_{\Delta n}$	\leq 300 ms
Tripping time for $5xI_{\Delta n}$	\leq 40 ms
Switching cycles, max.	20000
Utilization category	AC 23 A
Insulation voltage U_i	440 V


Standards and Regulations

Standards/regulations	IEC 61643-11 2011
	EN 61643-11 2012
	EN 61008-1
	IEC 60947-1
	IEC 60947-3

Drawings

Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802


Functional drawing

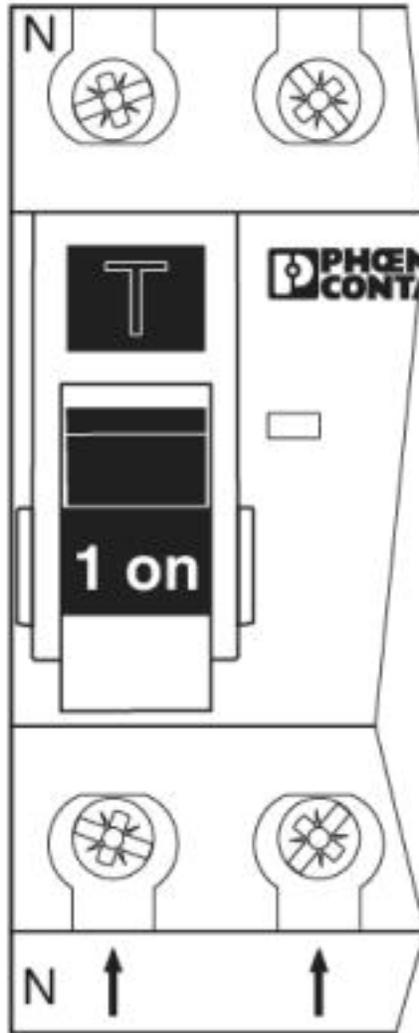


=> ok

Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Functional drawing

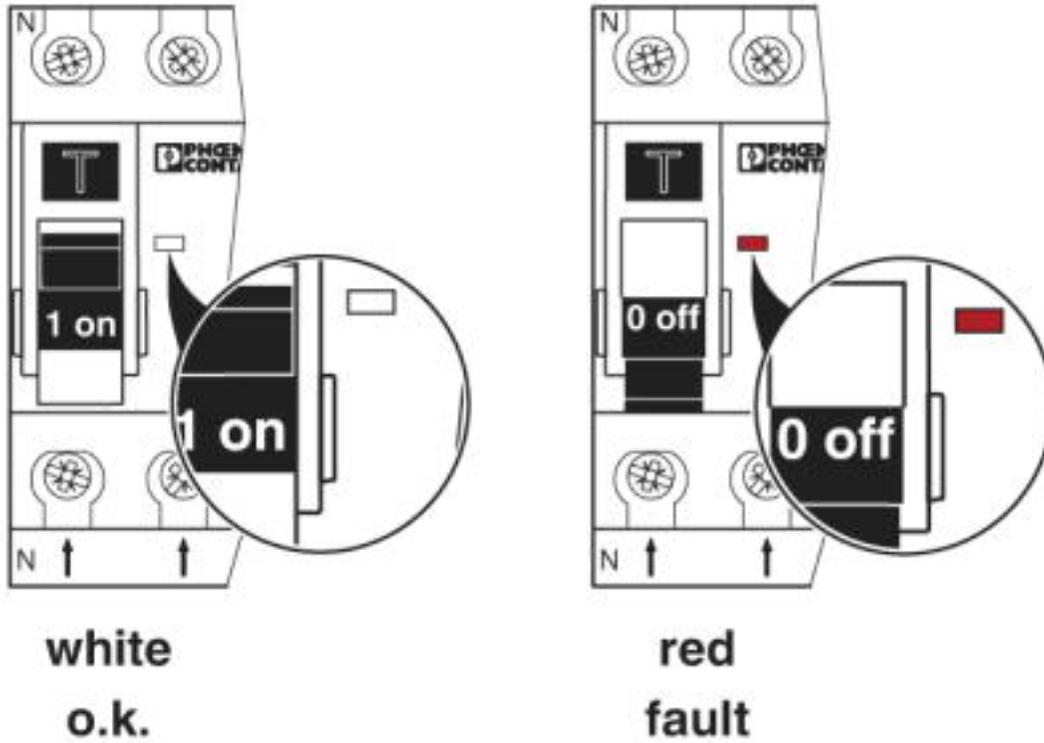


Functional drawing

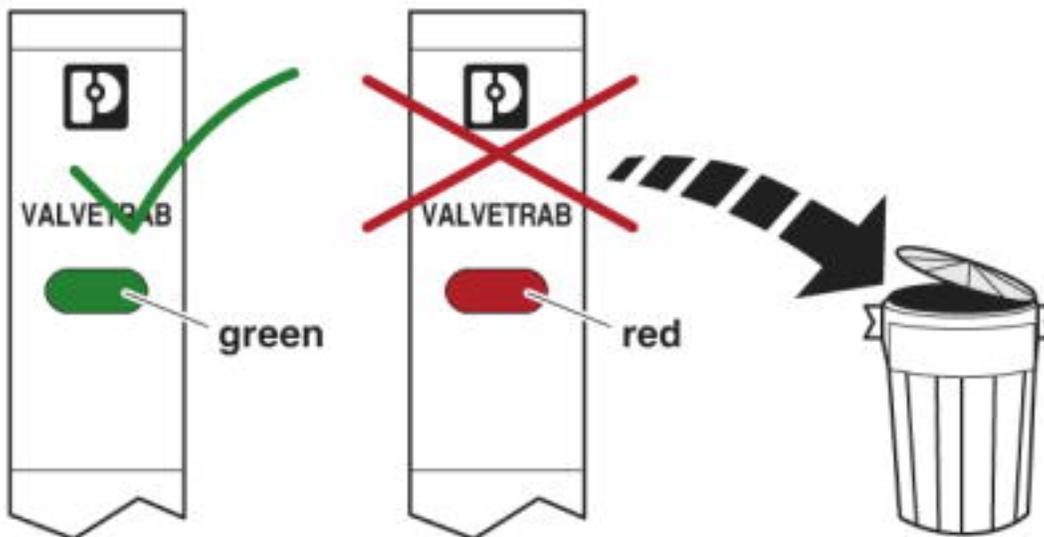


Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Functional drawing

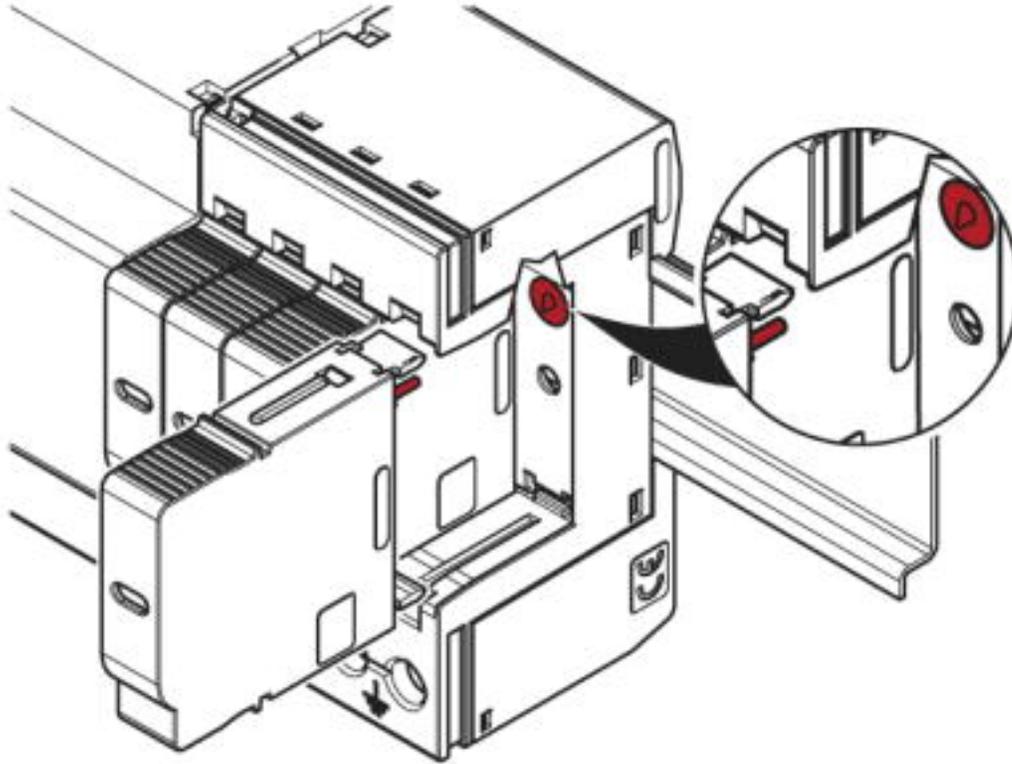


Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Functional drawing

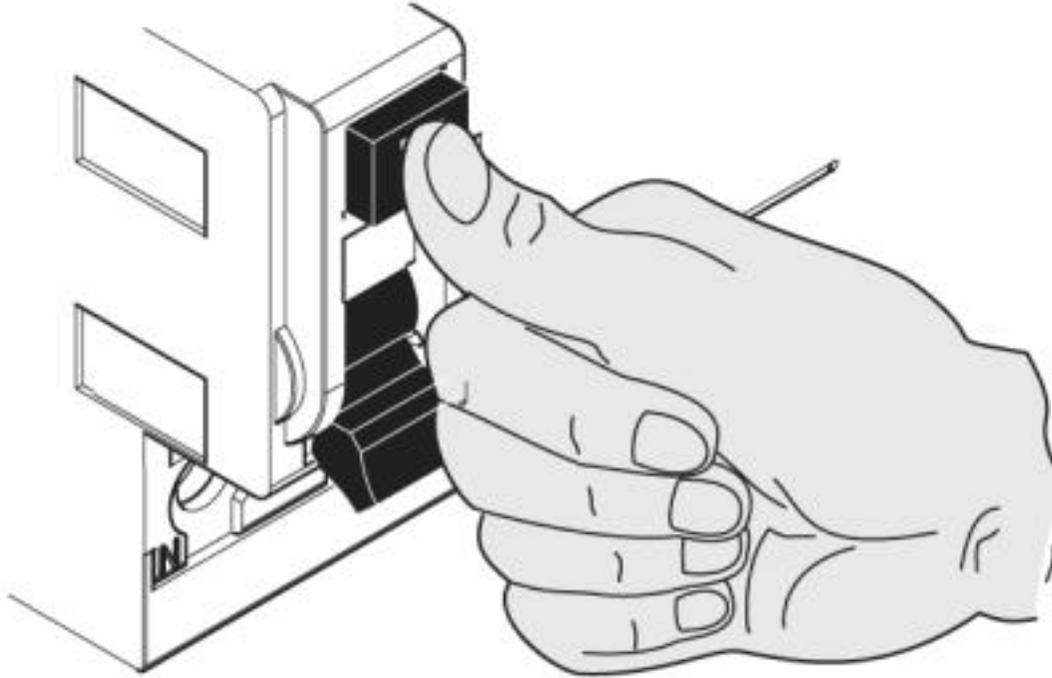


Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Dimensional drawing

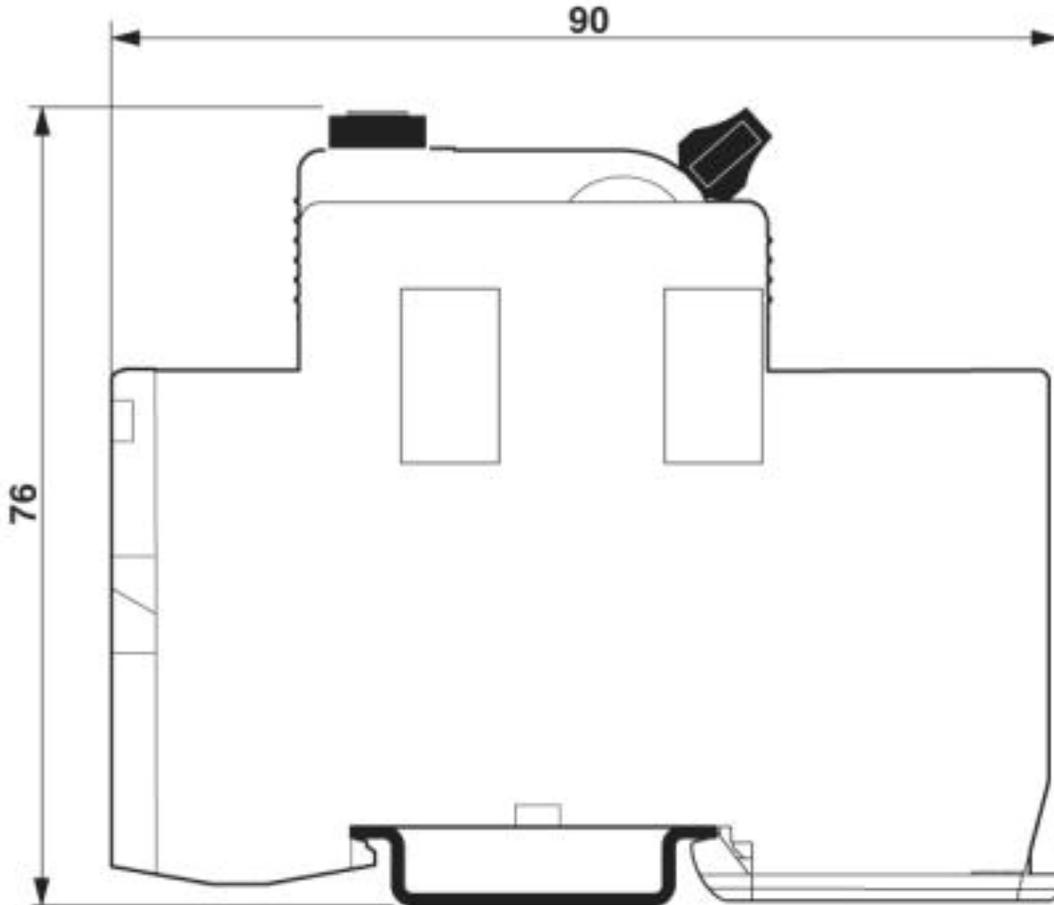


Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Product drawing

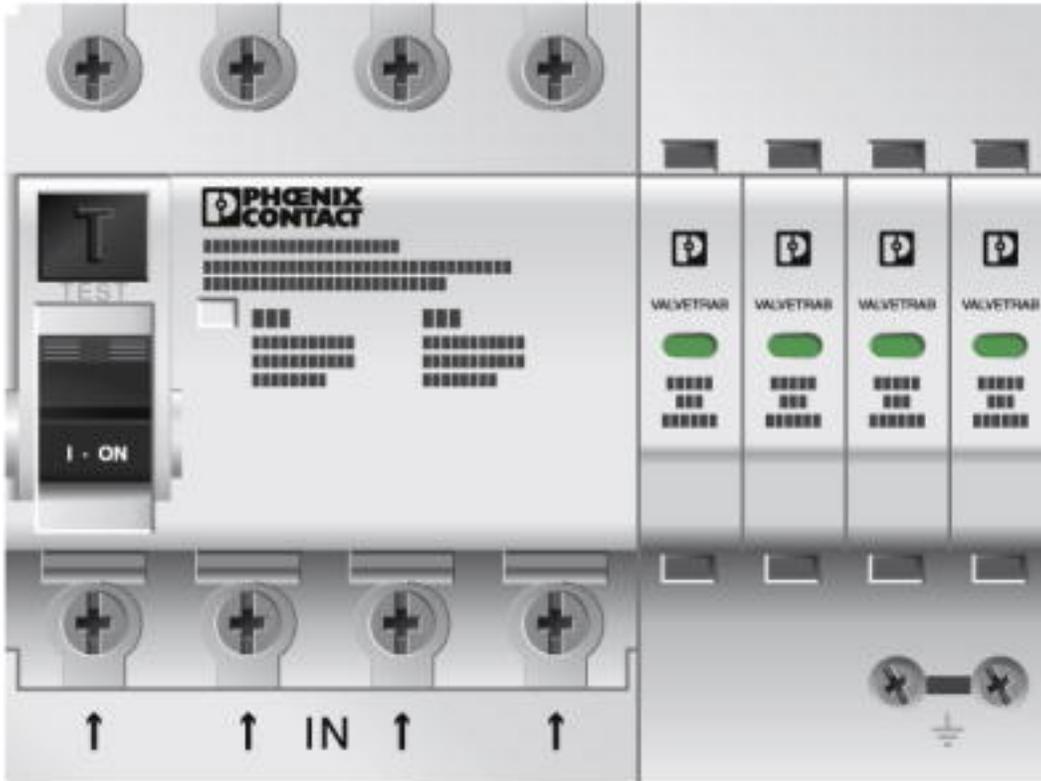

Circuit diagram

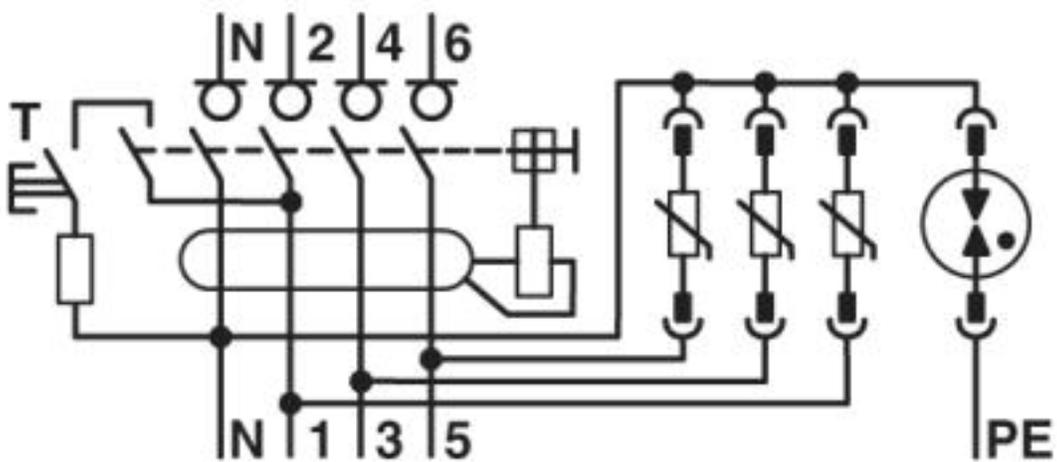

Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130800
eCl@ss 6.0	27130800
eCl@ss 7.0	27130805
eCl@ss 8.0	27130805
eCl@ss 9.0	27130805

ETIM

ETIM 2.0	EC000941
ETIM 3.0	EC000941
ETIM 4.0	EC000941
ETIM 5.0	EC000941
ETIM 6.0	EC000941

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620
UNSPSC 19.0	39121620

Accessories

Accessories

Bridge

Wiring bridge - MPB SET VAL-CP-3S - 2880684



Wiring bridge set, consisting of three flexible bridges 15 cm black, 1 bridge 27 cm blue.

Spare parts

Type 2 surge arrester - VAL-CP-RCD-3S/40/0.03 - 2882802

Accessories

Type 2 surge protection plug - VAL-CP-350-ST-GY - 2882718



Replacement plug for VAL-CP surge protective device with high-capacity varistor with a low leakage current.

Type 2 surge protection plug - VAL-CP-N/PE-350-ST-GY - 2882734



Replacement plug for VAL-CP surge arrester with N-PE spark gap.
