



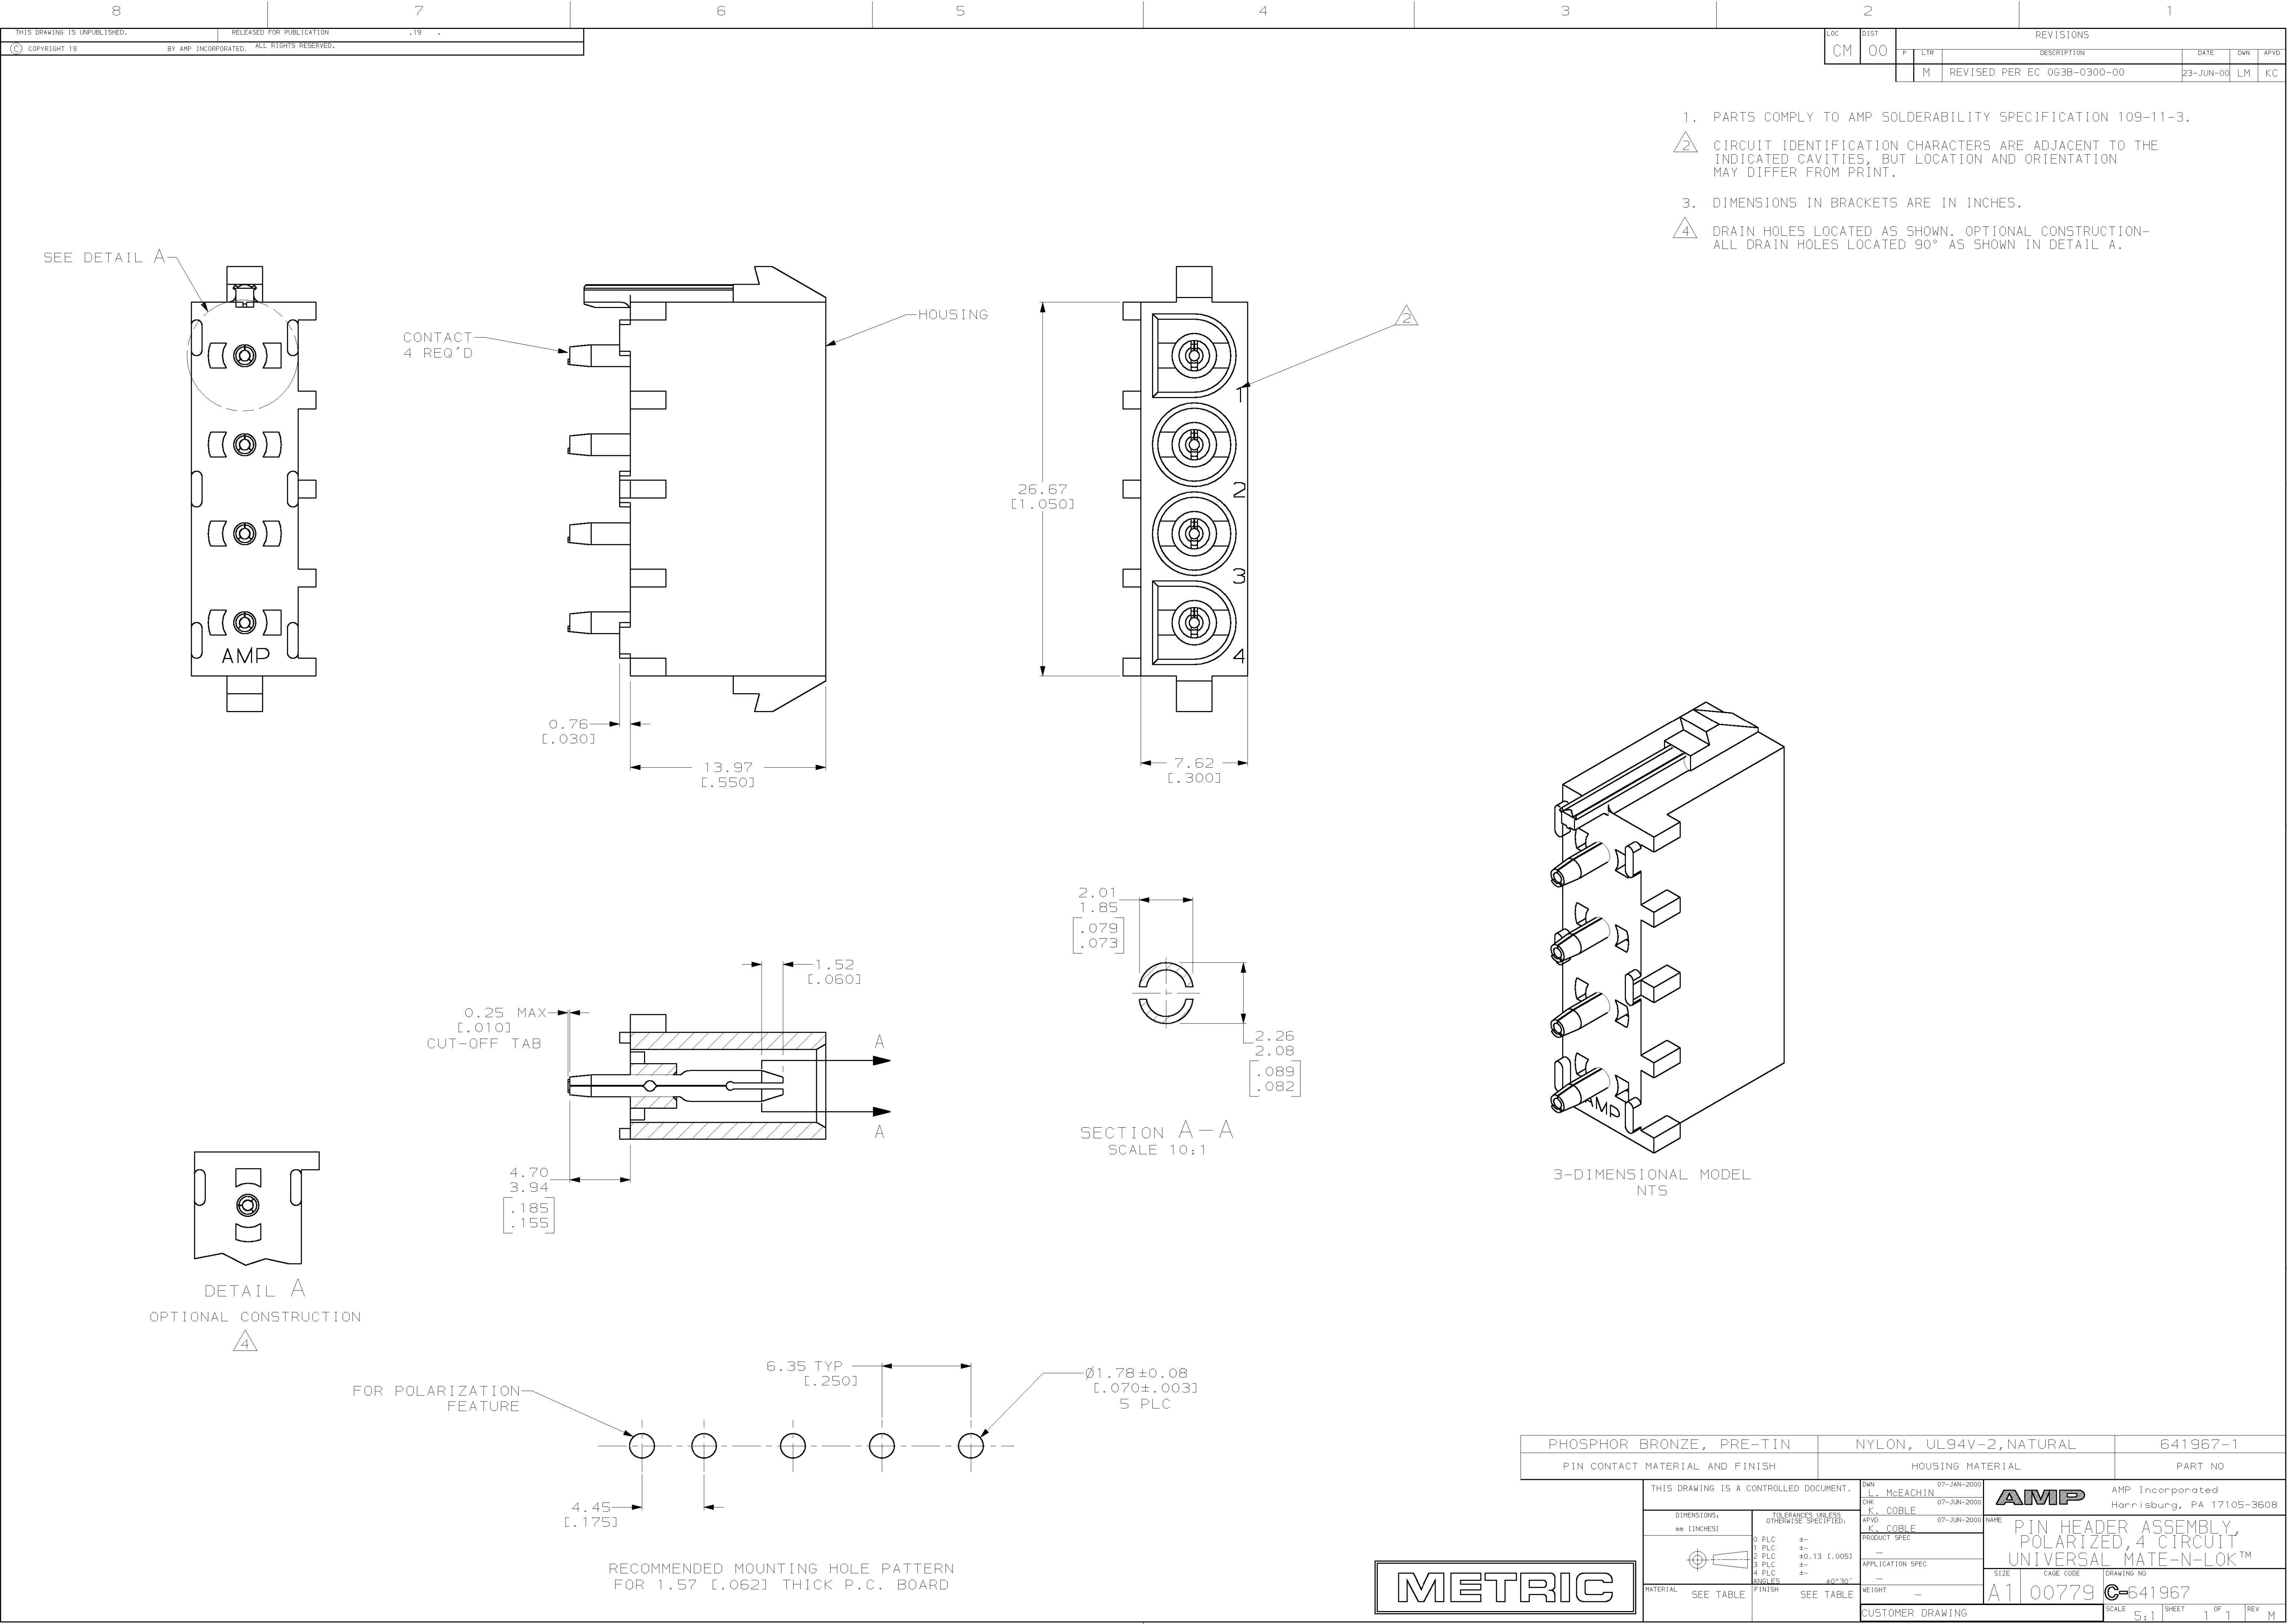

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
4. DRAIN HOLES LOCATED AS SHOWN. OPTIONAL CONSTRUCTION- ALL DRAIN HOLES LOCATED 90° AS SHOWN IN DETAIL A.

PHOSPHOR BRONZE, PRE-TIN			NYLON, UL94V-2, NATURAL			641967-1		
PIN CONTACT MATERIAL AND FINISH			HOUSING MATERIAL			PART NO		
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN L. McEACHIN 07-JAN-2000		AMP AMP Incorporated Harrisburg, PA 17105-3608			
			CHK K. COBLE 07-JUN-2000					
DIMENSIONS: mm (INCHES)		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 07-JUN-2000		NAME		
		0 PLC ±.005 1 PLC ±.005 2 PLC ±.013 (.005) 3 PLC ±.013 (.005) 4 PLC ±.013 (.005) ANGLES 40°-90°		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		PIN HEADER ASSEMBLY, POLARIZED, 4 CIRCUIT UNIVERSAL MATE-N-LOK™		
MATERIAL SEE TABLE		FINISH SEE TABLE		SIZE A1 00779		CAGE CODE C-641967		
				CUSTOMER DRAWING		DRAWING NO		
						SCALE 5:1 SHEET 1 OF 1 REV M		

