

SPECIFICATIONS:

CONTACT RATING: Refer to "Contact Material Options" for more info.

ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.

CONTACT RESISTANCE: 10mΩ max. initial @2-4VDC

100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000M Ω Min.

DIELECTRIC STRENGTH: 1,500 V RMS @sea level.

OPERATING TEMPERATURE: -30°C ~ 85°C.

MATERIALS:

CASE & BUSHING: Nylon 9T, flame retardant, heat stabilized (UL94V-0).

ACTUATOR: Brass chrome plated, internal o-ring sealed (100A).


ACTUATOR: Brass chrome plated (100C).

SWITCH SUPPORT: Brass, tin plated.

TERMINAL SEAL: Epoxy.

If your preferred product configuration is not shown, please contact our sales representative for custom design.

HOW TO ORDER SYSTEM

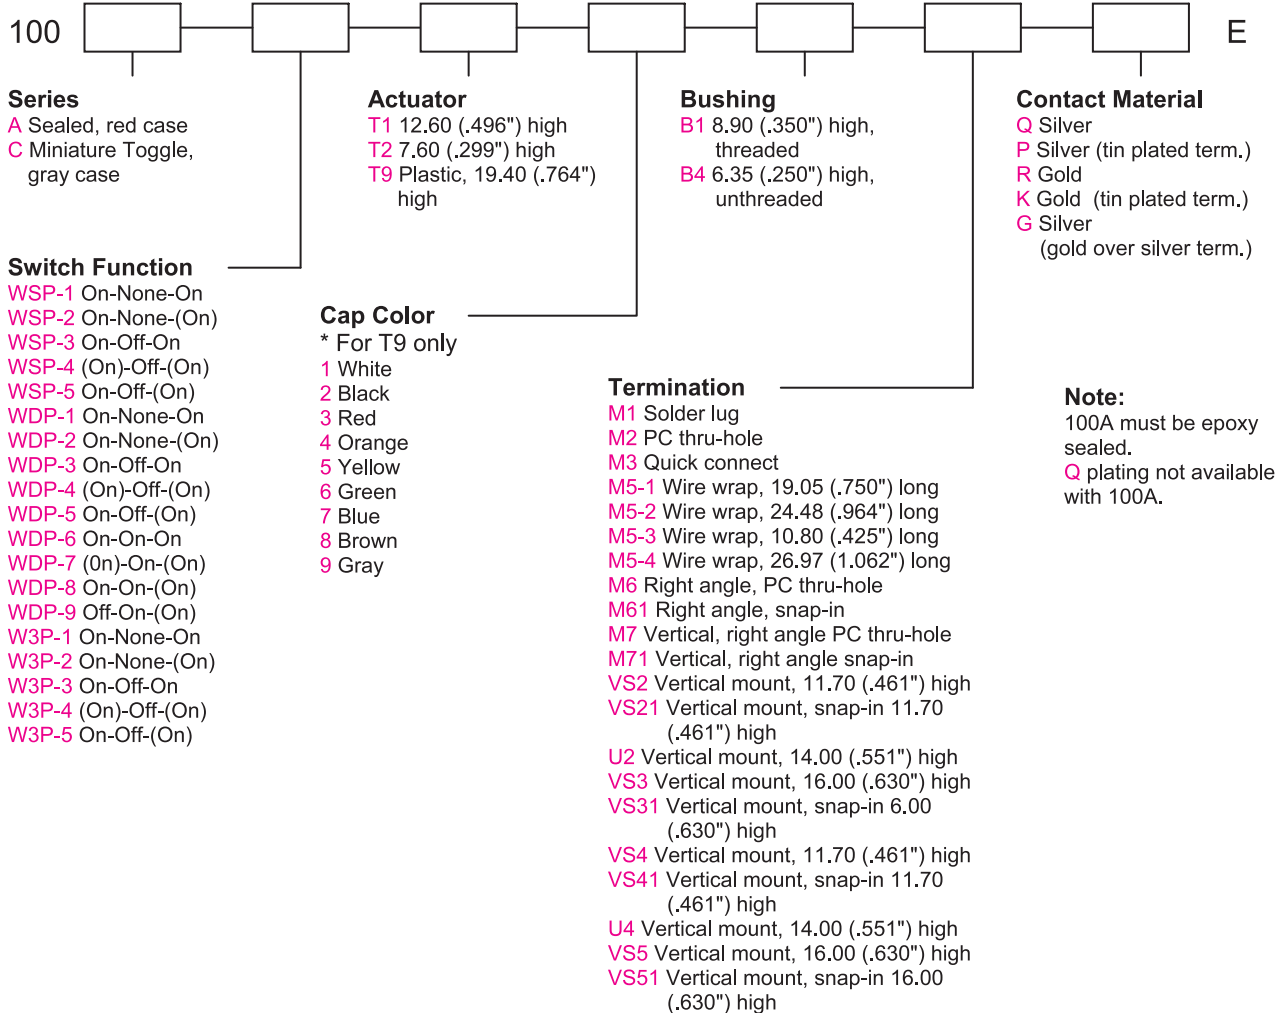


SPDT



Model No.	Switching Position		
WSP-1	ON	NONE	ON
WSP-2	ON	NONE	(ON)
WSP-3	ON	OFF	ON
WSP-4	(ON)	OFF	(ON)
WSP-5	ON	OFF	(ON)
Term. Comm.	2-3	OPEN	2-1

Schematic

O2Comm.

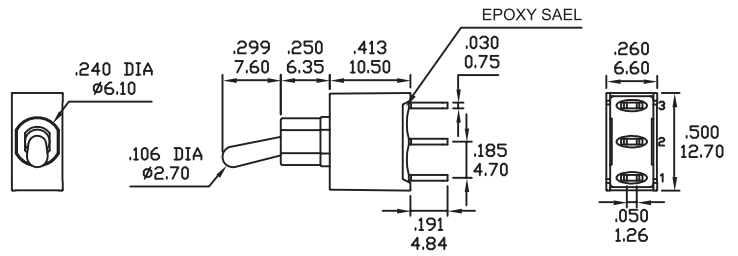


DPDT




Model No.	Switching Position		
WDP-1	ON	NONE	ON
WDP-2	ON	NONE	(ON)
WDP-3	ON	OFF	ON
WDP-4	(ON)	OFF	(ON)
WDP-5	ON	OFF	(ON)
Term. Comm.	2-3,5-6	OPEN	2-1,5-4

Schematic

O2Comm. O5Comm.

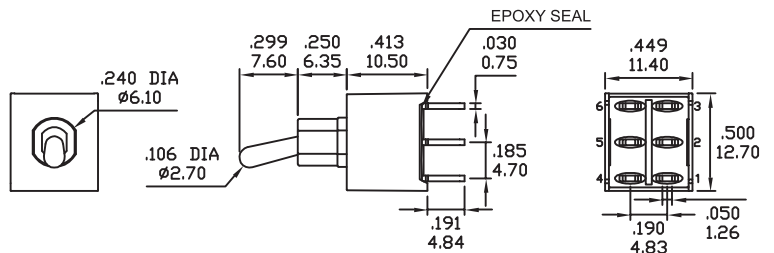

WIRING FOR ON-ON-ON (3-WAY) FUNCTION

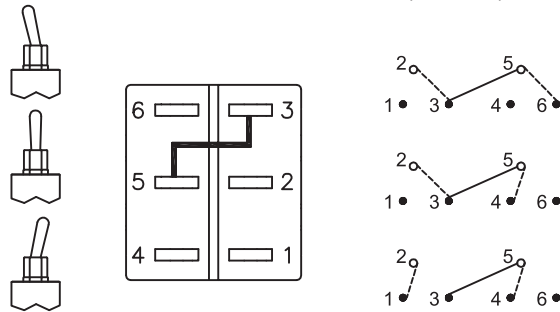


3PDT



Model No.	Switching Position		
W3P-1	ON	NONE	ON
W3P-2	ON	NONE	(ON)
W3P-3	ON	OFF	ON
W3P-4	(ON)	OFF	(ON)
W3P-5	ON	OFF	(ON)
Term. Comm.	2-3,5-6 8-9	OPEN	2-1,5-4 8-7


Schematic

O2Comm. O5Comm. O8Comm.

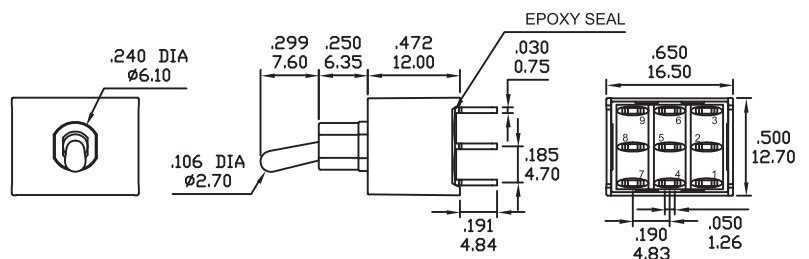


ACTUATOR OPTIONS

T1





* Subtract 2.00 from actuator height for B1 bushing

T2



* Subtract 2.10 from actuator height for B1 bushing


T9 PLASTIC




NO.	COLOR
1	White
2	Black(std.)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

BUSHING OPTIONS

B1




B4




TERMINATION OPTIONS

M1 STD. SOLDER LUG




THK .030 (0.75)

M2 PC THRU-HOLE




THK .030 (0.75)

M3 QUICK CONNECT



THK .030 (0.75)

M5 WIRE WRAP



THK .030 (0.75)


OPTION CODE	DIM.'A'
M5-1	.750(19.05)
M5-2	.964(24.48)
M5-3	.425(10.80)
M5-4	1.062(26.97)

TERMINATION OPTIONS


M6



SPDT

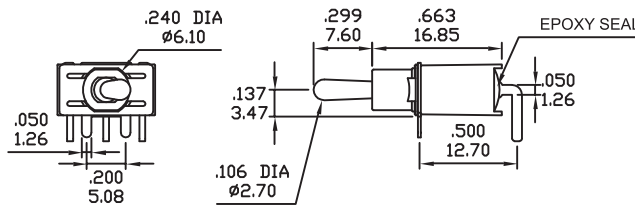


P.C.MOUNTING




M6



DPDT

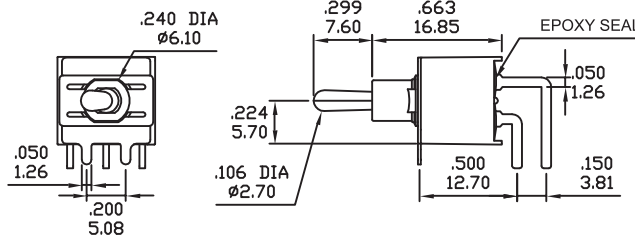


P.C.MOUNTING




M6



3PDT

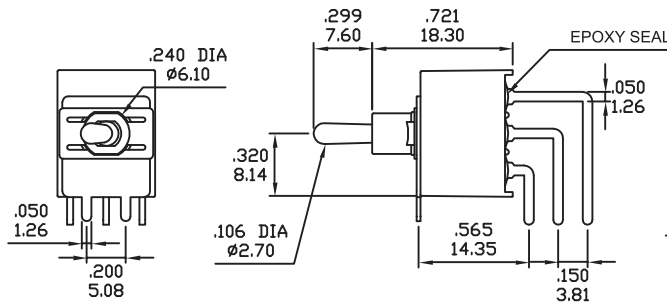


P.C.MOUNTING




M7



SPDT

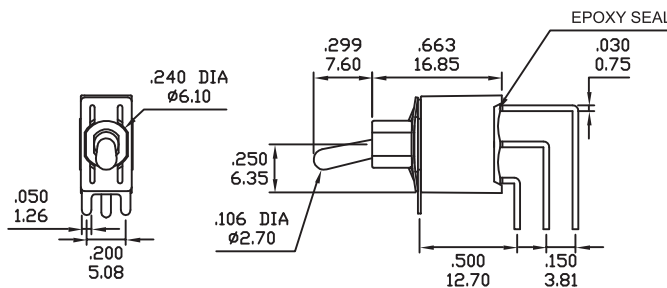


P.C.MOUNTING




M7



DPDT

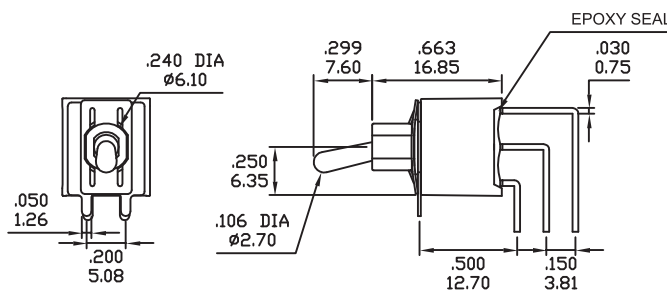

P.C.MOUNTING




TERMINATION OPTIONS

M7



3PDT

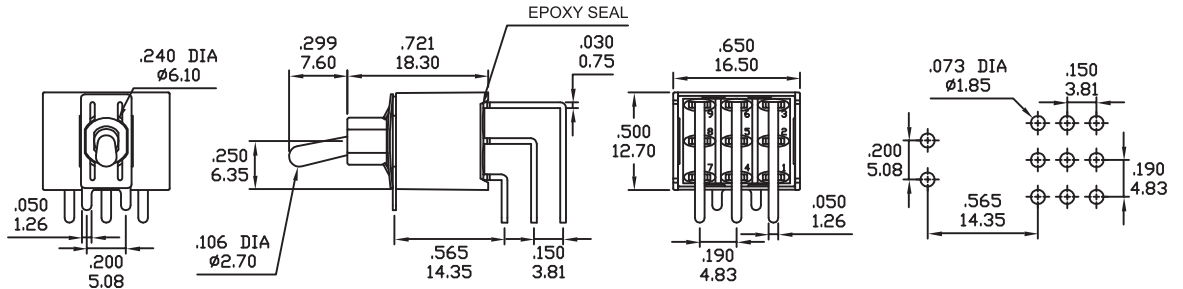


P.C.MOUNTING

VS2-VS3




SPDT

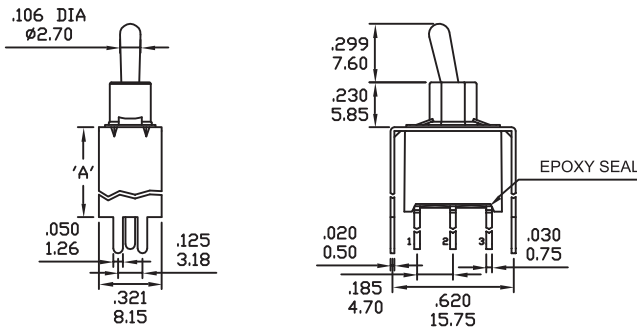

P.C.MOUNTING


OPTION CODE	DIM. 'A'
VS2	.461 11.70
VS3	.630 16.00



VS2-VS3




DPDT

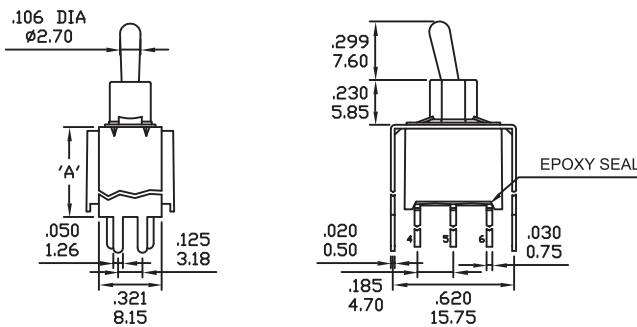

P.C.MOUNTING


OPTION CODE	DIM. 'A'
VS2	.461 11.70
VS3	.630 16.00



U2-VS3




3PDT

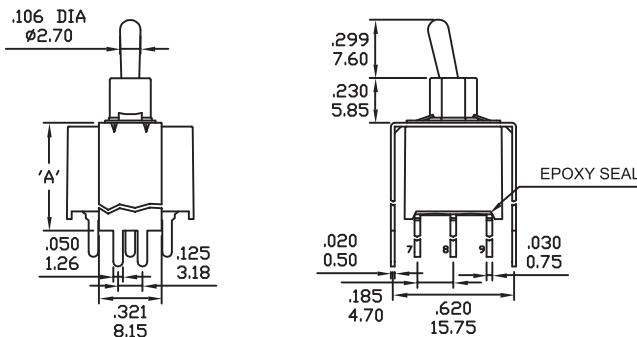

P.C.MOUNTING


OPTION CODE	DIM. 'A'
U2	.551 14.00
VS3	.630 16.00



VS4-VS5




SPDT

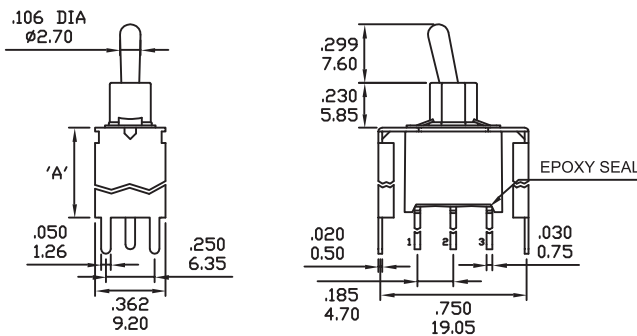

P.C.MOUNTING



OPTION CODE	DIM. 'A'
VS4	.461 11.70
VS5	.630 16.00




TERMINATION OPTIONS

VS4-VS5

P.C.MOUNTING





OPTION CODE	DIM.'A'
VS4	.461 11.70
VS5	.630 16.00




DPDT

U4-VS5

P.C.MOUNTING



OPTION CODE	DIM.'A'
U4	.551 14.00
VS5	.630 16.00





3PDT

SNAP-IN TERMINATION OPTIONS



M61

VS21,VS31

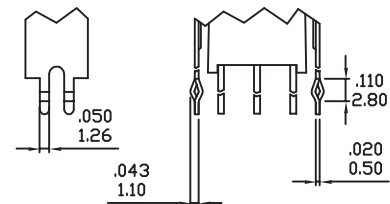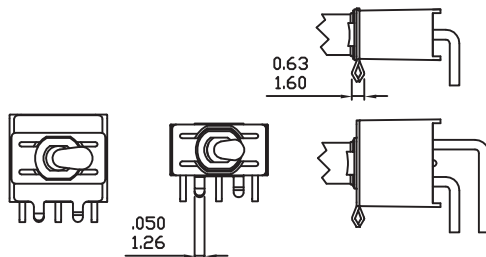

M71


VS41,VS51

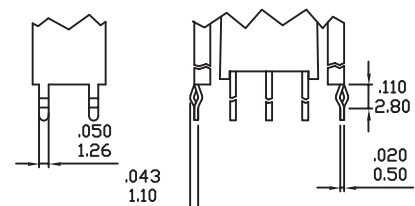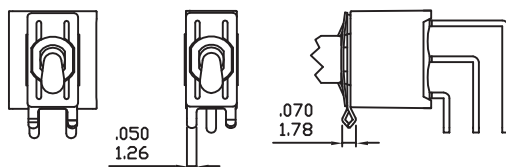


* PC Mounting for M61,M71,VS21,VS31,VS41,VS51 refer to M6,M7,VS2,VS3,VS4,VS5 respectively.

HARDWARE


NUT



LOCKING RING



LOCK WASHER



* Nut, locking ring and lock washer supplied standard with threaded bushings.

* Consult us for optional nut, locking ring and lock washer styles.

CONTACT MATERIAL OPTIONS

Coding	Contact Material	Terminal Plating	Rating	Agency Approvals
G	Silver ¹	Gold over silver ³	5Amps @ 125VAC or 28VDC 2Amps @ 250VAC	 IP67
P		Tin plated ^{5 7}		
R	Gold ²	Gold plated ⁴	0.4VA max @ 20V max (AC or DC)	IP67
K		Tin plated ^{5 6}		

* Standard G plating for sealed product.

1. Movable Contact: Copper alloy, silver plated.
2. Movable Contact: Copper alloy with gold plated over nickel plated.
3. Terminals: Silver plated with outer layer in gold plating.
4. Terminals: Copper alloy, with gold plated over nickel plated.
5. Outer Terminals: Copper alloy with pure tin plated.
6. Terminal Contact: Gold plated over nickel plated.
7. Terminal Contact: Palladium nickel alloy (or Silver) plated.

* P, K not available with M1 and M3 terminals.

* 6Amps (Movable Contact: coin silver, silver plated) available to model ON-NONE-ON without UL approval

* IP67 protection for 100A series only.