

SERIES:

MGDU1


COEV
MAGNETICS

tyco Electronics

3003 9th Avenue SW
PO Box 50
Watertown, SD 57201
Toll free: 888-978-2638
Ph: 605-886-3326
Fax: 605-886-8995



Low Profile, High Current Power Inductors

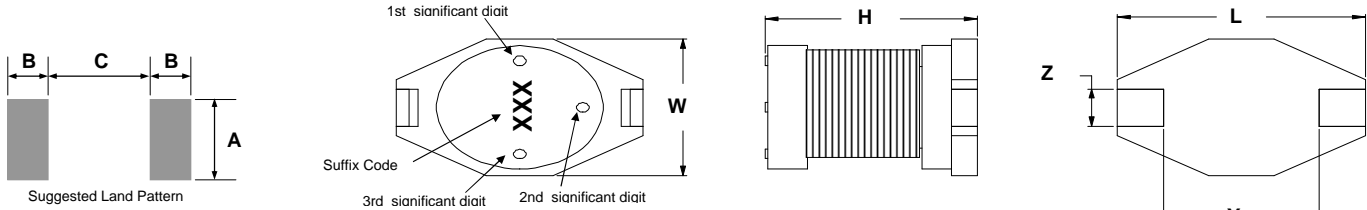

Parts will be marked with Significant Digit Dots OR Suffix code

Series Number	Maximum Dimensions				Reference Dimensions				
	Units	L	W	H	Y	Z	A	B	C
MGDU1	inches	0.260"	0.177"	0.115"	0.190"	0.050"	0.140"	0.055"	0.160"
	[mm]	[6.60]	[4.50]	[2.92]	[4.83]	[1.27]	[3.56]	[1.40]	[4.06]

Features:

- High energy storage and low resistance
- Ideal for DC-DC step-up or step-down conversion.
- Reliable surface mounting, flat top for pick and place mounting
- Robust temperature deflection to prevent damage during solder reflow.
- Operating Temperature -40°C to +85°C.






Terminal Plating is Gold Flash over Ni
260°C Maximum reflow temperature per J-STD020

Notes:

- Inductance measured at 100kHz, 100mVrms at 20°C.
- DCR (DC resistance) are maximum @ 20°C.
- Irms is the current applied to produce a typical 30°C temperature rise from nominal inductance.
- Isat is a maximum applied AC + DC current.
- Isat is the current applied to produce a typical 10% drop in nominal inductance
- Tolerance suffix of M = ±20%.

Schematic Diagram




Contact CoEv for additional inductance values

MGDU1					
Lead Free Part Number	L μH	DCR	I _{SAT}	I _{RMS}	Tolerance
		W	A	A	Suffix
MGDU1-00001	1.0	0.050	2.90	2.90	M
MGDU1-00002	1.5	0.050	2.60	2.80	M
MGDU1-00003	2.2	0.070	2.30	2.40	M
MGDU1-00004	3.3	0.080	2.00	2.00	M
MGDU1-00005	4.7	0.090	1.50	1.50	M
	5.6				
MGDU1-00006	6.8	0.130	1.20	1.40	M
	8.0				
MGDU1-00007	10	0.160	1.10	1.30	M
MGDU1-00008	15	0.230	0.90	1.20	M
MGDU1-00009	22	0.370	0.70	0.80	M
MGDU1-00010	33	0.510	0.58	0.60	M
MGDU1-00011	47	0.640	0.50	0.50	M
MGDU1-00012	68	0.860	0.40	0.40	M
MGDU1-00013	100	1.270	0.31	0.30	M
MGDU1-00014	150	2.000	0.27	0.25	M
MGDU1-00015	220	3.110	0.22	0.20	M
MGDU1-00016	330	4.800	0.18	0.16	M
MGDU1-00017	470	6.600	0.16	0.15	M
MGDU1-00018	680	9.200	0.10	0.12	M
MGDU1-00019	1000	13.800	0.10	0.07	M

Specifications subject to change

Call Toll Free: 888-978-2638 Website: www.tycopowercomponents.com

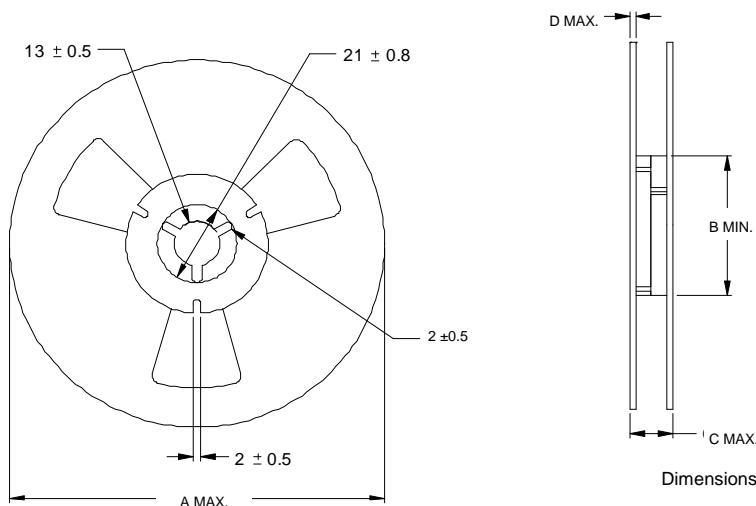

Dimensions are in millimeters unless specified.

Series Number	Reel dimensions					Reel Qty	Carton (Box) Qty.	Packaging Specification
	Units	A	B	C	D			
MGDU1	in.	12.99"	3.94"	0.88"	0.094"	2500	15000	90-0057
	[mm]	[360]	[100.0]	[22.4]	[2.40]			

PACKAGING NOTE: Only pressure sensitive cover tape is to be used.



CARRIER TAPE

START
TERMINAL
SIDE

PART

PART WILL EITHER HAVE
3 DIGIT CODE OR THREE DOT CODE
PART SHOULD BE ORIENTED
AS SHOWN WHERE "DDD"
INDICATES THE DIRECTION
OF PRINT FOR THE THREE
DIGIT CODE, THE DOTS SHOULD
BE ARRANGED AS SHOWN

COVER
TAPE

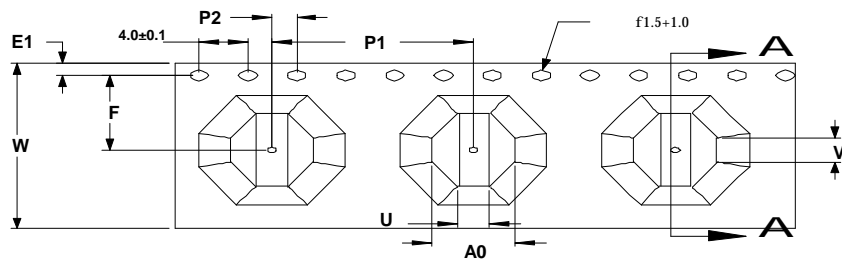

Series	A0 ± 0.1	U ± 0.1	V ± 0.1	P1 ± 0.1	P2 ± 0.1	W ± 0.3	F ± 0.1	E1 MIN.	B0 ± 0.1	K0 ± 0.05		T ± 0.05
MGDU1	4.55	1.45	2.70	8.00	2.00	16.00	5.5 ± 0.05	1.75	6.70	3.45		0.35



Customer Packaging Specifications
For Print Distribution to Customers

Series

MGDU1

Revision

A0

Sheet 2 of 7

Item	Specification	Test Method/Condition	
Environmental			
Static Humidity	After exposure part remains within specified electrical parameters for L, Q and DCR.	Expose parts to an environment of +50°C with 90 to 95% R.H. for 100 hours. After exposure, allow parts to dry for 2 hours before measurements are taken.	
Storage Life	After exposure part remains within specified electrical parameters for L, Q and DCR.	Subject parts to an environment of +50°C 90 to 100% R.H. for 46 to 50 hours. After exposure, allow parts to dry for 2 hours before measurements are taken.	
Moisture Resistance	After exposure, part shall not have a shorted or open winding.	Per MIL-STD 202 Method 106, ten 24 hour cycles at +25°C to +65°C at 80 to 95% R.H. During any of the first 9 cycles, inductors are revolved from the chamber and exposed to -10°C for 3 hours. Allow parts to dry for 2 hours before measurements are taken.	
Temperature Cycle	After exposure part remains within specified electrical parameters for L, Q and DCR.	10 cycles (Air to Air) 1 cycle shall consist of: 30 minutes exposure to +85°C 30 minutes exposure to -40°C Allow 20 minutes transition between extremes.	
Temperature Shock	After exposure part remains within specified electrical parameters for L, Q and DCR.	10 cycles (Air to Air) 1 cycle shall consist of: 30 minutes exposure to -45°C 30 minutes exposure to +125°C 15 seconds maximum transition between temperatures	
General			
Storage Temperature Range	-40°C to +85°C		
Operating Temperature Range	-40°C to +85°C		
Flammability	IEC 695-2-2	Withstands needle-flame test	
Other			
Vibration	After exposure part remains within specified electrical parameters for L, Q and DCR.	Inductors shall be randomly vibrated per NAVMAT P9492 profile. Samples shall be subjected to 0.04G/Hz for a minimum of 15 minutes per axis, for each of the three axes.	
Mechanical Shock	After exposure part remains within specified electrical parameters for L, Q and DCR.	Test per MIL-STD 202 method 213 test condition A, test mounted samples 3 axes, 6 times, totaling 18 shocks. (50Gs, 11ms, half-sine).	
Solderability	Wetting shall cover 90% minimum of each termination	Dip pads in RMA flux, 63/37 solder (Sn/Pb) at 232°C for 5 seconds ±2 seconds.	
Component Adhesion (Push Test)	4 pounds	Apply and measure force with a digital force gauge set.	
Resistance to Solvent	No sign of degradation in appearance or marking detail.	Withstands 6 minutes of alcohol. Withstands 3 minutes forced spray Freon TMS	
Load Life	After exposure, part shall not have a shorted or open winding.	Parts to be stored at 110°C for 1000 hours with rated current applied. Parts to be tested at: start, 500 and 1000 hours. Allow 2 hours at room temperature before testing.	
For Print Distribution to Customers		<div><div><div>Pb</div></div><div>RoHS Compliant</div></div>	
		Series	Revision
		MGDU1	A0
Sheet 3 of 7			