




### Phototriac coupler ideal for triac driver with wide variation

### APT Phototriac Coupler

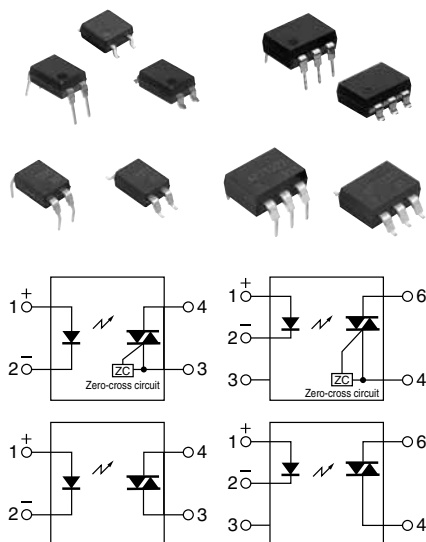


RoHS compliant

### FEATURES

**1. Low zero-cross voltage (max. 15 V) type added to lineup. Approximately 1/3 of previous product**

Helps reduce device noises even further.

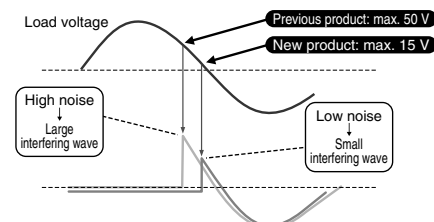

**2. Two types available: Random type and zero-cross type**

**3. Many package sizes available. (Wide terminal type with 10.16 mm pitch between I/O terminals available.)**

**4. High dielectric strength. (Between input and output: SOP 3, 750 V; DIP 5,000 V)**

**5. Handles both 100 and 200 V AC loads**

This relay handles both voltages in a single product it is not necessary for users that use both types to manage separate part numbers.

**6. Terminal 5 of the DIP 6-pin type is completely molded.**

**7. Complies with safety standards**

SOP4pin:

C-UL (UL1577) Certified

VDE (EN60747-5-5) Certified

DIP4/6pin:

C-UL (UL1577) Certified

VDE (EN60747-5-5) Certified

VDE (EN60950-1, EN60065)

Reinforced insulation certified

### TYPICAL APPLICATIONS

**1. For triac driver in heater controls of products such as office equipment, home appliances, and industrial machines. (For 100V/200V, 50/60 Hz lines)**

**2. Triac driver for SSRs**

### TYPES

#### 1. SOP4 Type

| Type    | Output rating                     |                      | Type                   | Package size | Part No.           |                                             |                                             | Packing quantity                                          |               |
|---------|-----------------------------------|----------------------|------------------------|--------------|--------------------|---------------------------------------------|---------------------------------------------|-----------------------------------------------------------|---------------|
|         | Repetitive peak OFF-state voltage | ON-state RMS current |                        |              | Tube packing style | Tape and reel packing style                 |                                             | Tube                                                      | Tape and reel |
| AC type | 600 V                             | 50 mA                | Zero-cross (max. 50 V) | SOP4pin      | APT1211S           | APT1211SX<br>(Picked from the 1/2-pin side) | APT1211SZ<br>(Picked from the 3/4-pin side) | 1 tube contains: 100 pcs.<br>1 batch contains: 2,000 pcs. | 1,000 pcs.    |
|         |                                   |                      | Zero-cross (max. 15 V) |              | APT1231S           | APT1231SX<br>(Picked from the 1/2-pin side) | APT1231SZ<br>(Picked from the 3/4-pin side) |                                                           |               |
|         |                                   |                      | Random                 |              | APT1221S           | APT1221SX<br>(Picked from the 1/2-pin side) | APT1221SZ<br>(Picked from the 3/4-pin side) |                                                           |               |

Note: For space reasons, the initial letters of the product number "APT" and "S" are omitted on the product seal.

The package type indicator "X" and "Z" are omitted from the seal. (Ex. the label for product number APT1221SZ is 1221).

2. DIP4/6 Type

| Type    | Output rating                     |                      | Type                   | Package size | Part No.              |                        |                                               |                                             | Packing quantity                                                       |                                      |
|---------|-----------------------------------|----------------------|------------------------|--------------|-----------------------|------------------------|-----------------------------------------------|---------------------------------------------|------------------------------------------------------------------------|--------------------------------------|
|         | Repetitive peak OFF-state voltage | ON-state RMS current |                        |              | Through hole terminal | Surface-mount terminal |                                               |                                             | Tube                                                                   | Tape and reel                        |
|         |                                   |                      |                        |              | Tube packing style    |                        | Tape and reel packing style                   |                                             |                                                                        |                                      |
| AC type | 600 V                             | 100 mA               | Zero-cross (max. 50 V) | DIP4pin      | APT1211               | APT1211A               | APT1211AX<br>(Picked from the 1/2-pin side)   | APT1211AZ<br>(Picked from the 3/4-pin side) | [DIP4pin]<br>1 tube contains: 100 pcs.<br>1 batch contains: 1,000 pcs. | [DIP4pin]<br>[DIP6pin]<br>1,000 pcs. |
|         |                                   |                      | Zero-cross (max. 15 V) |              | APT1231               | APT1231A               | APT1231AX<br>(Picked from the 1/2-pin side)   | APT1231AZ<br>(Picked from the 3/4-pin side) |                                                                        |                                      |
|         |                                   |                      | Random                 |              | APT1221               | APT1221A               | APT1221AX<br>(Picked from the 1/2-pin side)   | APT1221AZ<br>(Picked from the 3/4-pin side) |                                                                        |                                      |
|         |                                   |                      | Zero-cross (max. 50 V) | DIP6pin      | APT1212               | APT1212A               | APT1212AX<br>(Picked from the 1/2/3-pin side) | APT1212AZ<br>(Picked from the 4/6-pin side) | [DIP6pin]<br>1 tube contains: 50 pcs.<br>1 batch contains: 500 pcs.    |                                      |
|         |                                   |                      | Zero-cross (max. 15 V) |              | APT1232               | APT1232A               | APT1232AX<br>(Picked from the 1/2/3-pin side) | APT1232AZ<br>(Picked from the 4/6-pin side) |                                                                        |                                      |
|         |                                   |                      | Random                 |              | APT1222               | APT1222A               | APT1222AX<br>(Picked from the 1/2/3-pin side) | APT1222AZ<br>(Picked from the 4/6-pin side) |                                                                        |                                      |

Note: For space reasons the initial letters “APT” of the product number for the DIP 4-pin type, the letter “A”, which indicates the SMD terminal shape for the DIP 4-pin and 6-pin types, and the package type indications “X” and “Z” have been omitted from the product label. (Example: The label for product number APT1221AZ is 1221.)

3. DIP4/6 Wide Terminal Type

| Type    | Output rating*                    |                      | Type                   | Package size | Part No.              |                        |                                              |                                              | Packing quantity                                                       |                                      |
|---------|-----------------------------------|----------------------|------------------------|--------------|-----------------------|------------------------|----------------------------------------------|----------------------------------------------|------------------------------------------------------------------------|--------------------------------------|
|         | Repetitive peak OFF-state voltage | ON-state RMS current |                        |              | Through hole terminal | Surface-mount terminal |                                              |                                              | Tube                                                                   | Tape and reel                        |
|         |                                   |                      |                        |              | Tube packing style    |                        | Tape and reel packing style                  |                                              |                                                                        |                                      |
| AC type | 600 V                             | 100 mA               | Zero-cross (max. 50 V) | DIP4pin      | APT1211W              | APT1211WA              | APT1211WAY<br>(Picked from the 1/4-pin side) | APT1211WAW<br>(Picked from the 2/3-pin side) | [DIP4pin]<br>1 tube contains: 100 pcs.<br>1 batch contains: 1,000 pcs. | [DIP4pin]<br>[DIP6pin]<br>1,000 pcs. |
|         |                                   |                      | Zero-cross (max. 15 V) |              | APT1231W              | APT1231WA              | APT1231WAY<br>(Picked from the 1/4-pin side) | APT1231WAW<br>(Picked from the 2/3-pin side) |                                                                        |                                      |
|         |                                   |                      | Random                 |              | APT1221W              | APT1221WA              | APT1221WAY<br>(Picked from the 1/4-pin side) | APT1221WAW<br>(Picked from the 2/3-pin side) |                                                                        |                                      |
|         |                                   |                      | Zero-cross (max. 50 V) | DIP6pin      | APT1212W              | APT1212WA              | APT1212WAY<br>(Picked from the 1/6-pin side) | APT1212WAW<br>(Picked from the 3/4-pin side) | [DIP6pin]<br>1 tube contains: 50 pcs.<br>1 batch contains: 500 pcs.    |                                      |
|         |                                   |                      | Zero-cross (max. 15 V) |              | APT1232W              | APT1232WA              | APT1232WAY<br>(Picked from the 1/6-pin side) | APT1232WAW<br>(Picked from the 3/4-pin side) |                                                                        |                                      |
|         |                                   |                      | Random                 |              | APT1222W              | APT1222WA              | APT1222WAY<br>(Picked from the 1/6-pin side) | APT1222WAW<br>(Picked from the 3/4-pin side) |                                                                        |                                      |

Note: For space reasons the initial letters “APT” of the product number for the DIP 4-pin type, the letter “WA”, which indicates the SMD terminal shape for the DIP 4-pin and 6-pin types, and the package type indications “Y” and “W” have been omitted from the product label. (Example: The label for product number APT1221WAY is 1221.)

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

1) SOP4 types

| Item                    |                                   | Symbol              | APT1211S, APT1221S, APT1231S | Remarks                          |
|-------------------------|-----------------------------------|---------------------|------------------------------|----------------------------------|
| Input                   | LED forward current               | I <sub>F</sub>      | 50 mA                        |                                  |
|                         | LED reverse voltage               | V <sub>R</sub>      | 6 V                          |                                  |
|                         | Peak forward current              | I <sub>FP</sub>     | 1 A                          | f = 100 Hz,<br>Duty Ratio = 0.1% |
| Output                  | Repetitive peak OFF-state voltage | V <sub>DRM</sub>    | 600 V                        |                                  |
|                         | ON-state RMS current*             | I <sub>T(RMS)</sub> | 0.05 A                       | AC                               |
|                         | Non-repetitive surge current      | I <sub>TSM</sub>    | 0.6 A                        | In one cycle at 60Hz             |
| Total power dissipation |                                   | P <sub>T</sub>      | 350 mW                       |                                  |
| I/O isolation voltage   |                                   | V <sub>iso</sub>    | 3,750 V AC                   |                                  |
| Temperature limits      |                                   | Operating           | T <sub>opr</sub>             | −40°C to +100°C −40°F to +212°F  |
|                         |                                   | Storage             | T <sub>stg</sub>             | −40°C to +125°C −40°F to +257°F  |

Note: “X” and “Z” at the end of the part numbers have been omitted.

## 2) DIP4/6 type and DIP4/6 Wide terminal type

| Item                    |                                   | Symbol       | APT1211(W), APT1221(W), APT1231(W), APT1212(W), APT1222(W), APT1232(W)                  | Remarks                                     |
|-------------------------|-----------------------------------|--------------|-----------------------------------------------------------------------------------------|---------------------------------------------|
| Input                   | LED forward current               | $I_F$        | 50 mA                                                                                   |                                             |
|                         | LED reverse voltage               | $V_R$        | 6 V                                                                                     |                                             |
|                         | Peak forward current              | $I_{FP}$     | 1 A                                                                                     | $f = 100 \text{ Hz}$ ,<br>Duty Ratio = 0.1% |
| Output                  | Repetitive peak OFF-state voltage | $V_{DRM}$    | 600 V                                                                                   |                                             |
|                         | ON-state RMS current*             | $I_{T(RMS)}$ | 0.1 A                                                                                   | AC                                          |
|                         | Non-repetitive surge current      | $I_{TSM}$    | 1.2 A                                                                                   | In one cycle at 60Hz                        |
| Total power dissipation |                                   | $P_T$        | 500 mW                                                                                  |                                             |
| I/O isolation voltage   |                                   | $V_{iso}$    | 5,000 V AC                                                                              |                                             |
| Temperature limits      | Operating                         | $T_{opr}$    | $-40^\circ\text{C}$ to $+100^\circ\text{C}$ $-40^\circ\text{F}$ to $+212^\circ\text{F}$ | Non-condensing at low temperatures          |
|                         | Storage                           | $T_{stg}$    | $-40^\circ\text{C}$ to $+125^\circ\text{C}$ $-40^\circ\text{F}$ to $+257^\circ\text{F}$ |                                             |

Note: "A", "AX", "AZ" "AY" and "AW" at the end of the part numbers have been omitted.

\* Do not exceed 0.05 A of ON state RMS current in case of following load voltage condition.

DIP4pin (APT1211, APT1221, APT1231) and DIP4pin wide terminal type (APT1211W, APT1221W, APT1231W): more than 100 V AC;  
DIP6pin (APT1212, APT1222, APT1232) and DIP6pin wide terminal type (APT1212W, APT1222W, APT1232W): more than 120 V AC.

2. Characteristics (Ambient temperature:  $25^\circ\text{C}$   $77^\circ\text{F}$ )


## 1) Zero-cross type (max. 50V) and random type

| Item                     |                                            |         | Symbol    | APT1211S, APT1211(W), APT1212(W) | APT1221S, APT1221(W), APT1222(W) | Condition                                                          |
|--------------------------|--------------------------------------------|---------|-----------|----------------------------------|----------------------------------|--------------------------------------------------------------------|
| Input                    | LED dropout voltage                        | Typical | $V_F$     | 1.21 V                           |                                  | $I_F = 20 \text{ mA}$                                              |
|                          |                                            | Maximum |           | 1.3 V                            |                                  |                                                                    |
|                          | LED reverse current                        | Typical | $I_R$     | —                                |                                  | $V_R = 6 \text{ V}$                                                |
|                          |                                            | Maximum |           | 10 $\mu\text{A}$                 |                                  |                                                                    |
| Output                   | Repetitive peak OFF-state current          | Typical | $I_{DRM}$ | —                                |                                  | $I_F = 0 \text{ mA}$                                               |
|                          |                                            | Maximum |           | 1 $\mu\text{A}$                  |                                  | $V_{DRM} = 600 \text{ V}$                                          |
|                          | Repetitive peak On-state voltage           | Typical | $V_{TM}$  | 1.3 V                            |                                  | $I_F = 10 \text{ mA}$                                              |
|                          |                                            | Maximum |           | 2.5 V                            |                                  | $I_{TM} = 0.05 \text{ A}$                                          |
|                          | Holding current                            | Typical | $I_H$     | 0.3 mA                           |                                  |                                                                    |
|                          |                                            | Maximum |           | 3.5 mA                           |                                  |                                                                    |
| Transfer characteristics | Critical rate of rise of OFF-state voltage | Minimum | $dv/dt$   | 500 V/ $\mu\text{s}$             |                                  | $V_{DRM} = 600 \text{ V} \times 1/\sqrt{2}$                        |
|                          | Trigger LED current                        | Maximum | $I_{FT}$  | 10 mA                            |                                  | $V_D = 6 \text{ V}$<br>$R_L = 100 \Omega$                          |
|                          | Zero-cross voltage                         | Maximum | $V_{ZC}$  | 50 V                             | —                                | $I_F = 10 \text{ mA}$                                              |
|                          | Turn on time*                              | Maximum | $T_{on}$  | 100 $\mu\text{s}$                |                                  | $I_F = 20 \text{ mA}$<br>$V_D = 6 \text{ V}$<br>$R_L = 100 \Omega$ |
|                          | I/O capacitance                            | Maximum | $C_{iso}$ | 1.5 pF                           |                                  | $f = 1 \text{ MHz}$<br>$V_B = 0 \text{ V}$                         |
|                          | I/O isolation resistance                   | Minimum | $R_{iso}$ | 50 G $\Omega$                    |                                  | 500 V DC                                                           |

Notes: 1. For type of connection, see page 9.

2. Terminals are either solder plated or solder dipped.

## \*Turn on time

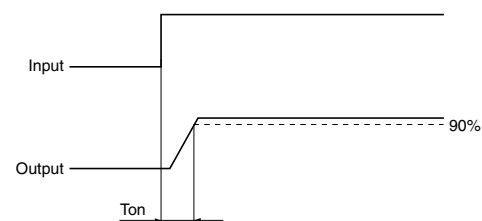


2) Zero-cross type (max. 15V)

| Item                     |                                            |         | Symbol           | APT1231S, APT1231(W), APT1232(W) | Condition                                          |
|--------------------------|--------------------------------------------|---------|------------------|----------------------------------|----------------------------------------------------|
| Input                    | LED dropout voltage                        | Typical | V <sub>F</sub>   | 1.21 V                           | I <sub>F</sub> = 20 mA                             |
|                          |                                            | Maximum |                  | 1.3 V                            |                                                    |
|                          | LED reverse current                        | Typical | I <sub>R</sub>   | —                                | V <sub>R</sub> = 6 V                               |
|                          |                                            | Maximum |                  | 10 μA                            |                                                    |
| Output                   | Repetitive peak OFF-state current          | Typical | I <sub>DRM</sub> | —                                | I <sub>F</sub> = 0 mA                              |
|                          |                                            | Maximum |                  | 1 μA                             | V <sub>DRM</sub> = 600 V                           |
|                          | Repetitive peak On-state voltage           | Typical | V <sub>TM</sub>  | 1.2 V                            | I <sub>F</sub> = 10 mA                             |
|                          |                                            | Maximum |                  | 2 V                              | I <sub>TM</sub> = 0.03 A                           |
|                          | Holding current                            | Typical | I <sub>H</sub>   | 0.3 mA                           |                                                    |
|                          |                                            | Maximum |                  | 3.5 mA                           |                                                    |
|                          | Critical rate of rise of OFF-state voltage | Minimum | dv/dt            | 500 V/μs                         | V <sub>DRM</sub> = 600 V × 1/√2                    |
| Transfer characteristics | Trigger LED current                        | Maximum | I <sub>FT</sub>  | 10 mA                            | I <sub>TM</sub> = 0.03 A                           |
|                          | Zero-cross voltage                         | Maximum | V <sub>ZC</sub>  | 15 V                             | I <sub>F</sub> = 10 mA                             |
|                          | Turn on time*                              | Maximum | T <sub>on</sub>  | 100 μs                           | I <sub>F</sub> = 20 mA<br>I <sub>TM</sub> = 0.03 A |
|                          | I/O capacitance                            | Maximum | C <sub>iso</sub> | 1.5 pF                           | f = 1 MHz<br>V <sub>B</sub> = 0 V                  |
|                          | I/O isolation resistance                   | Minimum | R <sub>iso</sub> | 50 GΩ                            | 500 V DC                                           |

Notes: 1. For type of connection, see page 9.  
2. Terminals are either solder plated or solder dipped.

\*Turn on time

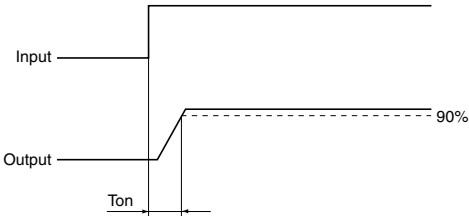

RECOMMENDED OPERATING CONDITIONS

Please follow the conditions below in order to ensure accurate operation and release of the phototriac coupler.


| Item              | Symbol         | Value | Unit |
|-------------------|----------------|-------|------|
| Input LED current | I <sub>F</sub> | 20    | mA   |

REFERENCE DATA

1-(1). ON-state RMS current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +100°C  
-40°F to +212°F


Tested sample: APT1211S, APT1221S

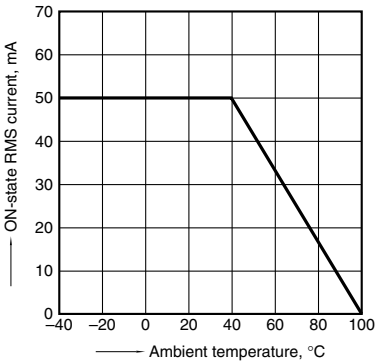

1-(2). ON-state RMS current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +100°C  
-40°F to +212°F


Tested sample: APT1231S

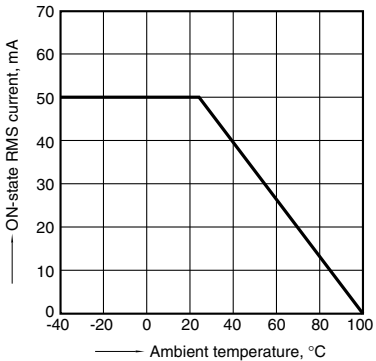


1-(3). ON-state RMS current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +100°C  
-40°F to +212°F


Tested sample: APT1211(A), APT1221(A),  
APT1211W(A), APT1221W(A)

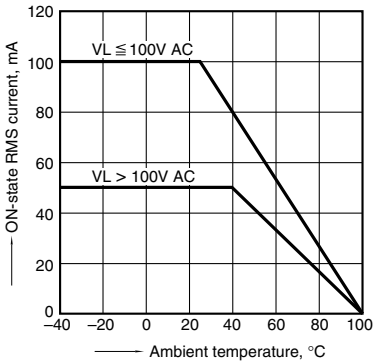


1-(4). ON-state RMS current vs. ambient temperature characteristics  
Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+212^{\circ}\text{F}$   
Tested sample: APT1231(A), APT1231W(A)

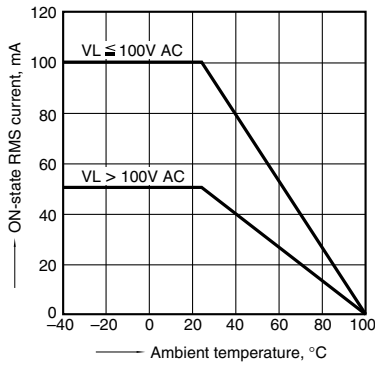


1-(5). ON-state RMS current vs. ambient temperature characteristics  
Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+212^{\circ}\text{F}$   
Tested sample: APT1212(A), APT1222(A), APT1212W(A), APT1222W(A)

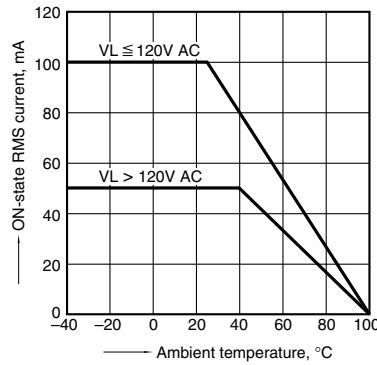


1-(6). ON-state RMS current vs. ambient temperature characteristics  
Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+212^{\circ}\text{F}$   
Tested sample: APT1232(A), APT1232W(A)

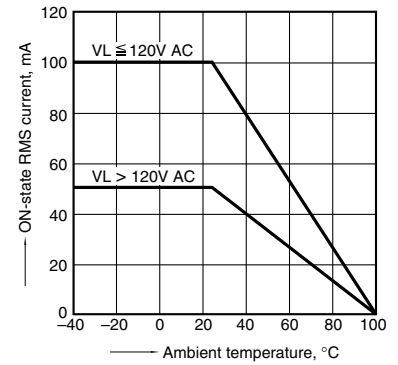


2. On voltage vs. ambient temperature characteristics

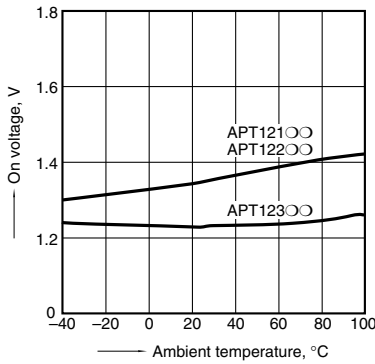


3. Trigger LED current vs. ambient temperature characteristics

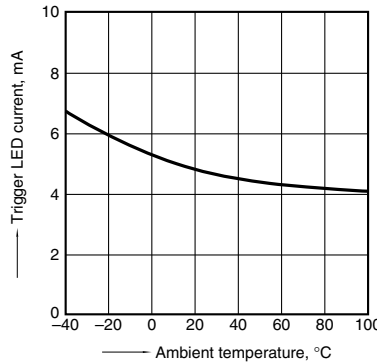


4. LED dropout voltage vs. ambient temperature characteristics

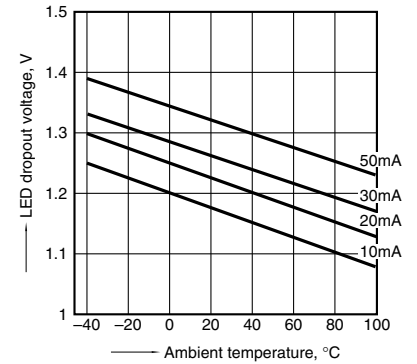


5. Turn on time vs. LED current characteristics

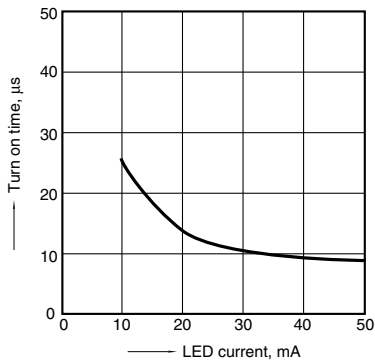


6. Repetitive peak OFF-state current vs. Load voltage characteristics

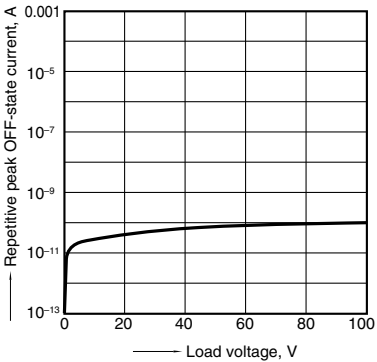

7. Hold current vs. ambient temperature characteristics

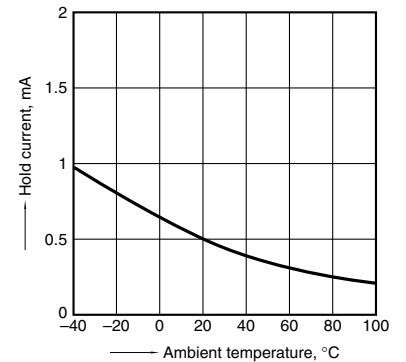

8. Zero-cross voltage vs. ambient temperature characteristics

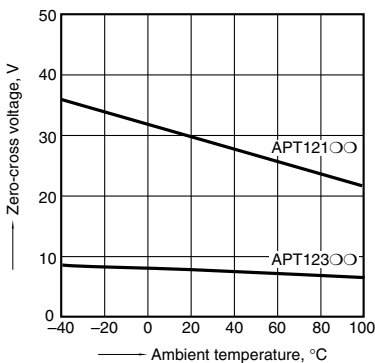

# DIMENSIONS (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>


## 1. SOP Type

APT1211S, APT1221S, APT1231S


### CAD Data



External dimensions



Recommended mounting pad (TOP VIEW)



Tolerance:  $\pm 0.1 \pm .004$

Terminal thickness = 0.15 .006

General tolerance:  $\pm 0.1 \pm .004$

## 2. DIP4 Type


APT1211(A), APT1221(A), APT1231(A)

### CAD Data




External dimensions

Through hole terminal type

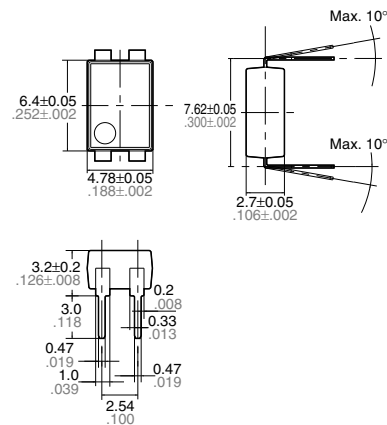


Surface mount terminal type

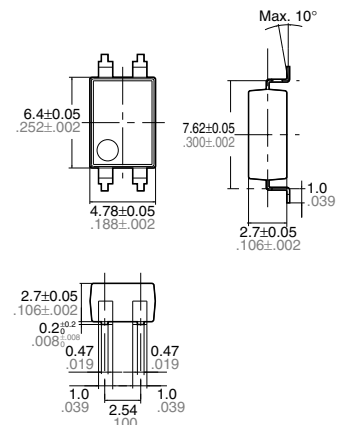

Terminal thickness = 0.20 .008


General tolerance:  $\pm 0.1 \pm .004$

PC board pattern (BOTTOM VIEW)



Tolerance:  $\pm 0.1 \pm .004$

Recommended mounting pad (TOP VIEW)



Tolerance:  $\pm 0.1 \pm .004$


### 3. DIP4 Wide Terminal Type

APT1211W(A), APT1221W(A), APT1231W(A)

#### CAD Data




Through hole terminal type

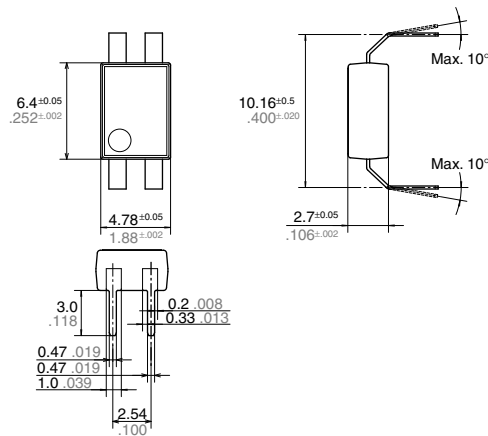


External dimensions

Surface mount terminal type

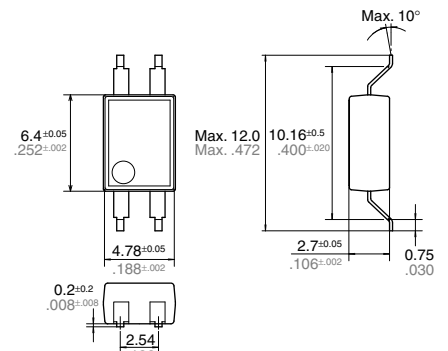


Terminal thickness = 0.20 / .008  
General tolerance:  $\pm$ 0.1 /  $\pm$ .004

PC board pattern (BOTTOM VIEW)



Tolerance:  $\pm$ 0.1 /  $\pm$ .004

Recommended mounting pad (TOP VIEW)



Tolerance:  $\pm$ 0.1 /  $\pm$ .004


### 4. DIP6 Type

APT1212(A), APT1222(A), APT1232(A)

#### CAD Data




Through hole terminal type

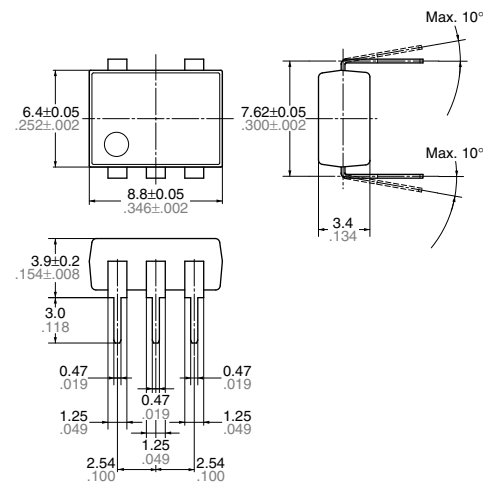


External dimensions

Surface mount terminal type

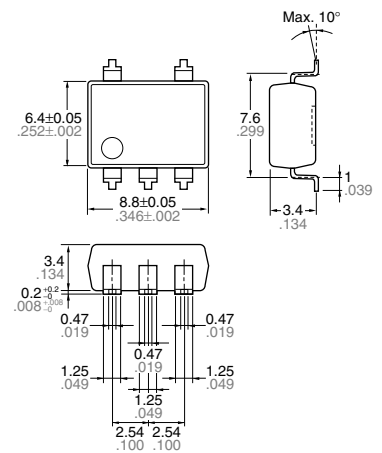


Terminal thickness = 0.25 / .010  
General tolerance:  $\pm$ 0.1 /  $\pm$ .004

PC board pattern (BOTTOM VIEW)



Tolerance:  $\pm$ 0.1 /  $\pm$ .004

Recommended mounting pad (TOP VIEW)



Tolerance:  $\pm$ 0.1 /  $\pm$ .004








5. DIP6 Wide Terminal Type  
APT1212W(A), APT1222W(A), APT1232W(A)

CAD Data

External dimensions

Through hole terminal type



Surface mount terminal type

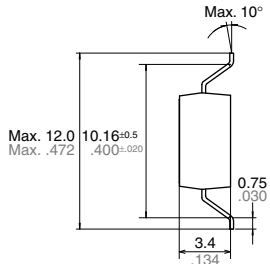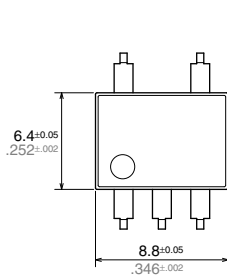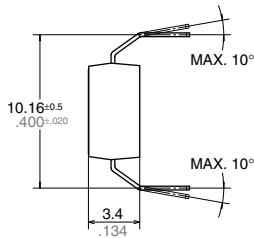

Terminal thickness = 0.25 ± 0.010  
General tolerance: ±0.1 ± 0.004

PC board pattern (BOTTOM VIEW)

Recommended mounting pad (TOP VIEW)









Tolerance: ±0.1 ± 0.004

Tolerance: ±0.1 ± 0.004

SCHEMATIC AND WIRING DIAGRAMS

Notes: E1: Power source at input side; IF: LED forward current; VL: Load voltage; IL: Load current
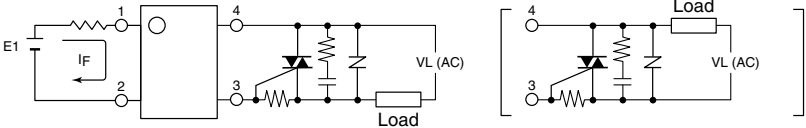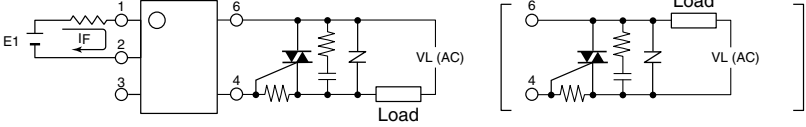
| Schematic                                                                         | Output configuration | Load | Wiring diagram                                                                     |
|-----------------------------------------------------------------------------------|----------------------|------|------------------------------------------------------------------------------------|
|  | 1 Form A             | AC   |  |
|  |                      |      |                                                                                    |
|  |                      |      |  |
|  |                      |      |                                                                                    |