THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	REVISED PER ECO-11-004820	21MAR11	RK	HMR

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING

4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.

5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, OVER 0.00127 [.000050] NICKEL, ENTIRE POST.

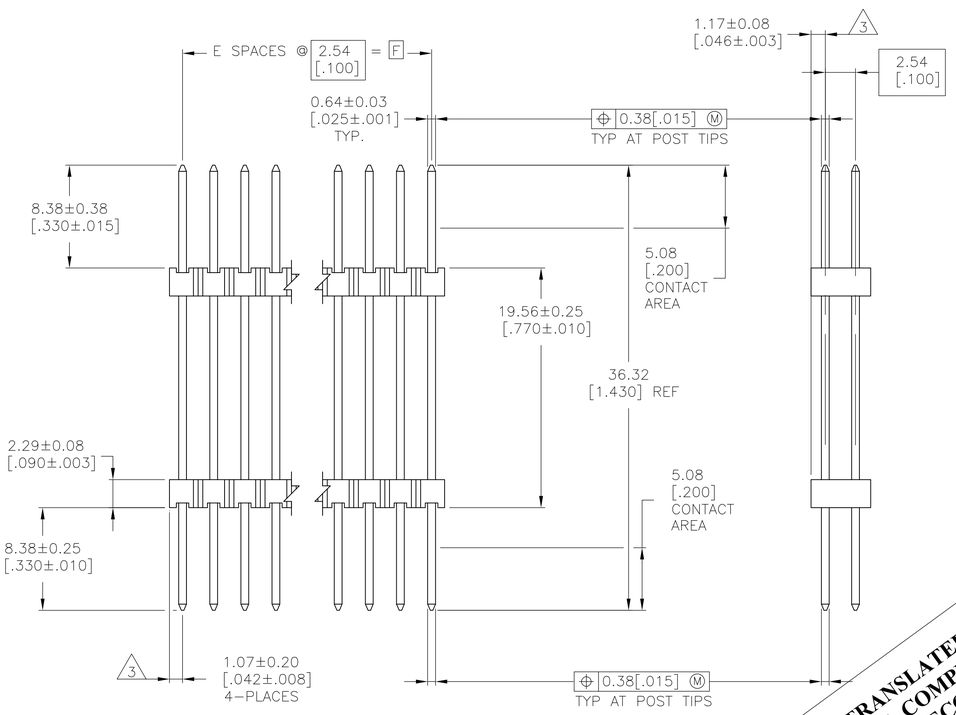

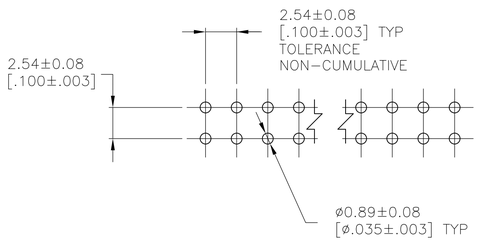

RECOMMENDED HOLE LAYOUT

THIS DRAWING HAS BEEN TRANSLATED AND REFLECTS THE PREVIOUS REVISION. IT WILL REQUIRE A COMPLETE DRAWING CHECK BY PRODUCT ENGINEERING WHEN THE NEXT ECO CHANGE IS WRITTEN - THIS MAY REQUIRE A CHANGE TO THE REVISION OF THE DOCUMENT MANAGER FOLDER AND THIS DRAWING.

G	F	E	NO. OF POSITIONS	PART NUMBER
101.19 [3.984]	99.06 [3.900]	39	80	4-146510-0
98.65 [3.884]	96.52 [3.800]	38	78	3-146510-9
96.11 [3.784]	93.98 [3.700]	37	76	3-146510-8
93.57 [3.684]	91.44 [3.600]	36	74	3-146510-7
91.03 [3.584]	88.90 [3.500]	35	72	3-146510-6
88.49 [3.484]	86.36 [3.400]	34	70	3-146510-5
85.95 [3.384]	83.82 [3.300]	33	68	3-146510-4
83.41 [3.284]	81.28 [3.200]	32	66	3-146510-3
80.87 [3.184]	78.74 [3.100]	31	64	3-146510-2
78.33 [3.084]	76.20 [3.000]	30	62	3-146510-1
75.79 [2.984]	73.66 [2.900]	29	60	3-146510-0
73.25 [2.884]	71.12 [2.800]	28	58	2-146510-9
70.71 [2.784]	68.58 [2.700]	27	56	2-146510-8
68.17 [2.684]	66.04 [2.600]	26	54	2-146510-7
65.63 [2.584]	63.50 [2.500]	25	52	2-146510-6
63.09 [2.484]	60.96 [2.400]	24	50	2-146510-5
60.55 [2.384]	58.42 [2.300]	23	48	2-146510-4
58.01 [2.284]	55.88 [2.200]	22	46	2-146510-3
55.47 [2.184]	53.34 [2.100]	21	44	2-146510-2
52.93 [2.084]	50.80 [2.000]	20	42	2-146510-1
50.39 [1.984]	48.26 [1.900]	19	40	2-146510-0
47.85 [1.884]	45.72 [1.800]	18	38	1-146510-9
45.31 [1.784]	43.18 1.700]	17	36	1-146510-8
42.77 [1.684]	40.64 [1.600]	16	34	1-146510-7
40.23 [1.584]	38.10 [1.500]	15	32	1-146510-6
37.69 [1.484]	35.56 [1.400]	14	30	1-146510-5
35.15 [1.384]	33.02 [1.300]	13	28	1-146510-4
32.61 [1.284]	30.48 [1.200]	12	26	1-146510-3
30.07 [1.184]	27.94 [1.100]	11	24	1-146510-2
27.53 [1.084]	25.40 [1.000]	10	22	1-146510-1
24.99 [.984]	22.86 [.900]	9	20	1-146510-0
22.45 [.884]	20.32 [.800]	8	18	146510-9
19.91 [.784]	17.78 [.700]	7	16	146510-8
17.37 [.684]	15.24 [.600]	6	14	146510-7
14.83 [.584]	12.70 [.500]	5	12	146510-6
12.29 [.484]	10.16 [.400]	4	10	146510-5
9.75 [.384]	7.62 [.300]	3	8	146510-4
7.21 [.284]	5.08 [.200]	2	6	146510-3
4.67 [.184]	2.54 [.100]	1	4	146510-2
2.13 [.084]	— —	—	2	146510-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.51[.02]
3 PLC ± 0.127[.005]
4 PLC ± 0.0127[.0005]
ANGLES ±

MATERIAL 4

FINISH 5

DWN E. BRANDBERG 12NOV96
CHK G. DUBNICZKI 12NOV96
APVD G. DUBNICZKI 12NOV96

PRODUCT SPEC —

APPLICATION SPEC —

WEIGHT —

CUSTOMER DRAWING

TE Connectivity

NAME HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-146510	—

SCALE 4:1 SHEET 1 OF 1 REV P

4805 (3/11)