


SN54ALS2540, SN54ALS2541, SN74ALS2540, SN74ALS2541 OCTAL LINE DRIVERS/MOS DRIVERS WITH 3-STATE OUTPUTS

JUNE 1984—REVISED MAY 1986

- 3-State Outputs Drive Bus Lines or Buffer Memory Address Registers
- P-N-P Inputs Reduce DC Loading
- Outputs Have 25-Ω Series Resistor, So No External Resistors are Required
- Package Options Include Plastic "Small Outline" Packages, Plastic and Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

SN54ALS2540, SN54ALS2541 . . . J PACKAGE
SN74ALS2540, SN74ALS2541 . . . DW OR N PACKAGE

(TOP VIEW)



description

These octal buffers and line drivers are designed to drive capacitive input characteristics of MOS devices and have the performance of the popular SN54ALS240A/SN74ALS240A series. At the same time, they offer a pinout with inputs and outputs on opposite sides of the package. This arrangement greatly enhances printed-circuit-board layout.


The three-state control gate is a 2-input AND with active-low inputs such that if either $\bar{G}1$ or $\bar{G}2$ is high, all eight outputs are in the high-impedance state.

The 'ALS2540 offers inverting data and the 'ALS2541 offers true data at the outputs.

The SN54ALS' is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS' is characterized for operation from 0°C to 70°C .

SN54ALS2540, SN54ALS2541 . . . FK PACKAGE


(TOP VIEW)

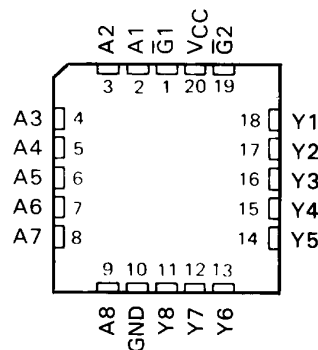

SN54ALS2540, SN54ALS2541, SN74ALS2540, SN74ALS2541 **OCTAL LINE DRIVERS/MOS DRIVERS WITH 3-STATE OUTPUTS**


JUNE 1984—REVISED MAY 1986

logic symbols[†]

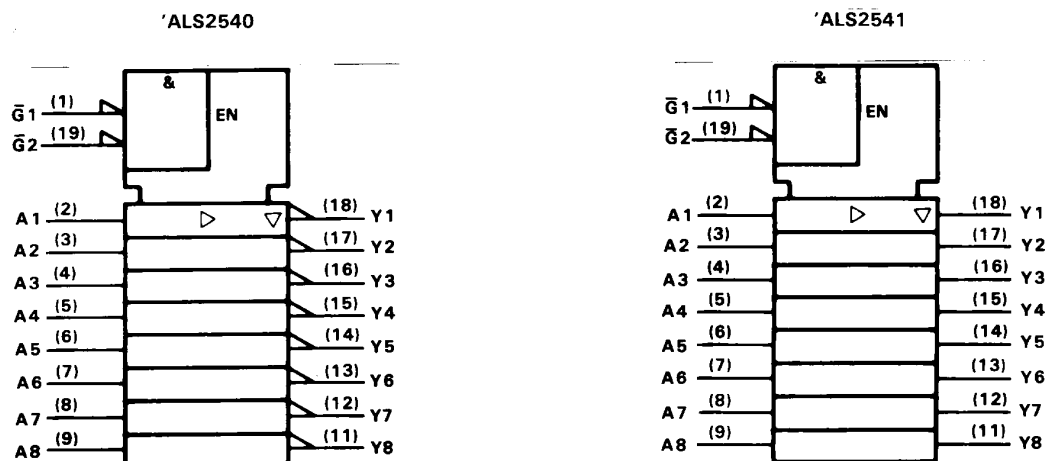

[†]These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagrams (positive logic)

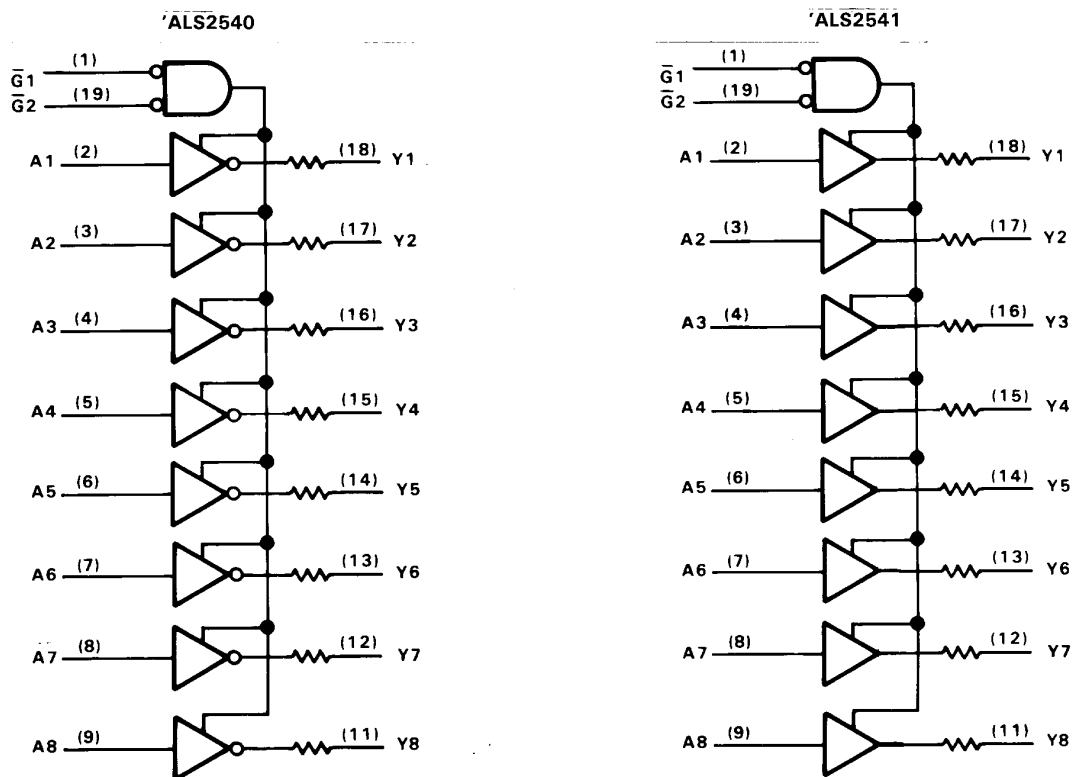

All output resistors are 25 Ω.

SN54ALS2540, SN54ALS2541, SN74ALS2540, SN74ALS2541 OCTAL LINE DRIVERS/MOS DRIVERS WITH 3-STATE OUTPUTS

JUNE 1984—REVISED MAY 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Voltage applied to a disabled 3-state output	5.5 V
Operating free-air temperature range: SN54ALS2540, SN54ALS2541	–55°C to 125°C
SN74ALS2540, SN74ALS2541	0°C to 70°C
Storage temperature range	–65°C to 150°C

recommended operating conditions

		SN54ALS2540 SN54ALS2541			SN74ALS2540 SN74ALS2541			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.7			0.8	V
I_{OH}	High-level output current			–0.4			–0.4	mA
I_{OL}	Low-level output current			12			12	mA
T_A	Operating free-air temperature	–55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		SN54ALS2540		SN74ALS2540		UNIT	
				SN54ALS2541		SN74ALS2541			
				MIN	TYP†	MAX	MIN	TYP†	MAX
V _{IK}		V _{CC} = 4.5 V, I _I = −18 mA		−1.2		−1.2		V	
V _{OH}		V _{CC} = 4.5 V to 5.5 V, I _{OH} = −0.4 mA		V _{CC} − 2		V _{CC} − 2		V	
V _{OL}		V _{CC} = 4.5 V, I _{OL} = 1 mA		0.15	0.5		0.15	0.5	V
		V _{CC} = 4.5 V, I _{OL} = 12 mA		0.35	0.8		0.35	0.8	
I _{OZH}		V _{CC} = 5.5 V, V _O = 2.7 V		20		20		μA	
I _{OZL}		V _{CC} = 5.5 V, V _O = 0.4 V		−20		−20		μA	
I _{OH}		V _{CC} = 4.5 V, V _O = 2 V		−15			−15		mA
I _{OL}		V _{CC} = 4.5 V, V _O = 2 V		30			30		mA
I _I		V _{CC} = 5.5 V, V _I = 7 V		0.1		0.1		mA	
I _{IH}		V _{CC} = 5.5 V, V _I = 2.7 V		20		20		μA	
I _{IL}		V _{CC} = 5.5 V, V _I = 0.4 V		−0.1		−0.1		mA	
I _{O‡}		V _{CC} = 5.5 V, V _O = 2.25 V		−15	−70		−15	−70	mA
I _{CC}	‘ALS2540	V _{CC} = 5.5 V	Outputs high	5	10		5	10	mA
			Outputs low	13	22		13	22	
			Outputs disabled	11	19		11	19	
	‘ALS2541	V _{CC} = 5.5 V	Outputs high	6	14		6	14	mA
			Outputs low	15	25		15	25	
			Outputs disabled	13.5	22		13.5	22	

† All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

‡ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS} .

SN54ALS2540, SN54ALS2541, SN74ALS2540, SN74ALS2541 **OCTAL LINE DRIVERS/MOS DRIVERS WITH 3-STATE OUTPUTS**

JUNE 1984—REVISED MAY 1986

'ALS2540 switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = 25 °C	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = MIN to MAX				UNIT
			'ALS2540	SN54ALS2540		SN74ALS2540		
			TYP	MIN	MAX	MIN	MAX	
t _{PLH}	A	Y	7.5	2	14	2	12	ns
t _{PHL}			5.6	2	13	2	11	
t _{PZH}	$\overline{G}$	Y	9	5	18	5	15	ns
t _{PZL}			12.6	8	24	8	20	
t _{PHZ}	$\overline{G}$	Y	4	1	12	1	10	ns
t _{PLZ}			7	2	14	2	12	

'ALS2541 switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = 25 °C	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = MIN to MAX				UNIT
			'ALS2541	SN54ALS2541		SN74ALS2541		
			TYP	MIN	MAX	MIN	MAX	
t _{PLH}	A	Y	8.7	2	17	2	15	ns
t _{PHL}			7	2	14	2	12	
t _{PZH}	$\overline{G}$	Y	9	5	18	5	15	ns
t _{PZL}			12.6	8	24	8	20	
t _{PHZ}	$\overline{G}$	Y	4	1	12	1	10	ns
t _{PLZ}			7	2	14	2	12	

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.