



Wiremold

Sentrex® ZoneDefender® PRO Series


ZoneDefender® PRO Series Panel Protection Devices



Wiremold® Sentrex® ZoneDefender® PRO ZPA and ZPB Series Surge Protective Devices are compact, full-featured, heavy-duty surge protective devices that will protect sensitive electronic equipment from external or internal transient activity.


All units come standard with EMI/RFI filtering, remote indication contacts and audible alarm and meet UL1449 Third Edition requirements.

The feature-rich ZoneDefender PRO Series is ideally suited for any application where high quality non-modular protection is desired.

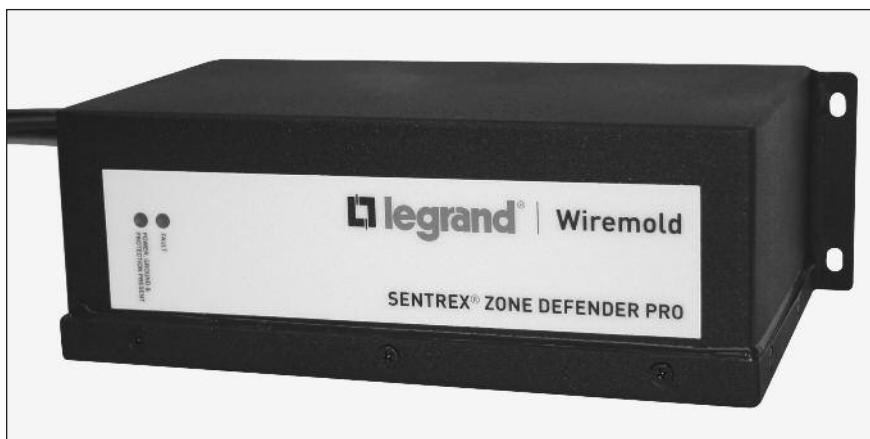

Sentrex ZoneDefender Pro Series provides surge protection at the main service panel, sub panel or at sensitive equipment.

FEATURES & BENEFITS

- **Up to 160kA maximum surge current protection per phase.**
- **Standard EMI/RFI noise filter.** Noise attenuation –75dB maximum 100 kHz to 100 MHz.
- **Easy installation.** Enclosure can be easily drilled or punched for conduit/cable access and positioned to the electrical panel at the discretion of the installer.
- **Standard Remote diagnostic connection.** Using NO/NC dry contacts via on-board relay. Remote monitoring device sold separately.
- **Type 2 Surge Protective Device (SPD).** Nominal discharge current rating of 10kA.
- **Built-in audible alarm.**
- **All-mode protection is standard on all units.**
- **Short circuit rating 200k AIC.**
- **NEMA 1, 2, 12, 13 rated, metal enclosure.**
- **Short circuit and thermal fusing.**
- **Visual indication of protection status.**
- **Ten-year product warranty.**
- **UL1449 Third Edition Listed.**
- 

Product Selection Guide

ZPB Series – 160kA

CATALOG NUMBER	ELECTRICAL SERVICE	UL1449 CLAMPING LEVEL (VPR)**				MAXIMUM CONTINUOUS OPERATING VOLTAGE (MCOV)			
		L-N	L-L	N-G	L-G	L-N	L-L	N-G	L-G
ZPB120T	120/240V, Single Ø	600V	900V	500V	500V	130V	260V	130V	130V
ZPB120Y	120/208V, 3Ø Wye	600V	900V	500V	500V	130V	260V	130V	130V
ZPB277Y	277/480V, 3Ø Wye	1000V	1800V	1000V	1000V	320V	640V	320V	320V
ZPB240DCT	120/240/120V, Hi-Leg Delta	1000V*	900V	500V	500V	320V*	260V	130V	130V

* Hi L-N

** Voltage Protection Rating


ZPA Series – 80kA

CATALOG NUMBER	ELECTRICAL SERVICE	UL1449 CLAMPING LEVEL (VPR)**				MAXIMUM CONTINUOUS OPERATING VOLTAGE (MCOV)			
		L-N	L-L	N-G	L-G	L-N	L-L	N-G	L-G
ZPA120T	120/240V, Single Ø	600V	900V	500V	500V	130V	260V	130V	130V
ZPA120Y	120/208V, 3Ø Wye	600V	900V	500V	500V	130V	260V	130V	130V
ZPA277Y	277/480V, 3Ø Wye	1000V	1800V	1000V	1000V	320V	640V	320V	320V
ZPA240DCT	120/240/120V, Hi-Leg Delta	1000V*	900V	500V	500V	320V*	260V	130V	130V

* Hi L-N

** Voltage Protection Rating

Accessories

Product	Description/Specifications
ZHRMU 	<p>Remote Monitoring Unit – Offers clear audio/visual indication of the status of the surge suppressor unit. The RMU can be installed adjacent to the suppressor or as a remote installation. Can also be used as a standalone diagnostic device using NO/NC dry contacts. Powered by 2 AA alkaline batteries (included) which will power the unit for approximately 2 years. Unit connects with Cat5 cable (not included).</p> <p>SPECIFICATIONS</p> <p>Dimensions: 5.4" x 2.6" x 1.3" [13.7mm x 6.6mm x 3.3mm]</p> <p>Weight: Approx. 0.35lb [0.16kg] including batteries.</p> <p>Protection Indication: Bright green LED: Illuminated, flashing</p> <p>Fault Indication: Audible alarm. Bright red LED: Illuminated</p> <p>Test Functions: Switch tests audible alarm (checks monitoring circuitry)</p> <p>Silent Function: Switch silences audible alarm</p> <p>Connections: Accepts wires up to #14 AWG (Cat5 recommended)</p>

Product Specifications

MECHANICAL SPECIFICATIONS:

Enclosure:	Durable, painted steel. Approved for indoor use. NEMA 1, 2, 12 and 13 rated.
Dimensions:	9 1/4" x 4 7/8" x 3" (235mm x 124mm x 76mm).
Weight:	ZPB Series: 7.9 lbs. (3.6 kg), ZPA Series: 5.3 lbs. (2.4 kg).
Operating Environment:	-40°C to 85°C, 95% relative humidity (non-condensing).
Construction:	Low impedance circuitry. Single board system to minimize transient impedance and suppression voltage.
Terminal Loads:	ZPB Series: #8 AWG, ZPA Series: #10 AWG, 22 AWG for remote contacts.
Mounting:	Built-in mounting holes, 3/16" [4.8mm] diameter.

ELECTRICAL SPECIFICATIONS:

Maximum Surge Current Capacity Per Phase:	ZPB Series: 160,000A ZPA Series: 80,000A
Maximum Surge Current Capacity Per Mode:	ZPB Series: L-G 80,000A (8/20μs), L-N 80,000A (8/20μs), L-L 80,000A (8/20μs), N-G 80,000A (8/20μs) ZPA Series: L-G 40,000A (8/20μs), L-N 40,000A (8/20μs), L-L 40,000A (8/20μs), N-G 40,000A (8/20μs)
Duty Cycle Performance (Surge Life):	ZPB Series: 200 pulses at 10,000A ZPA Series: 100 pulses at 10,000A
Nominal Discharge Current (I_n):	All Models: 10kA
Remote Indication Contacts:	NO/NC dry contacts via on-board relay, 125VAC, 3A rated
EMI/RFI Noise Attenuation:	-75dB Maximum 100 kHz to 100 MHz
Diagnostics:	Green LED indicates protection present
Protection Technology:	MOV based, backed by thermal and short circuit fusing
Installation:	Unit should be connected through a dedicated 30 amp circuit breaker with the appropriate poles (customer supplied).

Questions? Call Technical Support at 1-800-SENTREX



Wiremold

WIREMOLD

U.S. and International:

60 Woodlawn Street • West Hartford, CT 06110

1-800-621-0049 • FAX 860-232-2062 • Outside U.S. 860-233-6251

Canada:

570 Applewood Crescent • Vaughan, Ontario L4K 4B4

1-800-723-5175 • FAX 905-738-9721



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Wiremold:

[ZM120LG](#) [ZM120LN](#) [ZM277LG](#) [ZM277LN](#) [ZMNG](#) [ZS120](#) [ZS277](#) [ZSA120TNG](#) [ZSA120YNG](#) [ZSBNG](#) [ZHRMU](#)
[ZHRMU250](#)