



PWR1726AC

1.5 Watt Unregulated DC/DC Converter



To Be Discontinued*

FEATURES

- 8000v Isolation Test Voltage
- No External Parts Required
- Remote On/Off
- Low-Barrier Capacitance
- RoHS Compliant
- Synchronizable

APPLICATIONS

- Biomedical Data Acquisition
- Industrial Process Equipment
- Data Acquisition
- Test Equipment
- Portable Equipment

DESCRIPTION

The PWR1726AC is a single-channel, bipolar output DC/DC converter designed for those applications where high-isolation voltage and low-barrier capacitance are critical for system reliability and integrity.

Calculated mean-time-to-failure (MTTF) is in excess of 100 years at an ambient temperature of +25°C and at rated output power. The performance of the PWR1726AC is not derated over its entire specified temperature range of -25°C to +85°C.

Synchronization of the PWR1726AC may be accomplished simply by connecting the Sync-In pin of one unit to the Sync-In pin of another unit. Up to 8 converters may be synchronized in this manner.

The PWR1726AC provides a plus and minus output voltage that is approximately equal to the magnitude of the input voltage. The unit operates over an input voltage range of 7VDC to 16VDC.

Each PWR1726AC isolation barrier is tested per the method set forth by UL544, VDE750, and CSA C22.2.



For full details go to
www.murata-ps.com/rohs



COMMON SPECIFICATIONS


Specifications typical at $T_A = +25^\circ\text{C}$, $V_{IN} = 15\text{VDC}$, $I_{LOAD} = \pm 50\text{mA}$ and in free-running mode unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT					
Rated Voltage			12		Vdc
Voltage Range			30		Vdc
Input Current	$I_{LOAD} = 0$ $I_{LOAD} = \text{Rated Load}$ Short Circuit $I_{LOAD} = \text{Rated Load}$	7	145 115 15	16 165	mA mA mA mA
Ripple Current					mA p-p
ISOLATION					
Voltage Rated Continuous					
AC, 60Hz		3500			Vrms
DC		5000			Vdc
Test Voltage	60sec, 60Hz	8000			Vpk
Resistance			10		$\text{G}\Omega$
Capacitance			10		pF
Leakage Current	$V_{ISO} = 240\text{VAC}, 60\text{Hz}$		1	2	μA
OUTPUT					
Rated Voltage	$I_{LOAD} = \text{Rated Load}$				Vdc
Voltage Range	$I_{LOAD} = \text{Rated Load}$ $I_{LOAD} = 0\text{mA}$	± 14.25	± 15	± 15.75	Vdc
Rated Current	$I_{LOAD} = 0\text{mA}$	± 16.0	± 16.5	± 18.0	Vdc
Current Range	Balanced Loads	0	± 50		mA
Line Regulation	Balanced Loads			± 90	mA
Load Regulation	Single Ended	0		180	mA
Ripple Voltage	7VDC < $V_{IN} < 18\text{VDC}$ No Load < $I_{OUT} < \pm 50\text{mA}$ BW = DC to 10MHz		1.16	0.3	mV/mV %/mA
	$I_{LOAD} = 0$ $I_{LOAD} = \text{Rated Load}$		15 50		mV p-p mV p-p
					(referenced to common)
GENERAL					
MTTF	Calculated per MIL - HDBK - 217 Rev. E				
Switching Frequency	Ground, Benign 25°C		1.2 120		MHz kHz
TEMPERATURE					
Specification		-25		+85	$^\circ\text{C}$
Operation		-40		+100	$^\circ\text{C}$
Storage		-55		+110	$^\circ\text{C}$


NOTE: Other input and output voltages may be available upon request. Please consult the factory.

MECHANICAL

TOP VIEW

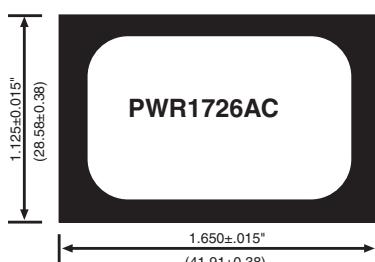

SIDE VIEW

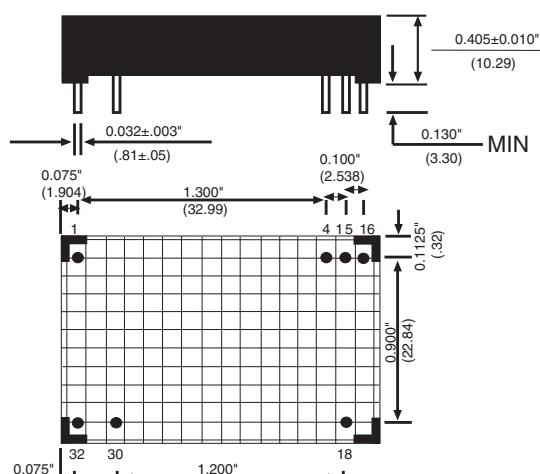

NOTES:

All dimensions are in inches (millimeters).

GRID: 0.100 inches (2.54 milimeters)

PIN PLACEMENT TOLERANCE: $\pm 0.015"$

To ensure proper operation, the remote on/off pin should be connected to $+V_{IN}$ when the unit is on.

MATERIAL: Units are encapsulated in a low thermal resistance molding compound which has excellent chemical resistance, wide operating temperature range, and good electrical properties under high humidity environments. The encapsulant and outer shell of the unit have UL94V-0 ratings. Lead material is brass; lead finish is matte Sn (100 microinches minimum) over Ni (40-80 microinches)

PIN CONNECTIONS


1	-Vout
14	-Vin
15	Sync-In
16	+Vin
18	REMOTE ON/OFF
30	COMMON
32	+Vout

BOTTOM VIEW

ABSOLUTE MAXIMUM RATINGS

Input Voltage 16Vdc
 Output Short-Circuit Duration Continuous
 Internal Power Dissipation 2W
 Lead Temperature (soldering, 10 seconds max) +300°C


ORDERING INFORMATION

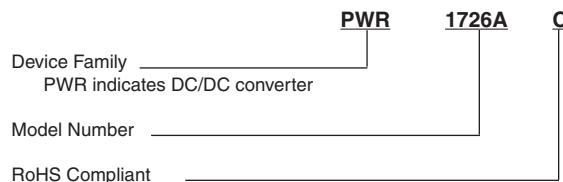


TYPICAL PERFORMANCE CURVES

TA=+25°C, Rated Input Voltage, Rated Output Current unless otherwise noted

OUTPUT VOLTAGE VS. OUTPUT CURRENT

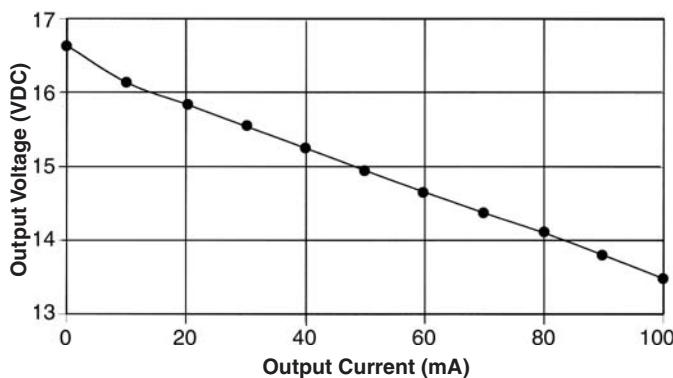

OUTPUT VOLTAGE VS. INPUT VOLTAGE

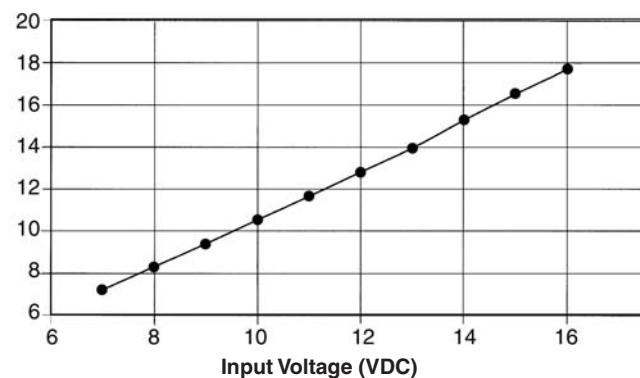

THROUGH-HOLE SOLDERING INFORMATION

These devices are intended for wave soldering or manual soldering.
They are not intended to be subject to surface mount processes under any circumstances.

The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed 175°C. Care should be taken to control manual soldering limits identical to that of wave soldering.

SYNCHRONIZATION INFORMATION

The unit may be synchronized to an external clock. Recommended frequency is a minimum of 110kHz and a maximum of 250kHz. The sync signal must be a square wave pulse with a peak of 7.5V min to 12V max, the amplitude being referenced to -Vin.

