





3-DIMENSIONAL MODEL
SCALE 2:1

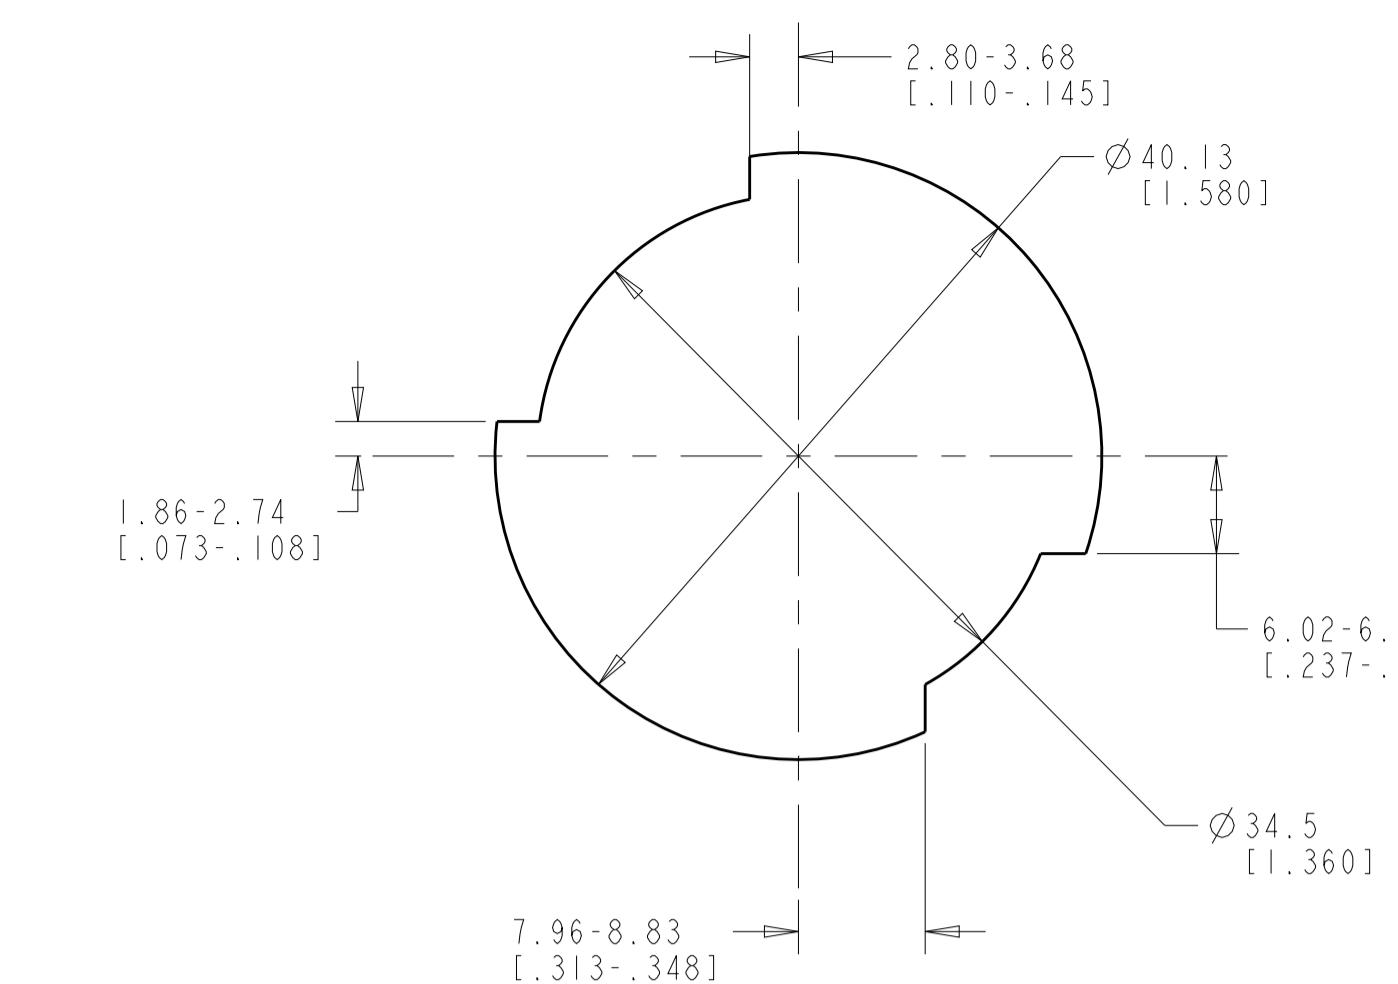

RECOMMENDED CUT OUT
SCALE 2:1

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [.030 - .090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

5. UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN

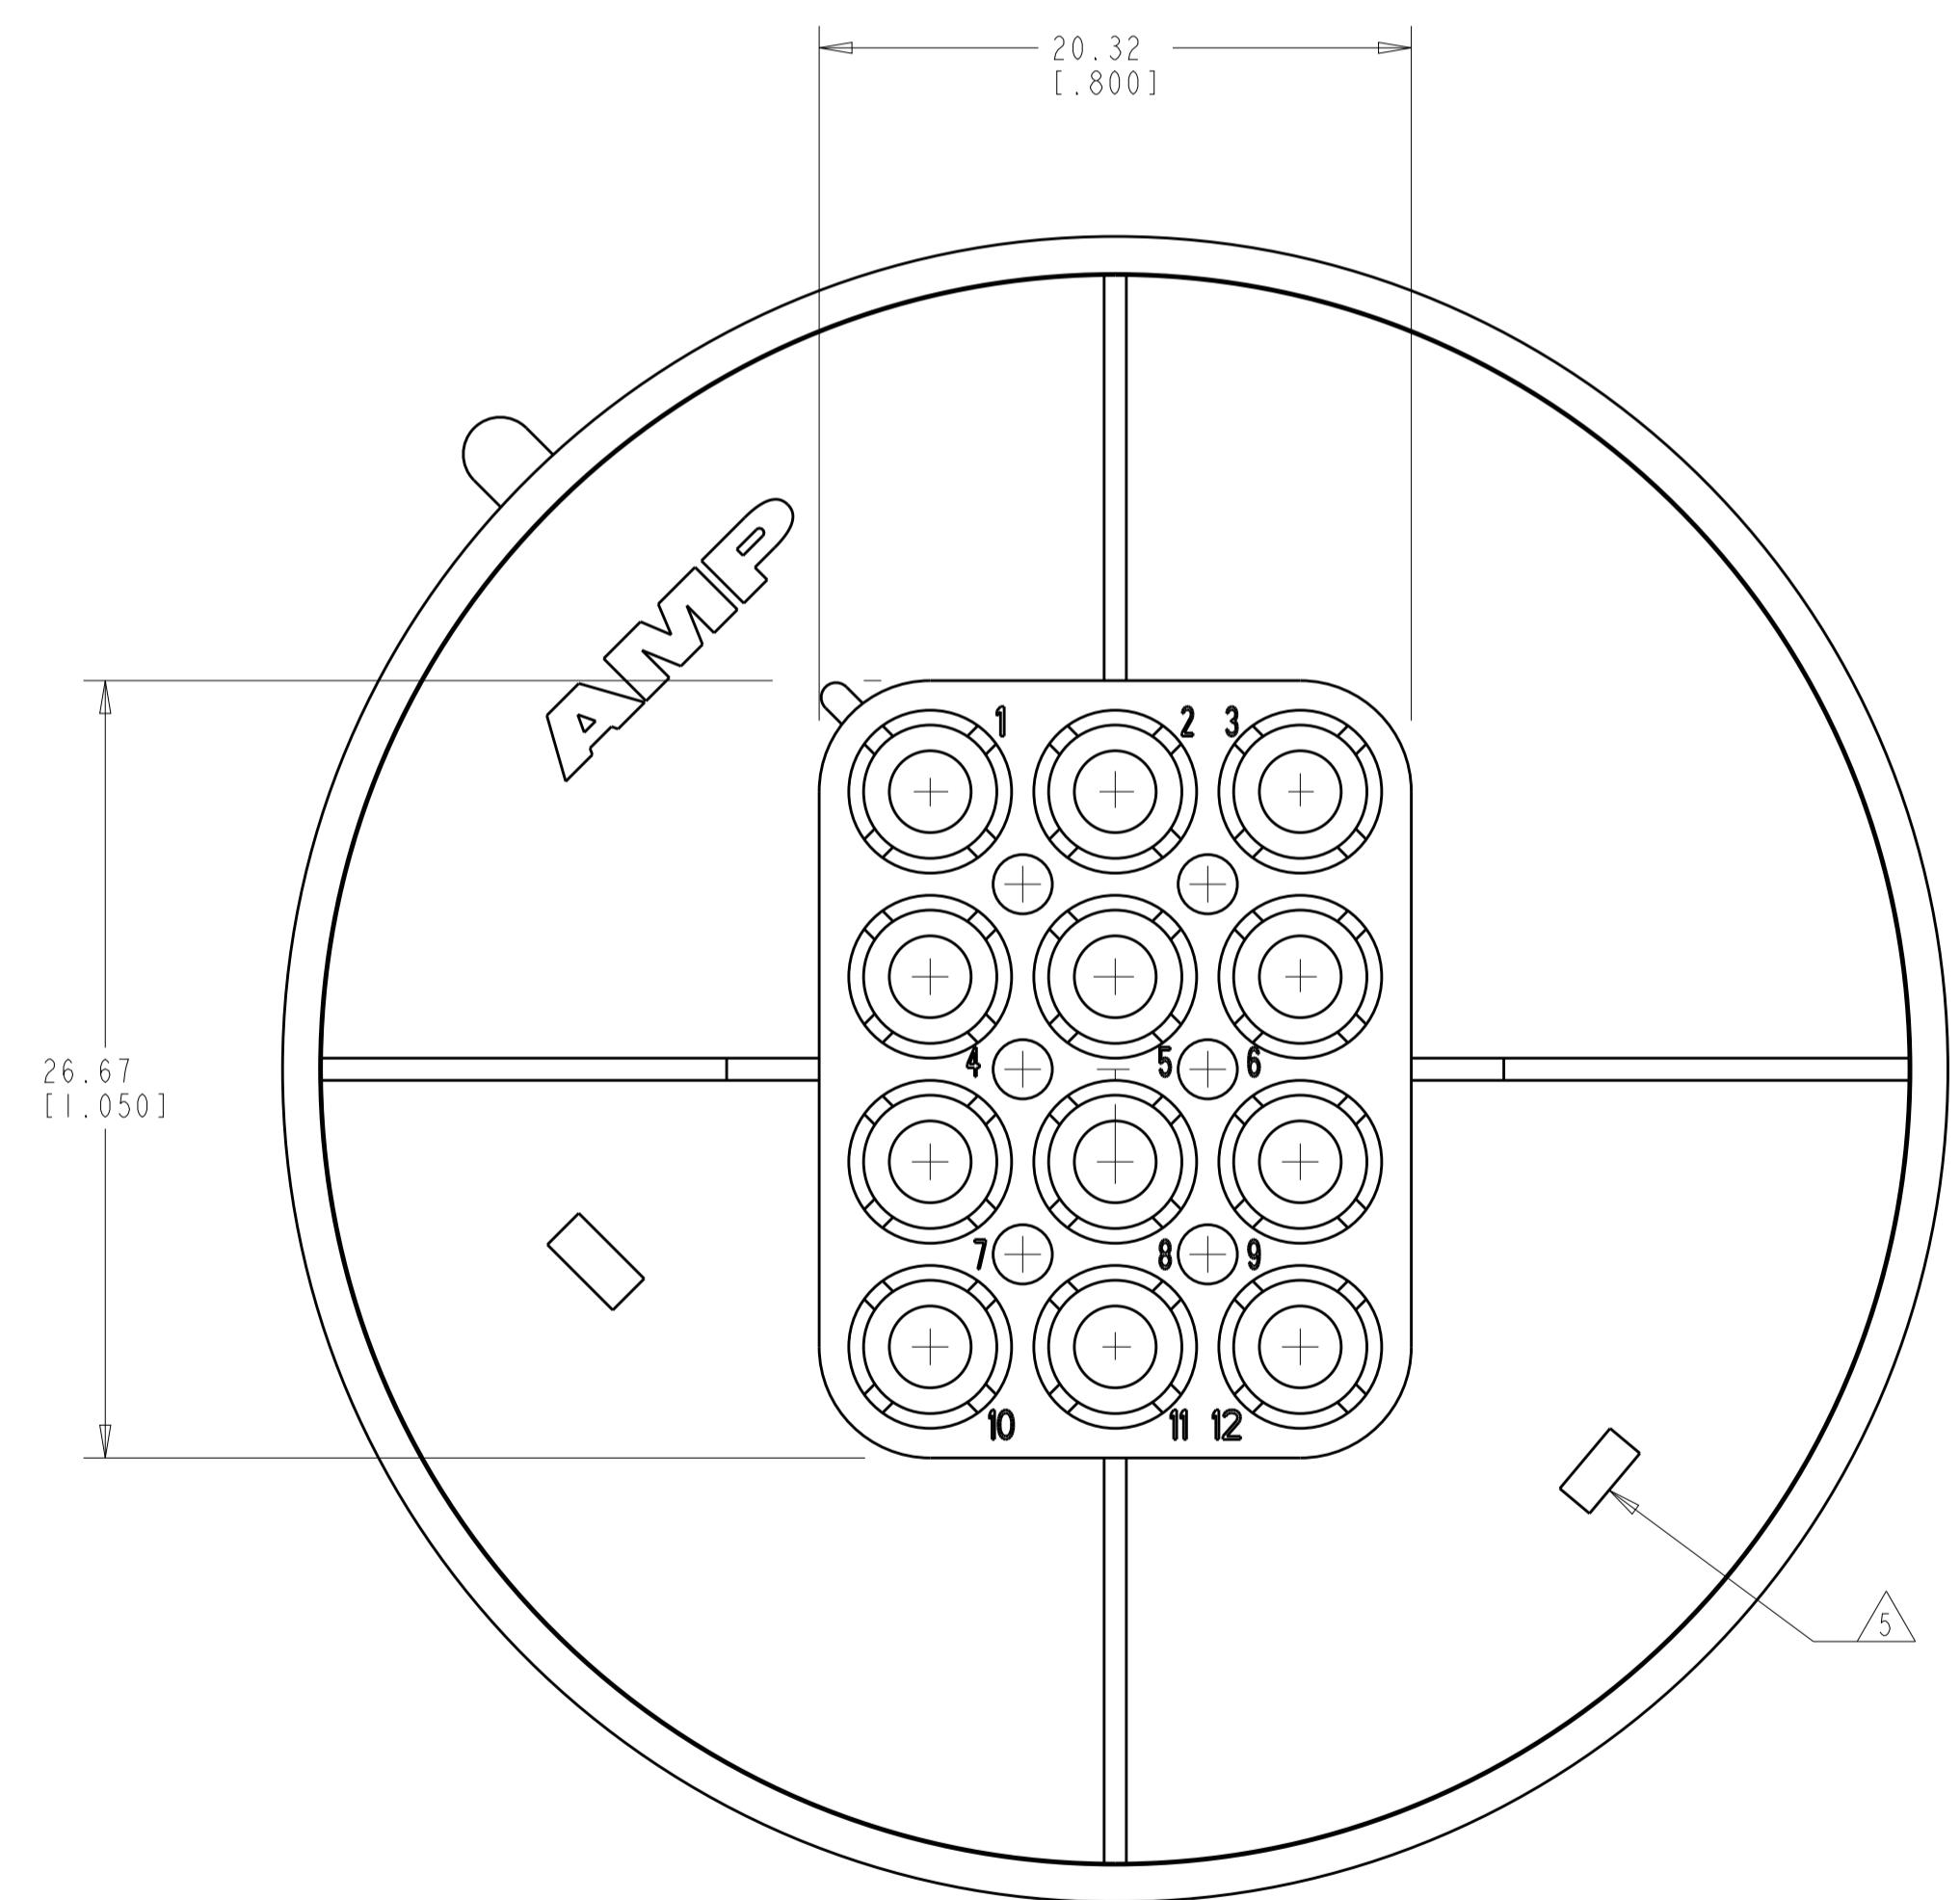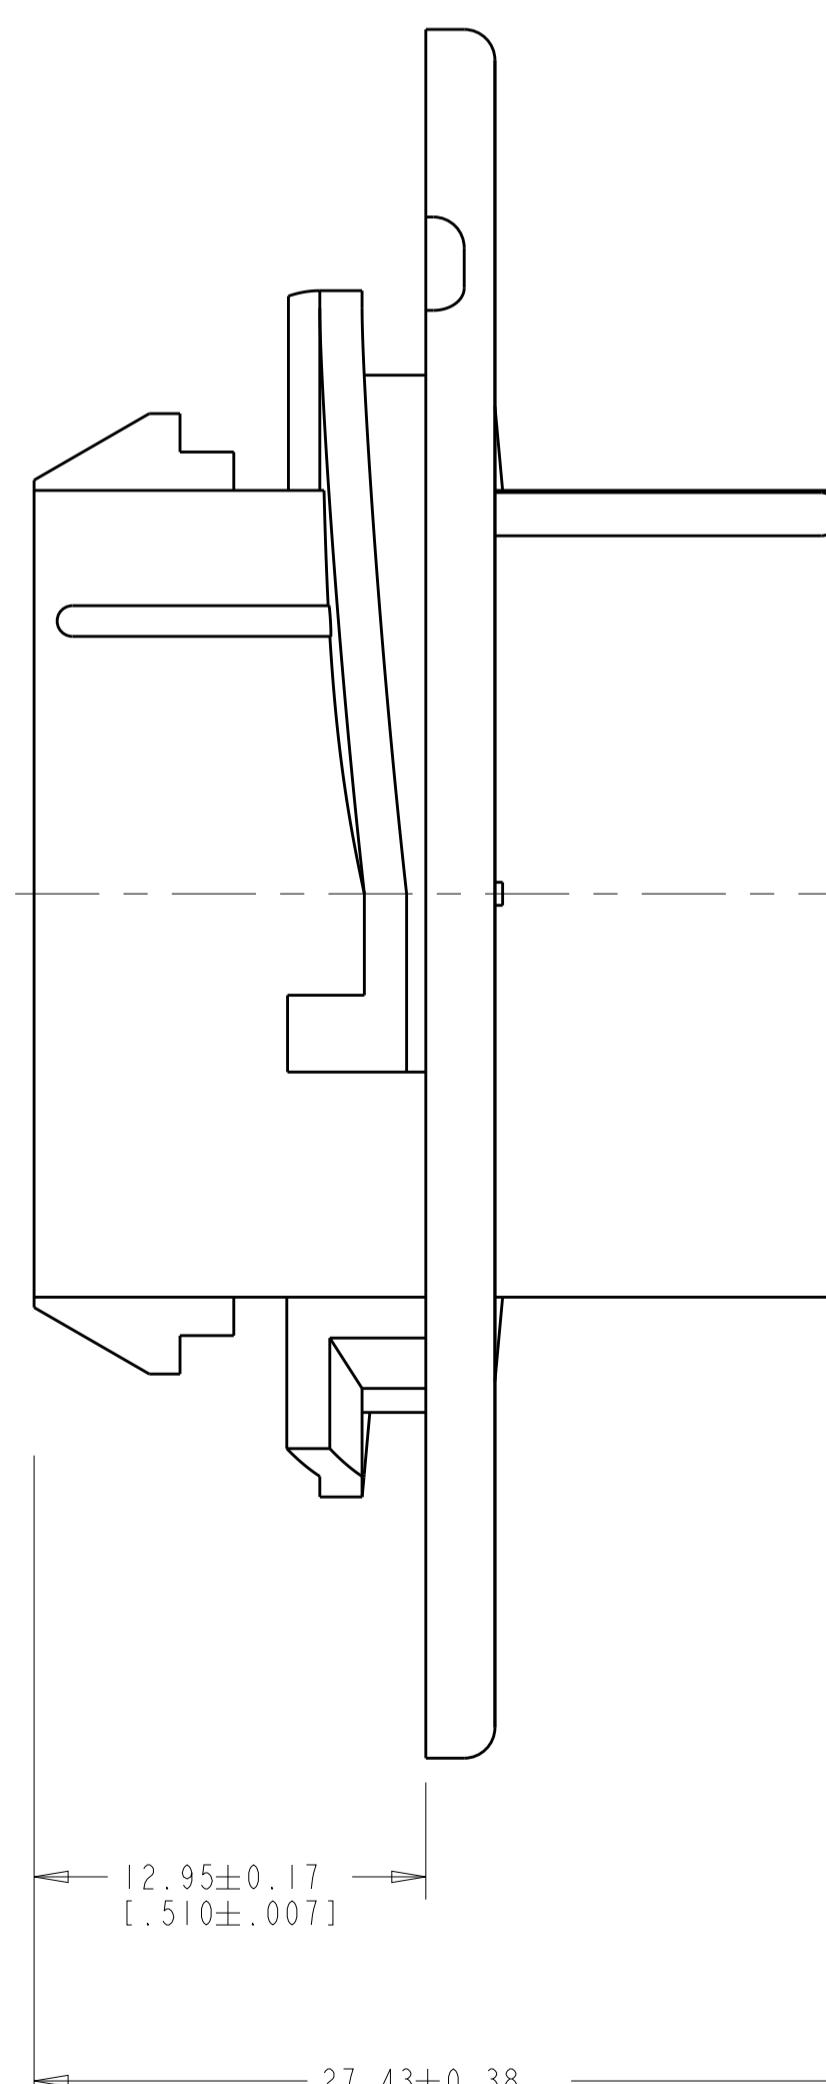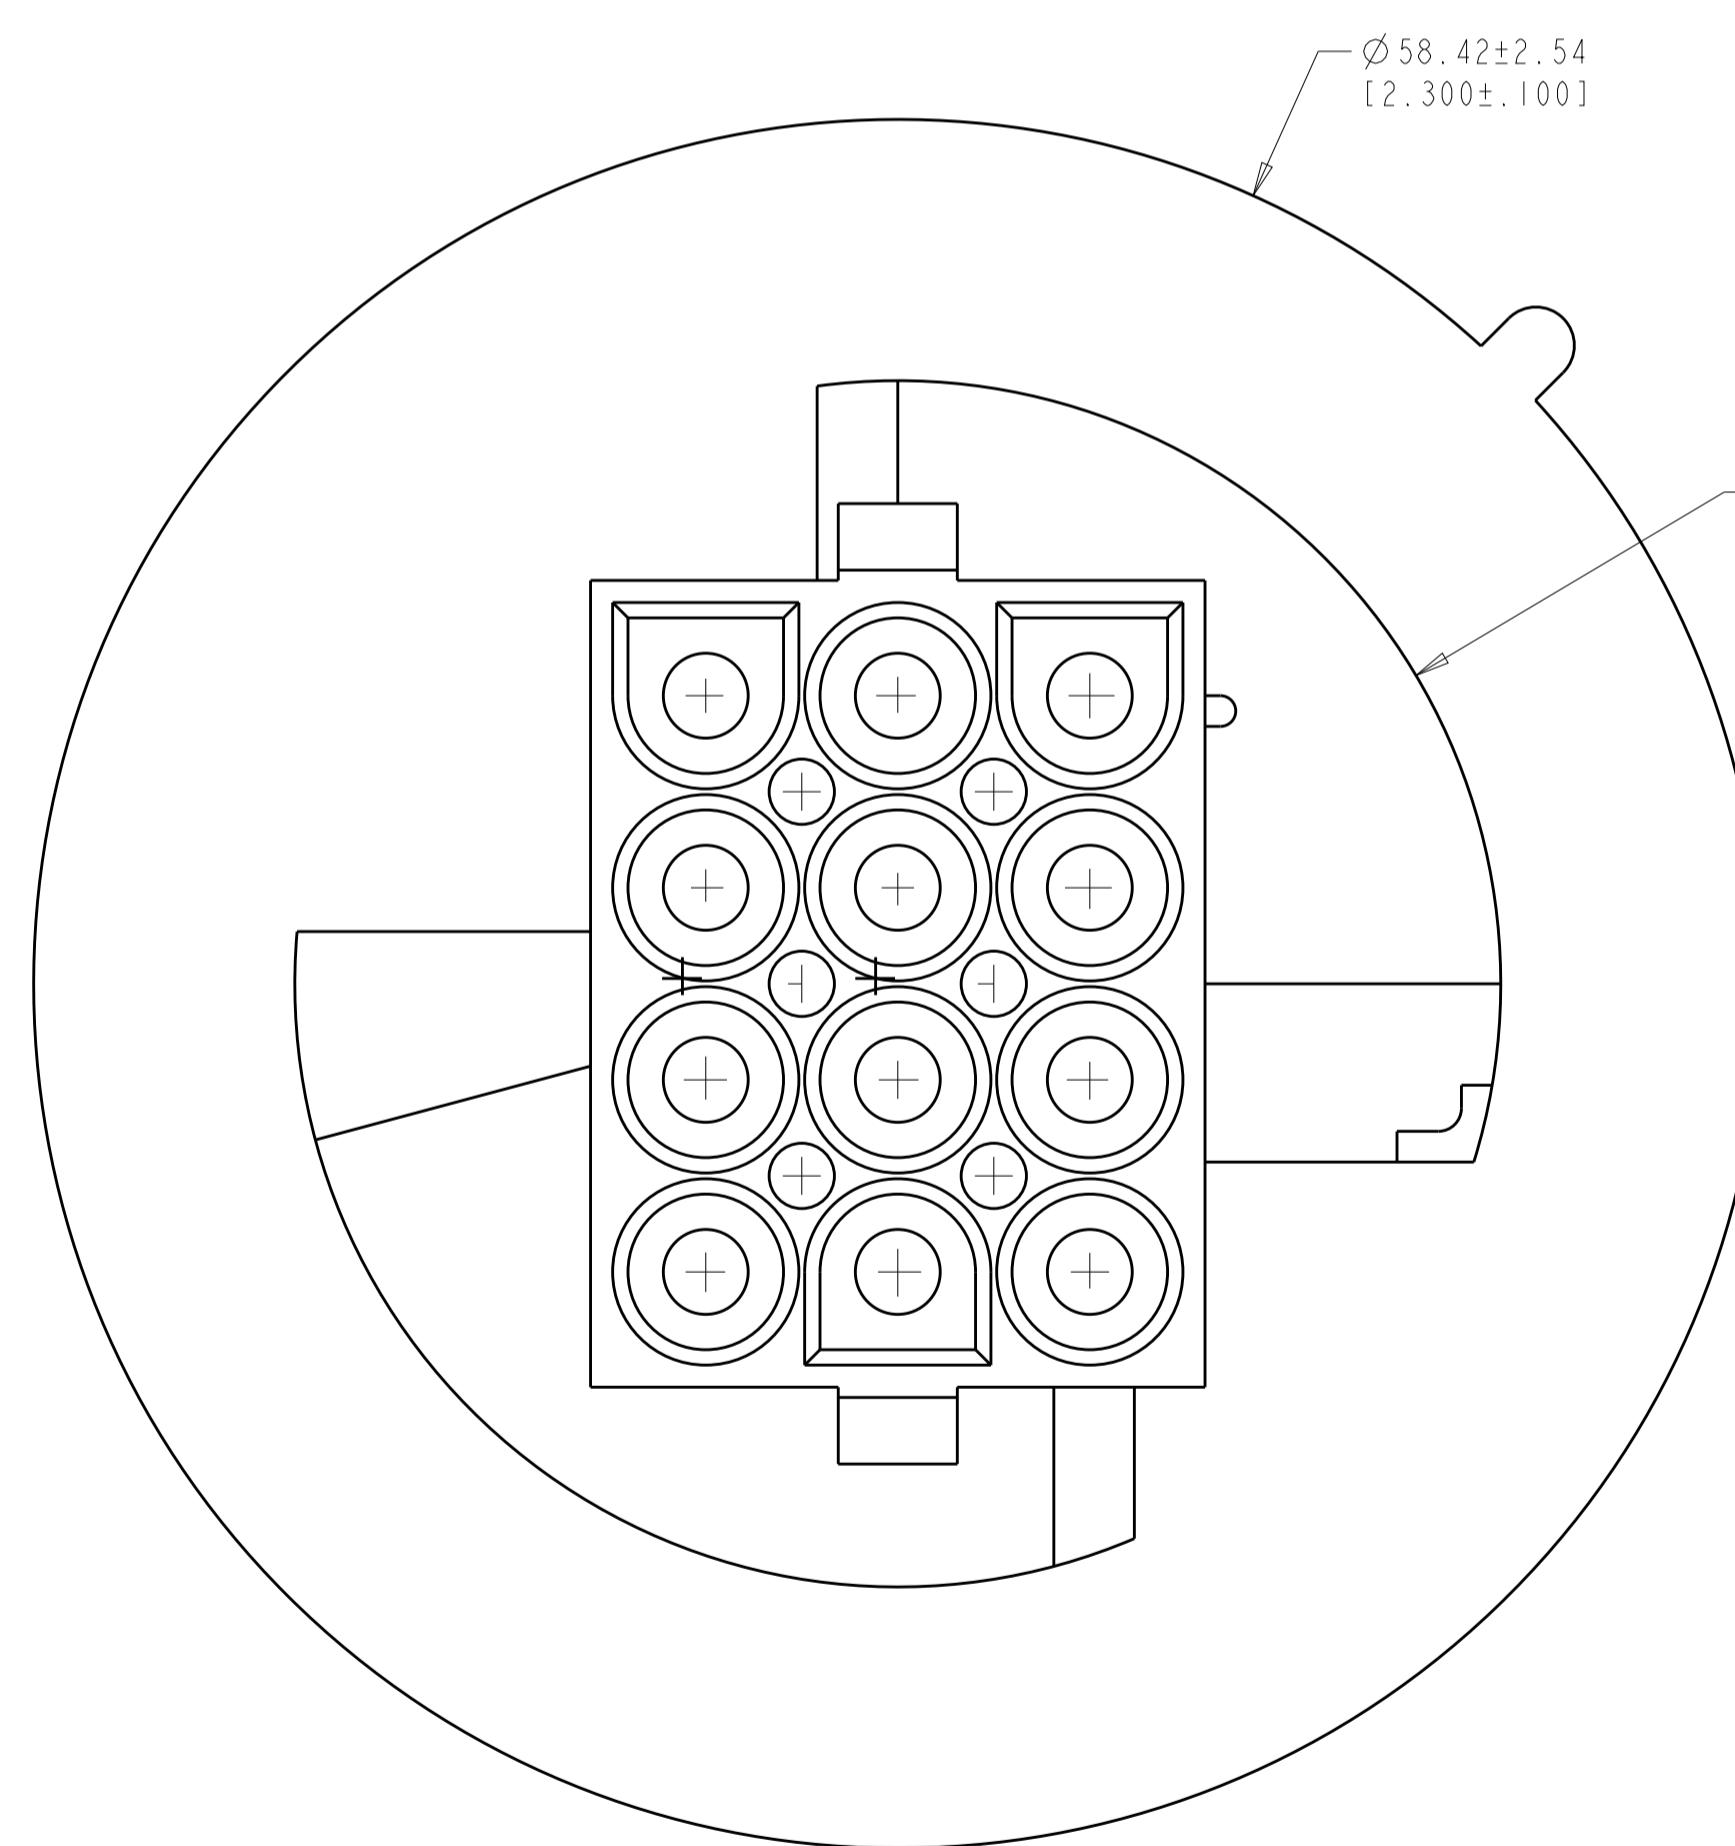

SUPERSEDED BY	794716-2	BLACK	I-794716-9
		GRAY	I-794716-8
		BLUE	I-794716-6
		GREEN	I-794716-5
		YELLOW	I-794716-4
		ORANGE	I-794716-3
		RED	I-794716-2
		BROWN	I-794716-1
PRELIMINARY	794716-3	RED	794716-3
		BLACK	794716-2
		NATURAL	794716-1
		COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.	08-OCT-1999	08-OCT-1999	TE Connectivity
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. TRULL	CAP, 12 CIRCUIT, UNIVERSAL MATE-N-LOK™, SPECIAL
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC	± ± ± ± ±	08-OCT-1999 PRODUCT SPEC APPLICATION SPEC	SIZE CAGE CODE DRAWING NO. A1 00779 C=794716
MATERIAL: NYLON UL 94V-2	FINISH: -	APVD M. TRULL	RESTRICTED TO -
			CUSTOMER DRAWING