


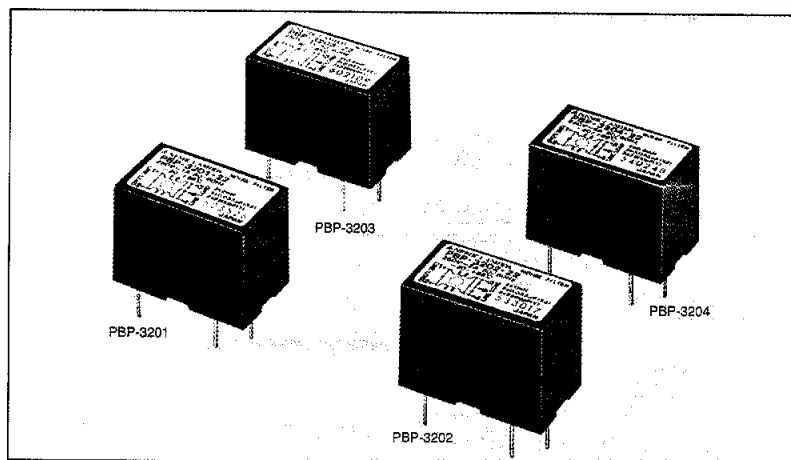

Features

- (1) For equipment designed to conform EMI regulations such as VCCI, CISPR, FCC, VDE, etc.
- (2) Attenuates conductive emission from power supply
- (3) Leakage Current: 0.75mA max. (250V, 60Hz)
- (4) Compact size
- (5) Low price

Safety standard


- UL1283,
- CSA Std. C22. 2 No. 8

Specifications




Item	Model	PBP-3201-22	PBP-3202-22	PBP-3203-22	PBP-3204-22
1 Rated voltage (AC, DC)		250V			
2 Rated current (AC, DC)	(Note)	1A	2A	3A	4A
3 Test voltage (terminal to case, AC 1 minute)		1500V			
4 Isolation resistance (terminal to case, 500VDC)		100MΩ min			
5 Leakage current	125V, 60Hz	0.35mA max.			
	250V, 60Hz	0.75mA max.			
6 DC resistance		0.5Ω max.	0.2Ω max.	0.1Ω max.	0.06Ω max.
7 Temperature rise		30°C max.			
8 Operating temperature range		-20 ~ +85°C			
9 Weight (typ)		15g			

(Note) : Value at Ta ≤ 55°C. Refer to the derating curve shown below at Ta > 55°C.


Circuit

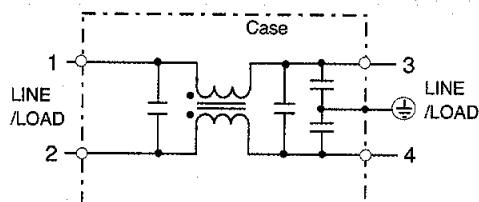

Outline drawing

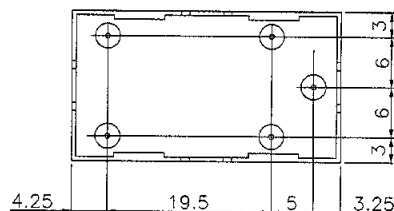

Derating

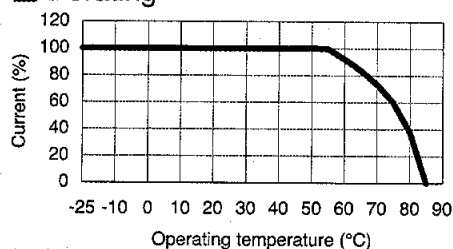

- Request customer specification for further details of specifications, outline, characteristics, etc. Read the instruction manual before usage.
- Contact us about delivery before ordering.


Case: Plastic(UL94V-0)

Unit: mm


CHARACTERISTICS

■ Typical Insertion Loss Symmetrical
 - - - - - Asymmetrical


PBP-3201-22

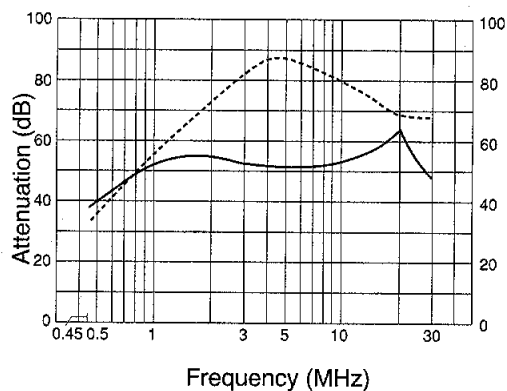

PBP-3202-22

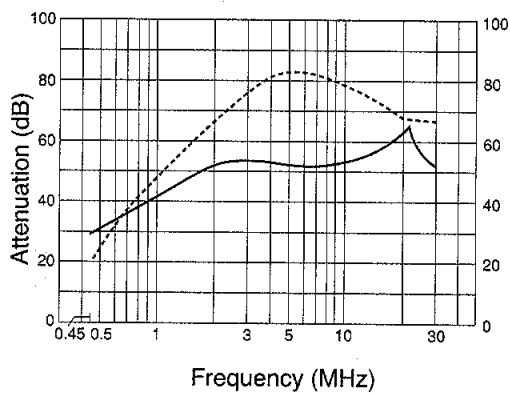

PBP-3203-22

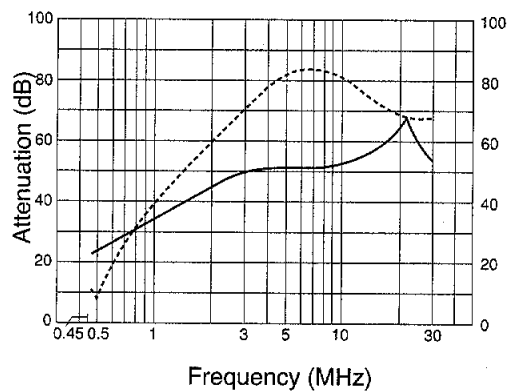

PBP-3204-22

