

54/74 FAMILIES OF COMPATIBLE TTL CIRCUITS


PIN ASSIGNMENTS (TOP VIEWS)

PROGRAMMABLE READ-ONLY MEMORIES

256 8-BIT WORDS

470 OPEN-COLLECTOR OUTPUTS

471 3-STATE OUTPUTS

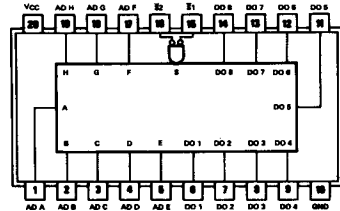


~~SN74S470 (U)~~ **SN74S470 (U, N)**
(Redesignated TBP18SA22)
~~SN74S471 (U)~~ **SN74S471 (U, N)**
(Redesignated TBP18S22)

See Bipolar Microcomputer Components Data Book, second edition.

PROGRAMMABLE READ-ONLY MEMORIES

472 3-STATE OUTPUTS

473 OPEN-COLLECTOR OUTPUTS

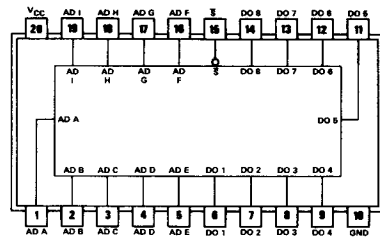


~~SN74S472 (U)~~ **SN74S472 (U, N)**
(Redesignated TBP18S42)
~~SN74S473 (U)~~ **SN74S473 (U, N)**
(Redesignated TBP18SA42)

See Bipolar Microcomputer Components Data Book, second edition.

PROGRAMMABLE READ-ONLY MEMORIES

474 3-STATE OUTPUTS

475 OPEN-COLLECTOR OUTPUTS

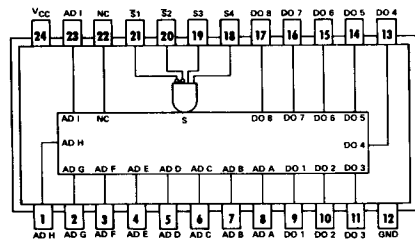

~~SN74S474 (U)~~ **SN74S474 (U, N)**
(Redesignated TBP18S46)
~~SN74S475 (U)~~ **SN74S475 (U, N)**
(Redesignated TBP18SA46)
NC — No internal connection

See Bipolar Microcomputer Components Data Book, second edition.

5