

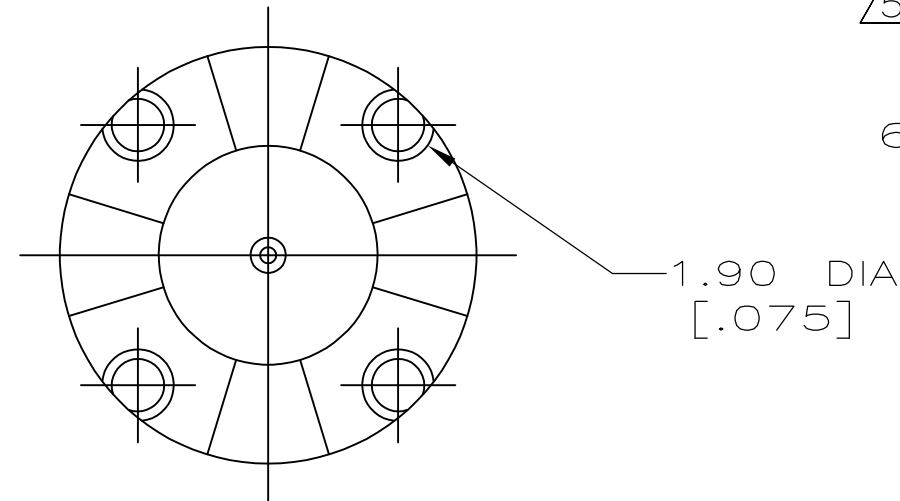


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AJ	16		P	REVISED PER ECO-11-005030	11MAR11	RK

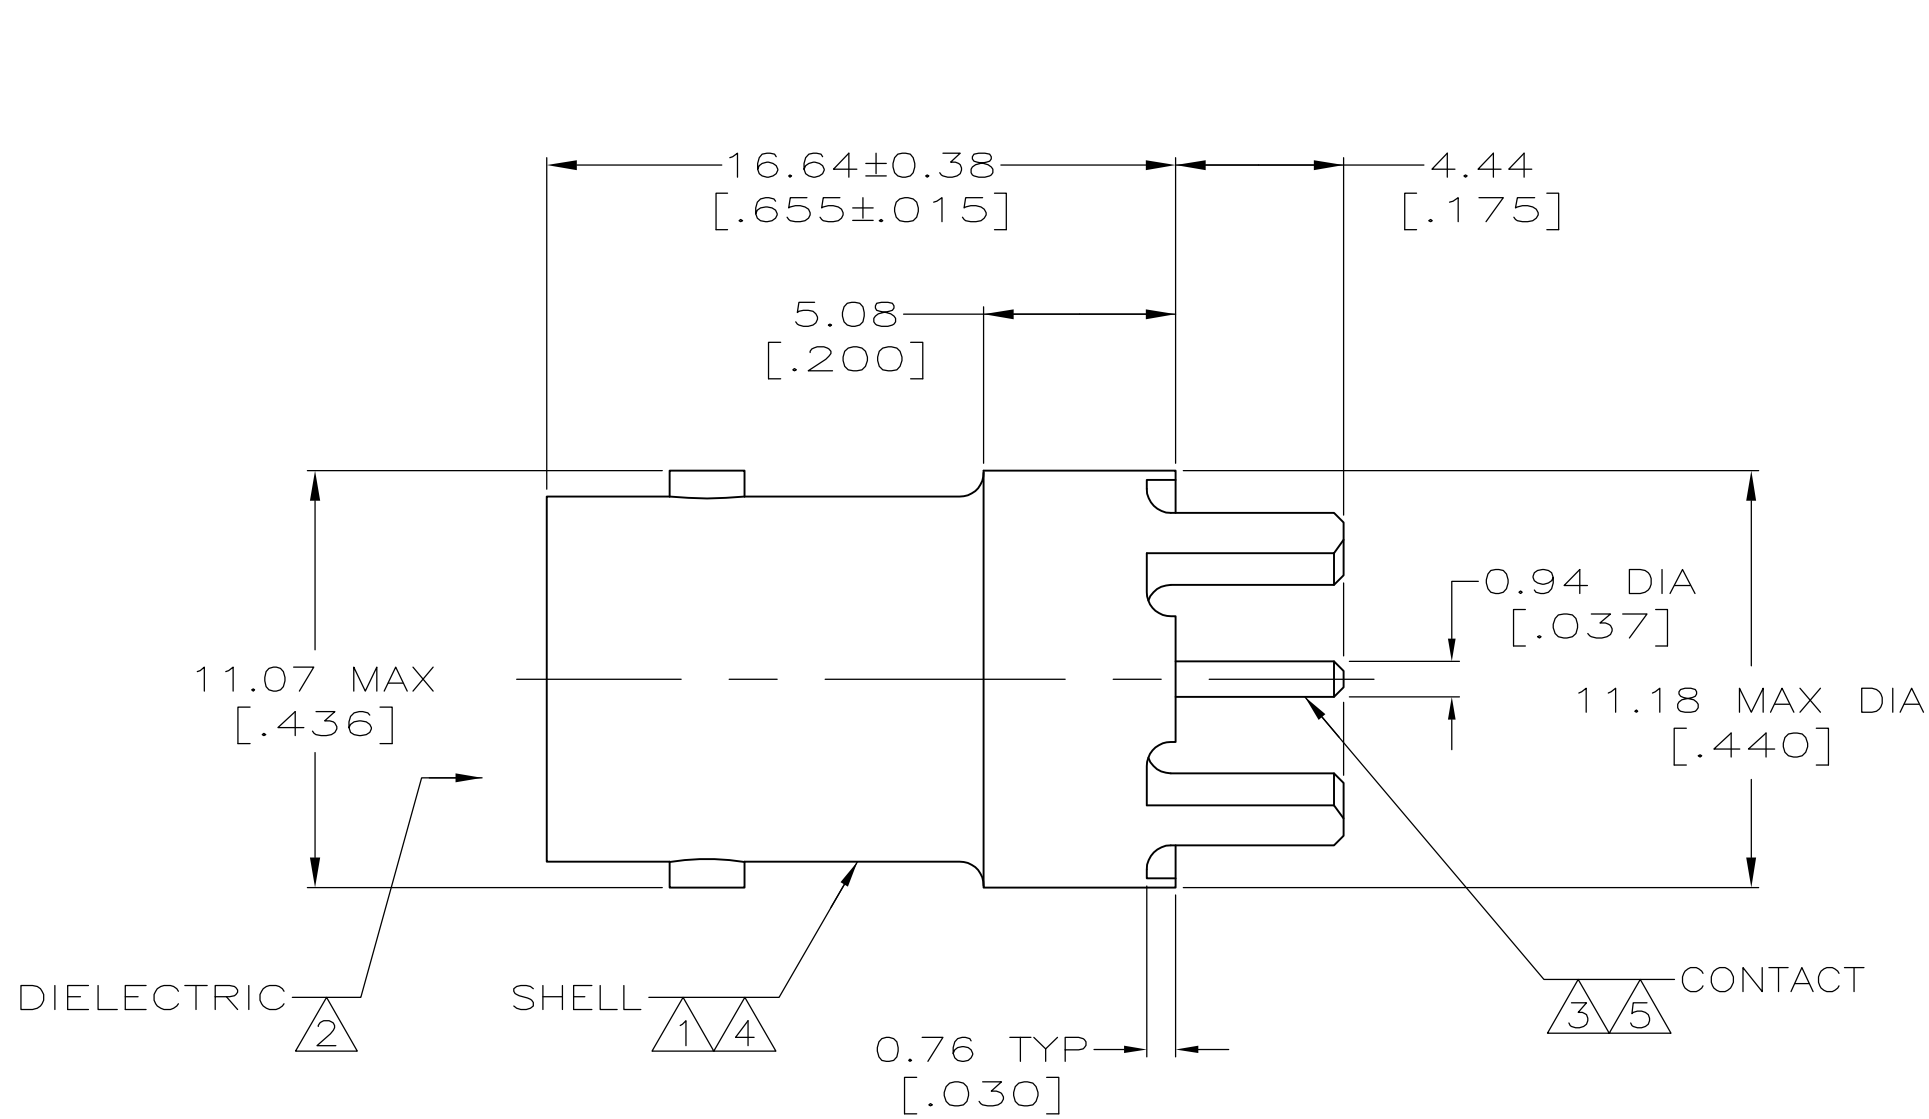

- 1 ZINC PER QQ-Z-363.
- 2 PTFE PER MIL-P-19468.
- 3 PHOSPHOR BRONZE PER QQ-B-750.
- 4 TIN PLATE PER ASTM-B-545, 3.04 μm [.000120] MINIMUM THICK.
- 5 GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
- 6. SEE INSTRUCTION SHEET 408-9889.

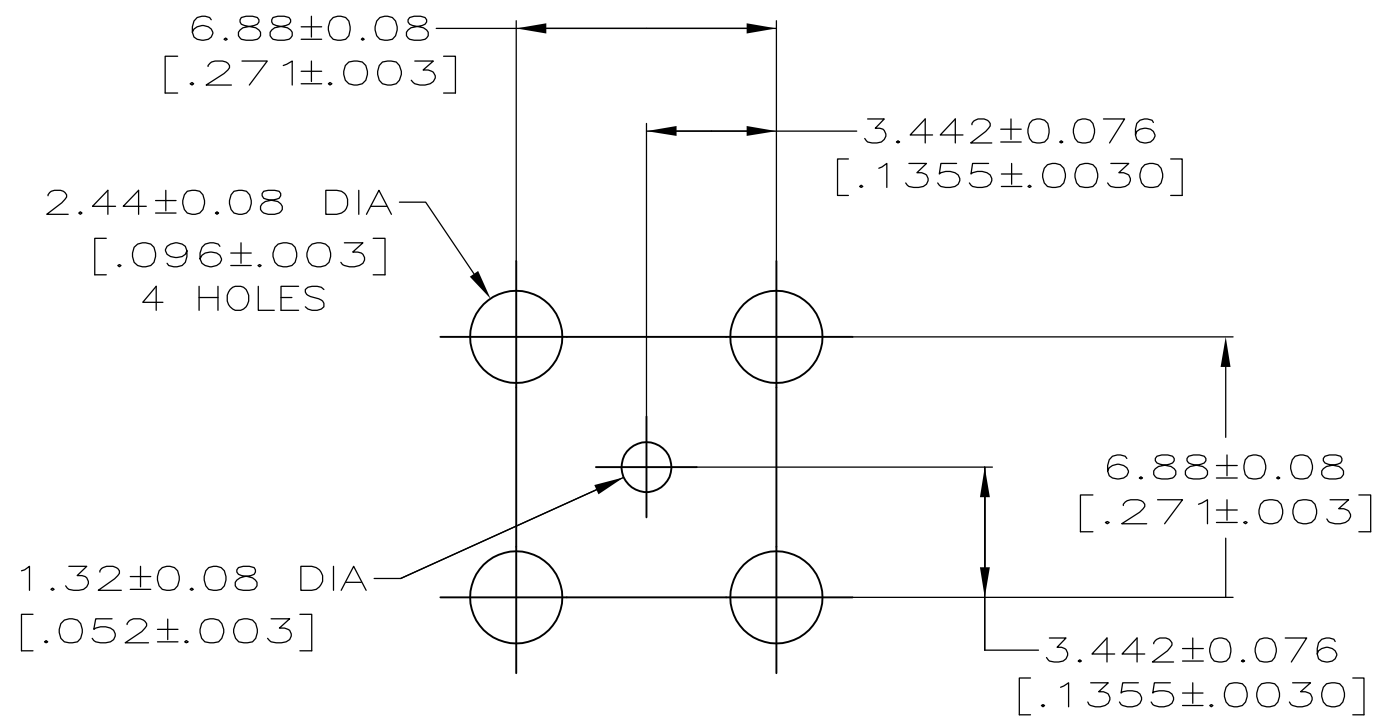

SUGGESTED PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. ATTADIA - 01FEB2005	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK J. HAVENER - 01FEB2005				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME J. LIPPERT			
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC			
	FINISH		APPLICATION SPEC			
MATERIAL SEE NOTES 1 - 3		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=5414394	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 of 1	REV P	