

Thru-Hole Mount 1553 Single Transformer

Ruggedized

PulseR
Ruggedized Solutions



R Single Transformer package

R MIL-STD-1553 Applications

R Low profile – 0.172" Height

Storage Temperature: -55°C to +130°C

R Weight: ≤3.0 grams

R Moisture Sensitivity Level: 1

Electrical Specifications @ 25°C — Operating Temperature -55°C to +130°C



Part Number	Terminals	Ratio (±3%)	DC Resistance (Ω Max)	Impedance (Ω Min)	Droop	Overshoot	CMR	Frequency Range (No Load)	IR @ 250Vdc (Min)	DWV
X-1584	1-5:6-2	1CT:1.79CT	(1-5) 0.9 (6-2) 2.5	(6-2) 3,000	20% max	± 1V max	45dB min	75kHz to 1MHz	10K MΩ	100 Vrms
X-1596	1-5:6-2	1CT:2.5CT	(1-5) 0.9 (6-2) 2.5	(6-2) 3,000	20% max	± 1V max	45dB min	75kHz to 1MHz	10K MΩ	100 Vrms

Note: Add suffix NL to part to designate tin plating for RoHS compliance (X-1584NL)

Mechanical

Schematic


X-1584/X-1596

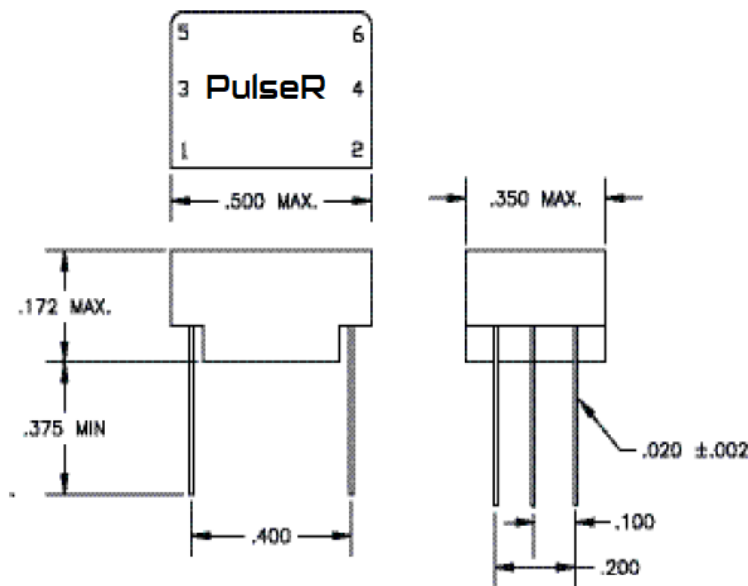

Notes:

1. Weight..... 1.99gm
2. Pan/Tube Size..... 1

Transceiver Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

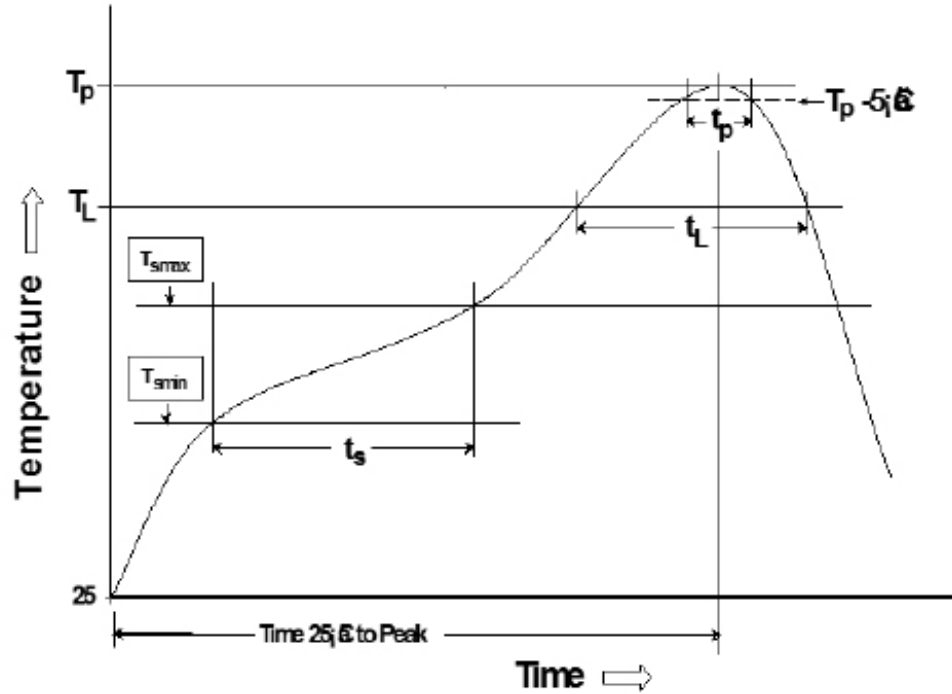

T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
100	150	183	225	60-120	60-150	20	3°C/s MAX	6°C/s MAX	360

Notes:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2.

For More Information

PulseR North America
Headquarters
Two Pearl Buck Court
Bristol, PA 19007
U.S.A.

For Global Sales Representatives and Locations Visit:
<http://www.pulseruggedized.com>

Tel: +1. 215. 781. 6400
Fax: +1. 215. 781. 6403

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018. PulseR, LLC. All rights reserved.