


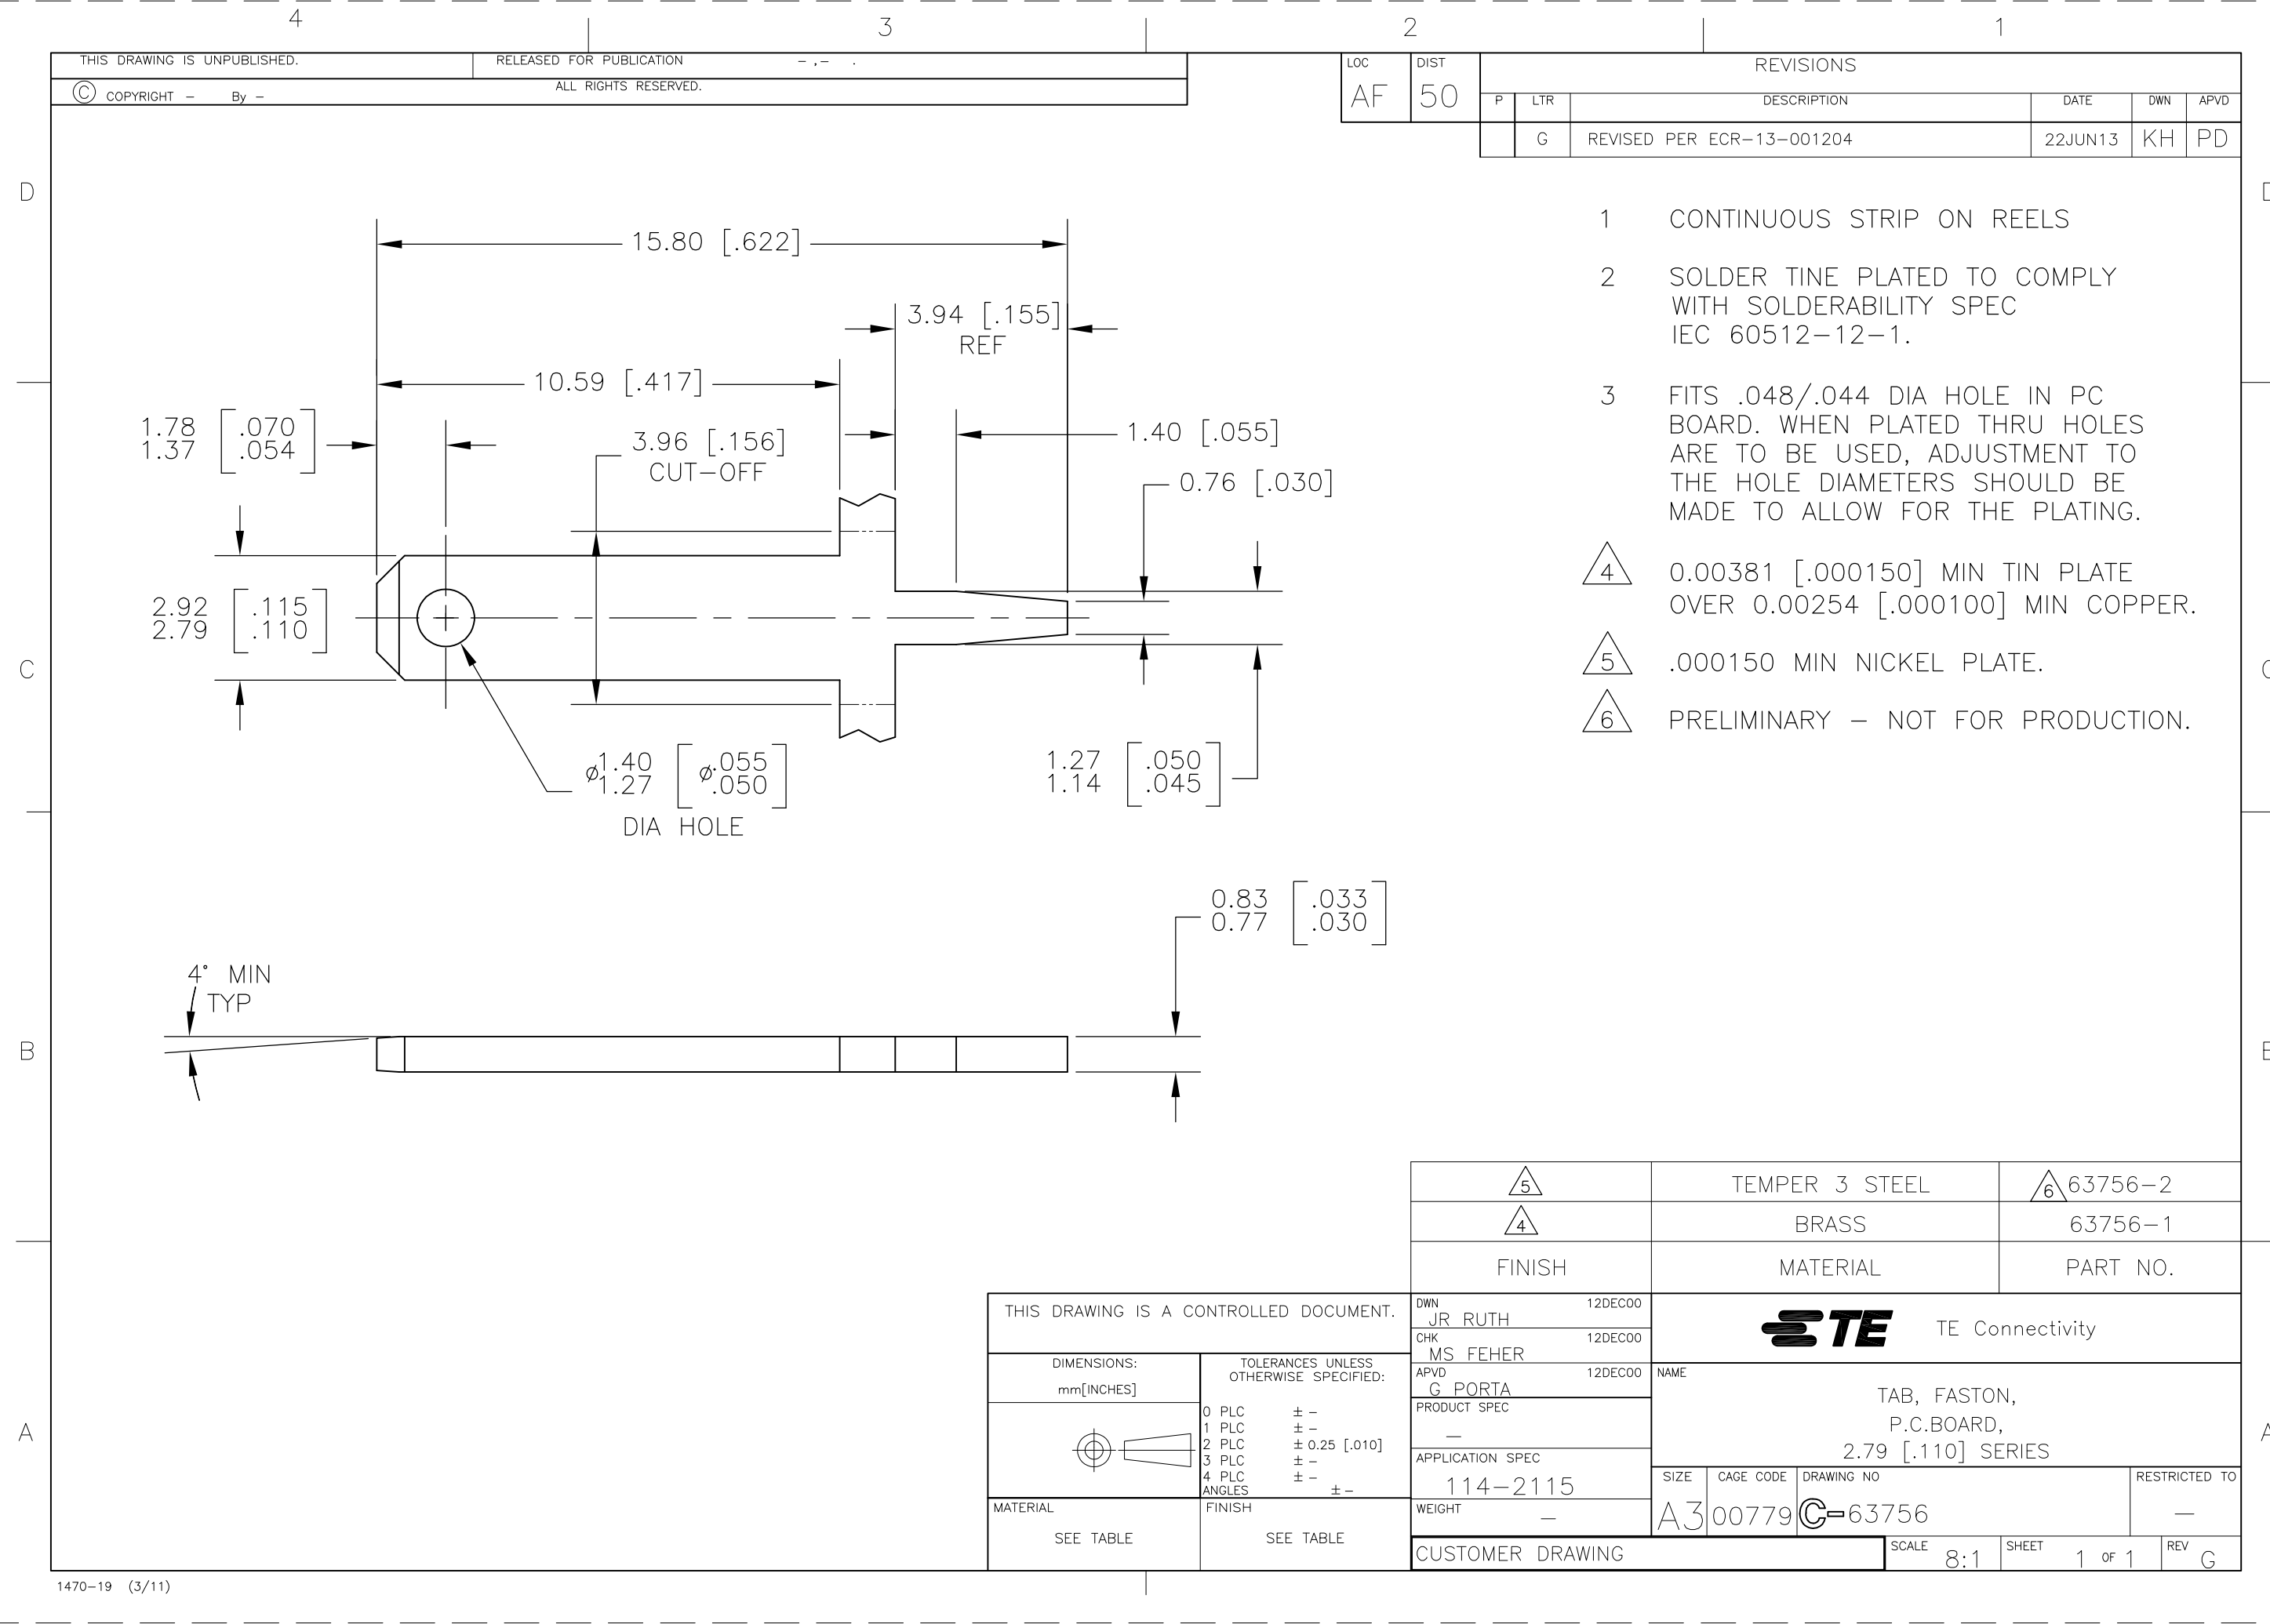

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - , - .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		G	REVISED PER ECR-13-001204	22JUN13	KH	PD

- 1
- CONTINUOUS STRIP ON REELS
- 2
- SOLDER TINE PLATED TO COMPLY WITH SOLDERABILITY SPEC IEC 60512-12-1.
- 3
- FITS .048/.044 DIA HOLE IN PC BOARD. WHEN PLATED THRU HOLES ARE TO BE USED, ADJUSTMENT TO THE HOLE DIAMETERS SHOULD BE MADE TO ALLOW FOR THE PLATING.
- 4
- 0.00381 [.000150] MIN TIN PLATE OVER 0.00254 [.000100] MIN COPPER.
- 5
- .000150 MIN NICKEL PLATE.
- 6
- PRELIMINARY - NOT FOR PRODUCTION.

5	TEMPER 3 STEEL	6 63756-2
4	BRASS	63756-1
FINISH	MATERIAL	PART NO.
DWN JR RUTH 12DEC00 CHK MS FEHER 12DEC00 APVD G PORTA 12DEC00 PRODUCT SPEC — APPLICATION SPEC 114-2115 WEIGHT —	TE Connectivity TAB, FASTON, P.C.BOARD, 2.79 [.110] SERIES	
SIZE A3	CAGE CODE 00779	DRAWING NO C-63756
CUSTOMER DRAWING		RESTRICTED TO —
SCALE 8:1	SHEET 1 OF 1	REV G

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [.010] 3 PLC ± - 4 PLC ± - ANGLES ± -
MATERIAL SEE TABLE	FINISH SEE TABLE