


REVISION

NOTES:

1. C REPRESENTS A CRITICAL DIMENSION.
2. RETENTION FORCE IN BODY TO BE .5[2N] LB MIN. C6 C6-F-SG

FIG. 1
FFMD-10-01-X SHOWN)

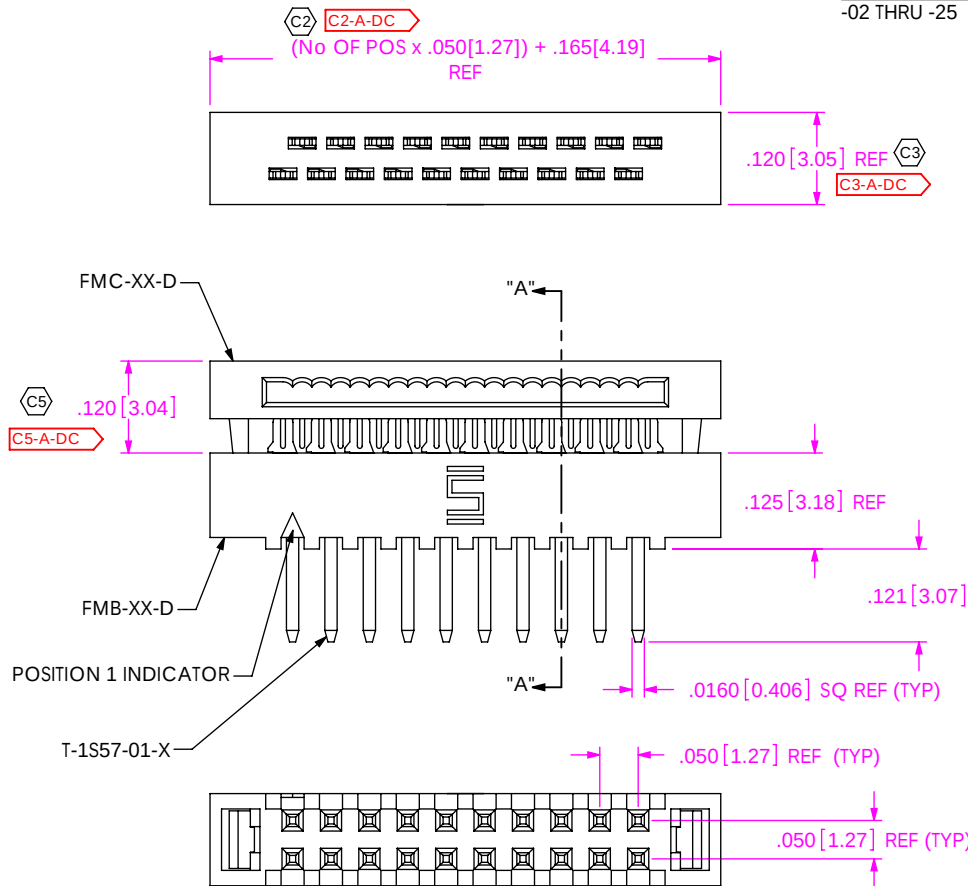


FFMD-XX-XX-X-XX


No OF POSITIONS PER ROW
-02 THRU -25

LEAD STYLE
-01: USE T-1S57-01-X

OPTIONS
-SR: STRAIN RELIEF
(SEE FIG. 2)
PLATING OPTIONS
LEAVE BLANK FOR STANDARD: USE T-1S57-01-T
-L: USE T-1S57-01-L
-F: USE T-1S57-01-F
-S: USE T-1S57-01-S

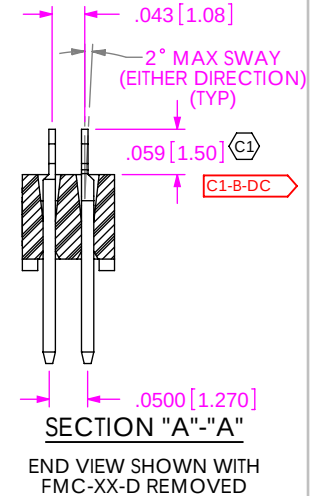


PACKAGING VIEW



USE PT-1-24-01-33
USE (2) TP-03
PARTS TO BE LOADED WITH
FIRST POSITION INDICATOR
TOWARD ARROW.

FIG. 2: -SR: STRAIN RELIEF
(FFMD-10-01-X-SR SHOWN)
(SAME AS FIG.1, DIFFERENT AS SHOWN)
SCALE: 2:1

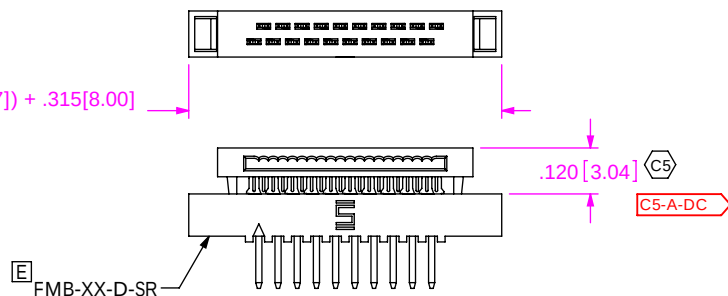

CRITICAL DIMENSION INSPECTION INSTRUCTION TABLE		
ASSEMBLY OPERATION	START-UP INSPECTION INSPECT CODE A	IN-PROCESS INSPECTION INSPECT CODE B
FILL T-1S57-01-X	C2, C3, C4	C1
INSERT FMC-XX-D	C5	

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: $\pm .01$ [.3] 2°
.XXX: $\pm .005$ [.13]
.XXXX: $\pm .0020$ [.051]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING
INSULATOR: PBT, COLOR: BLACK
TERMINAL: PHOS BRONZE, 510 SPRING

SHEET SCALE: 4:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:
.050 x .050 MALE IDC SUB ASSEMBLY
DWG. NO. **FFMD-XX-XX-X-XX**
BY: ERIC M. 9/6/01 SHEET 1 OF 1