

Smart-UPS

APC Smart-UPS X 1500VA Rack/Tower LCD 230V with Network Card



APC Smart-UPS, 1200 Watts / 1500 VA, Input 230V / Output 230V, Interface Port SmartSlot, USB, Extended runtime model, Rack Height 2 U



Includes: CD with software, Documentation CD, Installation guide, Rack Mounting support rails, Removable support feet, Smart UPS signalling RS-232 cable, USB cable

Output

Output Power Capacity	1200 Watts / 1500 VA	
Nominal Output Voltage	230V	
Output Frequency (sync to mains)	47 - 63 Hz	
Waveform Type	Sine wave	
Output Connections	(8) IEC 320 C13	
	(2) IEC Jumpers	


Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	IEC-320 C14
Cord Length	1.83 meters
Input voltage range for main operations	160 - 285V
Input voltage adjustable range for mains operation	151 - 302V
Input Breaker Capacity	20.0 A

Batteries & Runtime

Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof
Typical recharge time	3 hour(s)
Replacement Battery	APCRBC115
RBC™ Quantity	1
Extended Run Options	APC Smart-UPS X 1500VA Rack/Tower LCD 230V with Network Card
Runtime Graph	

Curve	Part Number(s)
A	SMX1500RMI2UNC
B	SMX1500RMI2UNC + (1)SMX48RMBP2U
C	SMX1500RMI2UNC + (2)SMX48RMBP2U
D	SMX1500RMI2UNC + (3)SMX48RMBP2U
E	SMX1500RMI2UNC + (4)SMX48RMBP2U

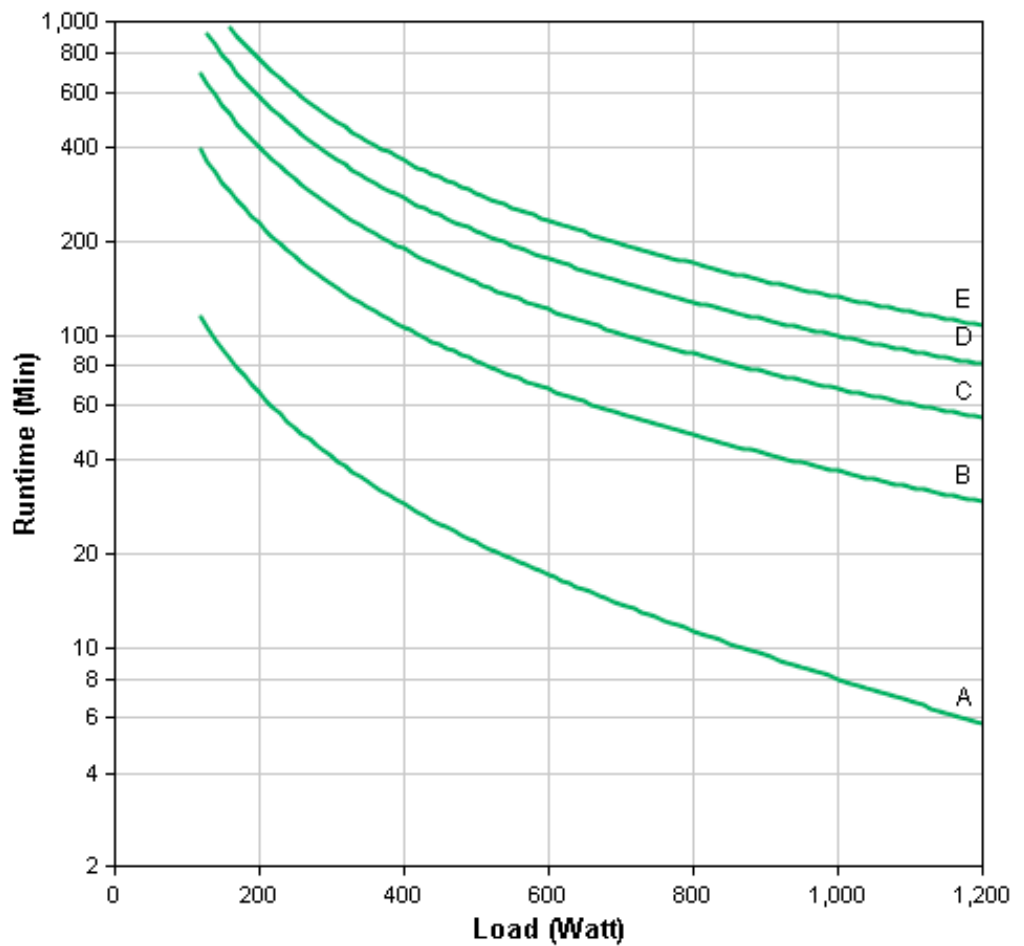


Hover over the line on the graph above to view the runtime at any desired load

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

[View Runtime Chart](#)

Energy Use/Efficiency

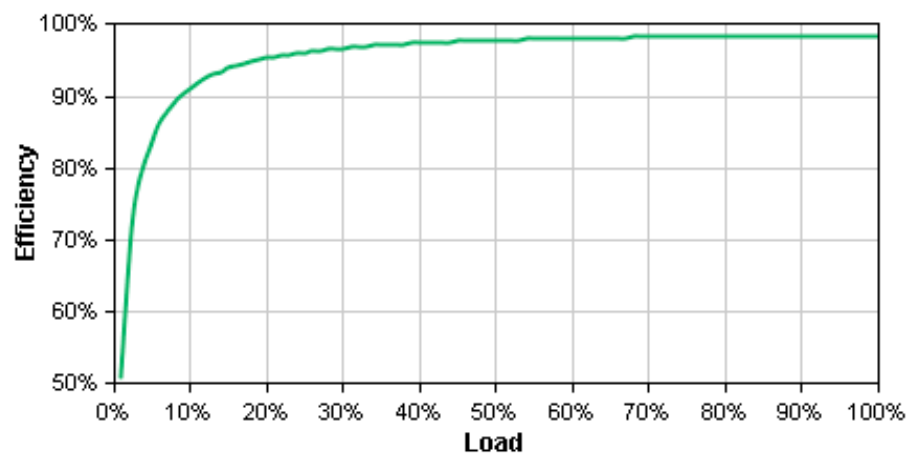

Hover over the line on the graph above to view the efficiency at any desired load

Curve fit to measured efficiency data. All measurements taken in normal operating mode, at typical environmental conditions, with nominal electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Chart](#)

Communications & Management

Interface Port(s)	SmartSlot,USB
Pre-Installed SmartSlot™ Cards	AP9631
Control panel	Multi-function LCD status and control console
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
Emergency Power Off (EPO)	Yes

Surge Protection and Filtering

Surge energy rating	645 Joules
Filtering	Full time multi-pole noise filtering : 5% IEEE surge let-through : zero clamping response time : meets UL 1449

Physical

Maximum Height	89.00 mm
Maximum Width	432.00 mm
Maximum Depth	490.00 mm
Rack Height	2U
Net Weight	24.82 KG
Shipping Weight	30.00 KG
Shipping Height	246.00 mm
Shipping Width	589.00 mm
Shipping Depth	620.00 mm
Color	Black
Units per Pallet	16.00

Environmental

Operating Environment	0 - 45 °C
Operating Relative Humidity	0 - 95%
Operating Elevation	0-3000 meters

Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	40.00 dBA
Online Thermal Dissipation	133.00 BTU/hr

Conformance

Regulatory Approvals	C-tick,CE,EN 50091-1,EN 50091-2,VDE
Standard Warranty	3 years repair or replace (excluding battery) and 2 year for battery
Environmental Compliance	RoHS 7b Exemption,REACH: Contains No SVHCs

**The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.

[Copyright](#) © American Power Conversion Corp., all rights reserved