


## Fully programmable four-channel codec and filter

### Features

- Fully programmable monolithic 4-channel codec/filter
- Single +3.3 V supply
- A/m law programmable
- Linear coding (16 bits) option
- PCM highway format automatically detected: 1.536 or 1.544 MHz, 2.048, 4.096, 8192 MHz
- Two PCM ports available
- TX gain programming: 33 dB range; <0.01 dB step
- RX gain programming: 42 dB range; <0.01 dB step
- Programmable SLIC input impedance
- Programmable transhybrid balance filter
- Programmable equalization (frequency response)
- Programmable time slot assignment
- Digital and analog loopbacks
- SLIC control port static (16 I/Os), dynamic (12 I/Os + 4 CS)
- Built-in test mode with tone generation, MCU access to PCM data
- 64 TQFP (10x10mm) package
- Programmable SLIC line current limitation
- Programmable SLIC off-hook detection threshold



TQFP64 (10x10x1.4mm)

### Description

The STLC5048 is a monolithic fully programmable 4-channel codec and filter. It operates with a single +3.3V supply.

The analog interface is based on a receive output buffer driving the SLIC RX input and on an amplifier input stage normally driven by the SLIC TX output. Due to the single supply voltage a mid-supply reference level is generated internally by the device and all analog signals are referred to this level (AGND). The PCM interface uses one common 8 kHz frame sync. pulse for transmit and receive direction. The bit clock is automatically detected between four standards: 1.563/1.544 MHz, 2.048 MHz, 4.096 MHz, 8192 MHz.

Two PCM port are provided: the channels can be connected to port A or/and B.

Device programmability is achieved by means of several registers and commands allowing to set the different parameters like TX/RX gains, line impedance, transhybrid balance, equalization (frequency response), encoding law (A/m), time slot assignment, independent channels power up/down, loopbacks, PCM bits offset.

The STLC5048 can be programmed via serial interface running up to 8 MHz. One interrupt output pin is also provided.

A GUI interface is also available to emulate and program the coefficients for impedance synthesis, echo cancelling and channel filtering.

# Contents

|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| <b>1</b> | <b>Block diagram</b>                                     | <b>8</b>  |
| <b>2</b> | <b>Absolute maximum ratings and operating conditions</b> | <b>9</b>  |
| <b>3</b> | <b>Pin assignments and descriptions</b>                  | <b>10</b> |
| <b>4</b> | <b>Functional description</b>                            | <b>14</b> |
| 4.1      | Power on initialization                                  | 14        |
| 4.2      | Power down state                                         | 14        |
| 4.3      | Ringling state                                           | 15        |
| 4.4      | Impedance synthesis                                      | 15        |
| 4.5      | Echo canceling                                           | 15        |
| 4.6      | Transmit path                                            | 15        |
| 4.7      | Receive path                                             | 16        |
| 4.8      | PCM interface                                            | 17        |
| 4.9      | MCU control interface                                    | 18        |
| 4.10     | Programming the device                                   | 19        |
| 4.11     | SLIC control interface                                   | 20        |
| 4.12     | DC SLIC programmability                                  | 20        |
| 4.13     | Built-in test                                            | 20        |
| <b>5</b> | <b>Register description</b>                              | <b>23</b> |
| 5.1      | I/O direction register (DIR)                             | 23        |
| 5.2      | I/O data register channel #0 (DATA0)                     | 23        |
| 5.3      | I/O data register channel #1 (DATA1)                     | 24        |
| 5.4      | I/O data register channel #2 (DATA2)                     | 25        |
| 5.5      | I/O data register channel #3 (data3)                     | 25        |
| 5.6      | Persistency check register (PCHK-A/B)                    | 26        |
| 5.7      | Interrupt register (INT)                                 | 27        |
| 5.8      | Interrupt mask register for I/O port (DMASK)             | 28        |
| 5.9      | Interrupt mask register for interrupt (IMASK)            | 28        |
| 5.10     | Alarm register (ALARM)                                   | 29        |

|          |                                            |           |
|----------|--------------------------------------------|-----------|
| 5.11     | Configuration register (CONF)              | 30        |
| 5.12     | Command enable register (COMEN)            | 30        |
| 5.13     | Synchronous check register (SYNCK)         | 31        |
| 5.14     | DSP status register (CTRLACK)              | 31        |
| 5.15     | Checksum register (CKSUM)                  | 31        |
| 5.16     | Loopback register (LOOPB)                  | 32        |
| 5.17     | Transmit pre-amplifier gain register (TXG) | 32        |
| 5.18     | Receive amplifier gain register (RXG)      | 33        |
| 5.19     | SLIC line current limit reg (ILIM)         | 33        |
| 5.20     | SLIC off-hook threshold register (ITH)     | 34        |
| 5.21     | PCM shift register (PCMSH)                 | 34        |
| 5.22     | PCM command register (PCMCOM)              | 34        |
| 5.23     | Transmit time slot ch #0 (DXTS0)           | 36        |
| 5.24     | Transmit time slot ch #1 (DXTS1)           | 36        |
| 5.25     | Transmit time slot ch #2 (DXTS2)           | 37        |
| 5.26     | Transmit time slot ch #3 (DXTS3)           | 37        |
| 5.27     | Receive time slot ch #0 (DRTS0)            | 38        |
| 5.28     | Receive time slot ch #1 (DRTS1)            | 39        |
| 5.29     | Receive time slot ch #2 (DRTS2)            | 39        |
| 5.30     | Receive time slot ch #3 (DRTS3)            | 40        |
| 5.31     | PCMW data register (PCMWD)                 | 40        |
| 5.32     | PCMR data register (PCMRD)                 | 41        |
| 5.33     | PCM control register (PCMCTRL)             | 41        |
| 5.34     | Tone generation register (TONEG)           | 42        |
| 5.35     | Coefficient state register (COEFST)        | 42        |
| 5.36     | Software revision ID Code (SWRID)          | 42        |
| 5.37     | Hardware revision ID code (HWRID)          | 43        |
| <b>6</b> | <b>Single byte instruction</b>             | <b>44</b> |
| 6.1      | Realignment command (REACOM)               | 44        |
| 6.2      | Start checksum calculation (CKSTART)       | 44        |
| <b>7</b> | <b>Command list</b>                        | <b>45</b> |

|                             |                                                   |           |
|-----------------------------|---------------------------------------------------|-----------|
| <b>8</b>                    | <b>Command description</b>                        | <b>46</b> |
| 8.1                         | Block enable command (BLKEN)                      | 46        |
| 8.2                         | KD filter (KDF)                                   | 46        |
| 8.3                         | AFE coefficient (AFE_CFF)                         | 47        |
| 8.4                         | Timeout value (T_OUT)                             | 47        |
| 8.5                         | Receive gain (GRX)                                | 48        |
| 8.6                         | Transmit gain (GTX)                               | 48        |
| 8.7                         | R filter coefficient (RFC)                        | 48        |
| 8.8                         | X filter coefficient (XFC)                        | 49        |
| 8.9                         | B filter coefficient (BFC)                        | 49        |
| 8.10                        | Z filter coefficient (ZFC)                        | 49        |
| <b>9</b>                    | <b>Electrical characteristics</b>                 | <b>50</b> |
| <b>10</b>                   | <b>Package mechanical data</b>                    | <b>57</b> |
| <b>Appendix A</b>           | <b>Absolute gains in kit with L3235N/STLC3080</b> | <b>58</b> |
| <b>Appendix B</b>           | <b>STLC5048 application diagrams</b>              | <b>60</b> |
| <b>Appendix C</b>           | <b>Power sequences</b>                            | <b>62</b> |
| C.1                         | Power-up sequence                                 | 62        |
| C.2                         | Power-on sequence                                 | 62        |
| <b>Ordering information</b> |                                                   | <b>63</b> |
| <b>Revision history</b>     |                                                   | <b>63</b> |

## List of tables

|           |                                                             |    |
|-----------|-------------------------------------------------------------|----|
| Table 1.  | Absolute maximum ratings                                    | 9  |
| Table 2.  | Operating range                                             | 9  |
| Table 3.  | Thermal data                                                | 9  |
| Table 4.  | I/O definitions                                             | 10 |
| Table 5.  | Pin descriptions                                            | 11 |
| Table 6.  | Instruction byte structure                                  | 18 |
| Table 7.  | Register addresses                                          | 20 |
| Table 8.  | I/O direction register (DIR) bits                           | 23 |
| Table 9.  | I/O direction register (DIR) bits                           | 23 |
| Table 10. | Dynamic I/O data register channel #0 (DATA0) bits           | 23 |
| Table 11. | Dynamic I/O data register channel #0 (DATA0) bits           | 23 |
| Table 12. | Static I/O data register channel #0 (DATA0) bits            | 24 |
| Table 13. | Static I/O data register channel #0 (DATA0) bits            | 24 |
| Table 14. | Dynamic I/O data register channel #1 (DATA1) bits           | 24 |
| Table 15. | Dynamic I/O data register channel #1 (DATA1) bits           | 24 |
| Table 16. | Static I/O data register channel #1 (DATA1) bits            | 24 |
| Table 17. | Dynamic I/O data register channel #2 (DATA2) bits           | 25 |
| Table 18. | Dynamic I/O data register channel #2 (DATA2) bits           | 25 |
| Table 19. | Static I/O data register channel #2 (DATA2) bits            | 25 |
| Table 20. | Dynamic I/O data register channel #3 (data3) bits           | 25 |
| Table 21. | Dynamic I/O data register channel #3 (data3) bits           | 26 |
| Table 22. | A and B inputs of persistency check register in static mode | 26 |
| Table 23. | Persistency check register (PCHK-A/B) bits                  | 26 |
| Table 24. | Persistency check register (PCHK-A/B) bits                  | 26 |
| Table 25. | Interrupt register (INT) bits                               | 27 |
| Table 26. | Interrupt mask register for I/O port (DMASK) bits           | 28 |
| Table 27. | Interrupt mask register for I/O port (DMASK) bits           | 28 |
| Table 28. | Interrupt mask register for interrupt (IMASK) bits          | 28 |
| Table 29. | Alarm register (ALARM) bits                                 | 29 |
| Table 30. | Configuration register (CONF) bits                          | 30 |
| Table 31. | Command enable register (COMEN) bits                        | 30 |
| Table 32. | Synchronous check register (SYNCK) bits                     | 31 |
| Table 33. | DSP status register (CTRLACK) bits                          | 31 |
| Table 34. | Checksum register (CKSUM) bits                              | 31 |
| Table 35. | Checksum register (CKSUM) bits                              | 31 |
| Table 36. | Loopback register (LOOPB) bits                              | 32 |
| Table 37. | Transmit pre-amplifier gain register (TXG) bits             | 32 |
| Table 38. | Receive amplifier gain register (RXG) bits                  | 33 |
| Table 39. | SLIC line current limit reg (ILIM) bits                     | 33 |
| Table 40. | SLIC off-hook threshold register (ITH) bits                 | 34 |
| Table 41. | PCM shift register (PCMSH) bits                             | 34 |
| Table 42. | PCM command register (PCMCOM) bits                          | 34 |
| Table 43. | PCM command register (PCMCOM) TPB and TPA bit combinations  | 35 |
| Table 44. | PCM command register (PCMCOM) PC0 and PC1 bit combinations  | 35 |
| Table 45. | Transmit time slot ch #0 (DXTS0) bits                       | 36 |
| Table 46. | Transmit time slot ch #0 (DXTS0) time slots in linear mode  | 36 |
| Table 47. | Transmit time slot ch #1 (DXTS1) bits                       | 36 |
| Table 48. | Transmit time slot ch #1 (DXTS1) time slots in linear mode  | 37 |


|           |                                                            |    |
|-----------|------------------------------------------------------------|----|
| Table 49. | Transmit time slot ch #2 (DXTS2) bits                      | 37 |
| Table 50. | Transmit time slot ch #2 (DXTS2) time slots in linear mode | 37 |
| Table 51. | Transmit time slot ch #3 (DXTS3) bits                      | 37 |
| Table 52. | Transmit time slot ch #3 (DXTS3) time slots in linear mode | 38 |
| Table 53. | Receive time slot ch #0 (DRTS0) bits                       | 38 |
| Table 54. | Receive time slot ch #0 (DRTS0) time slots in linear mode  | 38 |
| Table 55. | Receive time slot ch #1 (DRTS1) bits                       | 39 |
| Table 56. | Receive time slot ch #1 (DRTS1) time slots in linear mode  | 39 |
| Table 57. | Receive time slot ch #2 (DRTS2) bits                       | 39 |
| Table 58. | Receive time slot ch #2 (DRTS2) time slots in linear mode  | 39 |
| Table 59. | Receive time slot ch #3 (DRTS3) bits                       | 40 |
| Table 60. | Receive time slot ch #3 (DRTS3) time slots in linear mode  | 40 |
| Table 61. | PCMW data register (PCMWD) bits                            | 40 |
| Table 62. | PCMW data register (PCMWD) bits                            | 40 |
| Table 63. | PCMR data register (PCMRD) bits                            | 41 |
| Table 64. | PCMR data register (PCMRD) bits                            | 41 |
| Table 65. | PCM control register (PCMCTRL) bits                        | 41 |
| Table 66. | Tone generation register (TONEG) bits                      | 42 |
| Table 67. | Coefficient state register (COEFST) bits                   | 42 |
| Table 68. | Software revision ID Code (SWRID) bits                     | 42 |
| Table 69. | Hardware revision ID code (HWRID) bits                     | 43 |
| Table 70. | Single byte instruction                                    | 44 |
| Table 71. | Realignment command (REACOM)                               | 44 |
| Table 72. | Start checksum calculation (CKSTART)                       | 44 |
| Table 73. | Command list                                               | 45 |
| Table 74. | Block enable command (BLKEN) bits                          | 46 |
| Table 75. | KD filter (KDF) bits                                       | 46 |
| Table 76. | AFE coefficient (AFE_CFF) bits                             | 47 |
| Table 77. | Timeout value (T_OUT) bits                                 | 47 |
| Table 78. | Receive gain (GRX) bits                                    | 48 |
| Table 79. | Transmit gain (GTX) bits                                   | 48 |
| Table 80. | R filter coefficient (RFC) bits                            | 48 |
| Table 81. | X filter coefficient (XFC) bits                            | 49 |
| Table 82. | B filter coefficient (BFC) bits                            | 49 |
| Table 83. | Z filter coefficient (ZFC) bits                            | 49 |
| Table 84. | Electrical characteristics                                 | 50 |
| Table 85. | Order codes                                                | 63 |
| Table 86. | Document revision history                                  | 63 |

## List of figures

|            |                                                               |    |
|------------|---------------------------------------------------------------|----|
| Figure 1.  | Block diagram . . . . .                                       | 8  |
| Figure 2.  | Pin assignments (top view) . . . . .                          | 10 |
| Figure 3.  | Block diagram of a single channel . . . . .                   | 14 |
| Figure 4.  | Transmit path . . . . .                                       | 15 |
| Figure 5.  | Receive path . . . . .                                        | 16 |
| Figure 6.  | PCM interface timing . . . . .                                | 55 |
| Figure 7.  | Serial control port timing . . . . .                          | 55 |
| Figure 8.  | SLIC control port timing . . . . .                            | 55 |
| Figure 9.  | Group delay distortion mask . . . . .                         | 56 |
| Figure 10. | TQFP64 mechanical data and package dimensions . . . . .       | 57 |
| Figure 11. | STLC5048 in kit with STLC3080 AC application diagram. . . . . | 58 |
| Figure 12. | STLC5048 in kit with L3235N AC application diagram . . . . .  | 58 |
| Figure 13. | Absolute gain in TX path. . . . .                             | 59 |
| Figure 14. | STLC5048 plus L3235N/L324 kit application diagram . . . . .   | 60 |
| Figure 15. | STLC5048 plus STLC3080 application diagram. . . . .           | 61 |

# 1 Block diagram

Figure 1. Block diagram

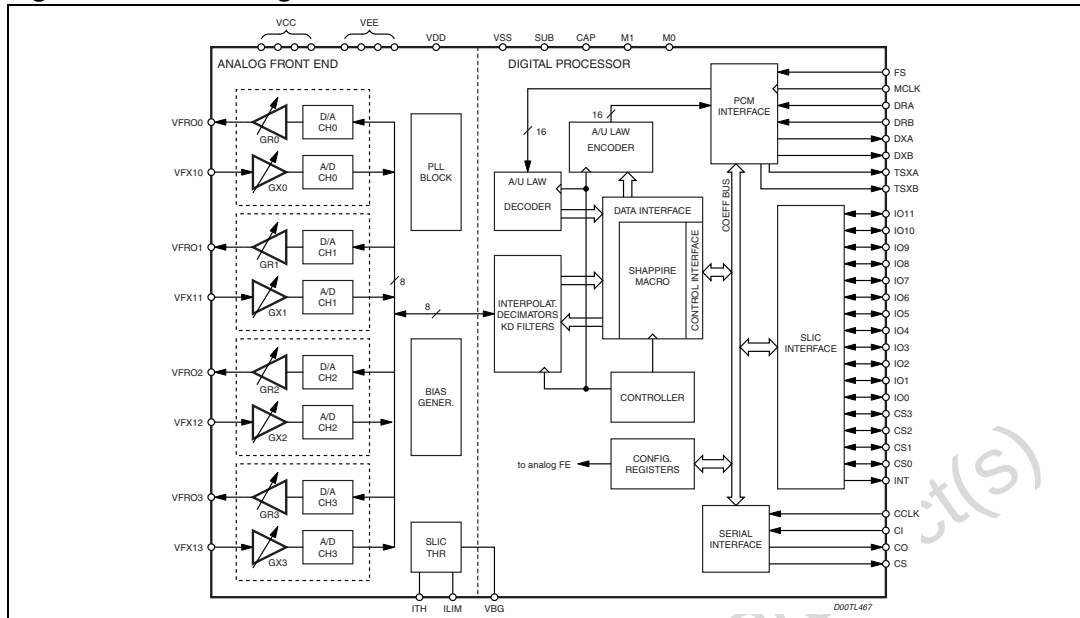



## 2 Absolute maximum ratings and operating conditions

**Table 1. Absolute maximum ratings**

| Symbol     | Parameter                                                       | Value                           | Unit |
|------------|-----------------------------------------------------------------|---------------------------------|------|
| $V_{CC}$   | $V_{CC}$ to $V_{EE}$                                            | 4.6                             | V    |
| $V_{DD}$   | $V_{DD}$ to $V_{SS}$                                            | 4.6                             | V    |
| $V_{DIN}$  | Digital input pin voltage                                       | 5.5                             | V    |
| $V_{Ain}$  | Analog input pin voltage ( $V_{DD}=V_{CC}$ ; $V_{EE}=V_{SUB}$ ) | $V_{CC} + 0.5$ ; $V_{EE} - 0.5$ | V    |
| $T_{STG}$  | Storage temperature range                                       | -65 to +150                     | °C   |
| $T_{LEAD}$ | Lead temperature (soldering, 10s)                               | 300                             | °C   |

**Table 2. Operating range**

| Symbol              | Parameter                   | Value      | Unit |
|---------------------|-----------------------------|------------|------|
| $V_{CC}$ , $V_{DD}$ | Supply voltage              | 3.3 +/- 5% | V    |
| $T_{OP}$            | Operating temperature range | -40 to +85 | °C   |

**Table 3. Thermal data**

| Symbol         | Parameter                           | Value | Unit |
|----------------|-------------------------------------|-------|------|
| $R_{th j-amb}$ | Thermal resistance junction-ambient | 70    | °C/W |

### 3 Pin assignments and descriptions

Figure 2. Pin assignments (top view)

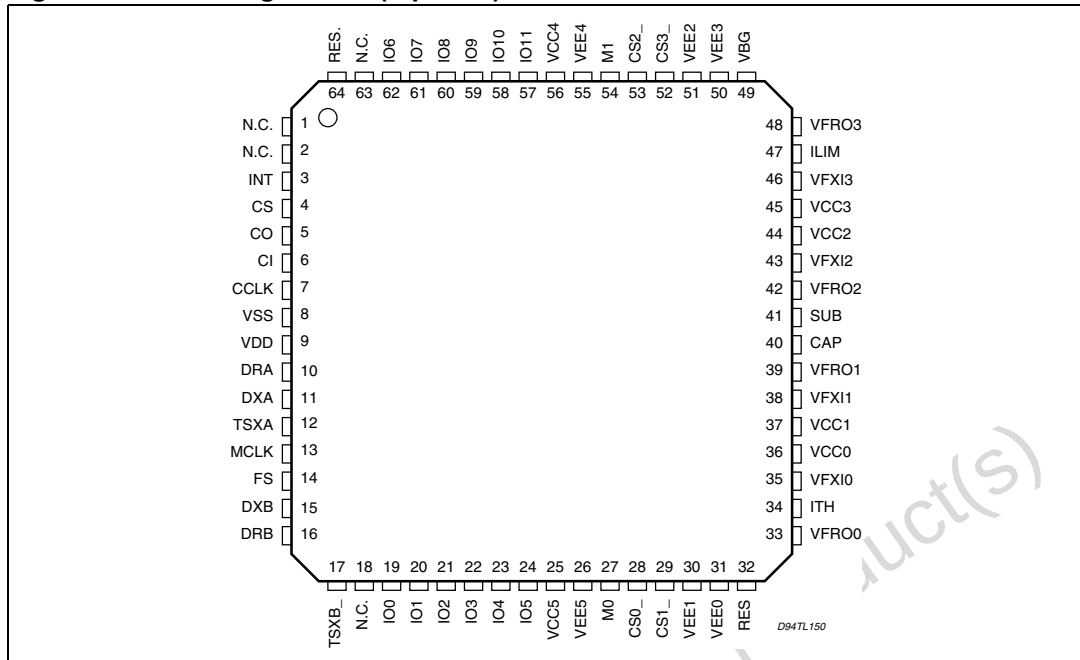


Table 4. I/O definitions

| Type | Definition              |
|------|-------------------------|
| AI   | Analog input            |
| AO   | Analog output           |
| ODO  | Open drain output       |
| DI   | Digital input           |
| DO   | Digital output          |
| DIO  | Digital input / output  |
| DTO  | Digital tristate output |
| DPS  | Digital power supply    |
| APS  | Analog power supply     |

Table 5. Pin descriptions

| No.                       | Name     | Type             | Description                                                                                                                                                                                                                                                                                                                        |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
|---------------------------|----------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|-------------|---|---|--------------|---|---|------------------|---|---|-------------|---|---|-------------|
| Analog pins               |          |                  |                                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 33                        | VFRO0    | AO               | Receive analog amplifier output channel 0. PCM data received on the programmed time slot on DR input is decoded and appears at this output.                                                                                                                                                                                        |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 39                        | VFRO1    | AO               | Receive analog amplifier output channel 1. PCM data received on the programmed time slot on DR input is decoded and appears at this output.                                                                                                                                                                                        |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 42                        | VFRO2    | AO               | Receive analog amplifier output channel 2. PCM data received on the programmed time slot on DR input is decoded and appears at this output.                                                                                                                                                                                        |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 48                        | VFRO3    | AO               | Receive analog amplifier output channel 3. PCM data received on the programmed time slot on DR input is decoded and appears at this output.                                                                                                                                                                                        |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 35                        | VFXI0    | AI               | TX input amplifier channel 0. Typ 1MΩ input impedance                                                                                                                                                                                                                                                                              |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 38                        | VFXI1    | AI               | TX input amplifier channel 1. Typ 1MΩ input impedance                                                                                                                                                                                                                                                                              |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 43                        | VFXI2    | AI               | TX input amplifier channel 2. Typ 1MΩ input impedance                                                                                                                                                                                                                                                                              |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 46                        | VFXI3    | AI               | TX input amplifier channel 3. Typ 1MΩ input impedance                                                                                                                                                                                                                                                                              |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 40                        | CAP      |                  | AGND voltage filter pin: a 100 nF capacitor must be connected between ground and this pin.                                                                                                                                                                                                                                         |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 34                        | ITH      | AO               | SLIC off-hook detection threshold.                                                                                                                                                                                                                                                                                                 |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 47                        | ILIM     | AO               | SLIC line current limitation.                                                                                                                                                                                                                                                                                                      |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 49                        | VBG      | AI               | SLIC VBG reference for DC characteristics programmability.                                                                                                                                                                                                                                                                         |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| Power supply              |          |                  |                                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 25,36,<br>37,44,<br>45,56 | VCC0..5  | APS              | Total 6 pins: 3.3 V analog power supplies, should be shorted together, require 100 nF decoupling capacitor to VEE.                                                                                                                                                                                                                 |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 26,30,<br>31,50,<br>51,55 | VEE0..5  | APS              | Total 6 pins: analog ground, should be shorted together.                                                                                                                                                                                                                                                                           |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 9                         | VDD      | DPS              | Digital power supply 3.3 V, require 100 nF decoupling capacitor to VSS.                                                                                                                                                                                                                                                            |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 8                         | VSS      | DPS              | Digital ground.                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 41                        | SUB      | DPS              | Substrate connection. Must be shorted together with VEE and VSS pins.                                                                                                                                                                                                                                                              |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| Digital pins              |          |                  |                                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 27<br>54                  | M0<br>M1 | DI               | Mode select:<br><table><tr><td>M1</td><td>M0</td><td>Mode select</td></tr><tr><td>0</td><td>0</td><td>Reset status</td></tr><tr><td>1</td><td>0</td><td>Normal operation</td></tr><tr><td>0</td><td>1</td><td>Not allowed</td></tr><tr><td>1</td><td>1</td><td>Not allowed</td></tr></table>                                       | M1 | M0 | Mode select | 0 | 0 | Reset status | 1 | 0 | Normal operation | 0 | 1 | Not allowed | 1 | 1 | Not allowed |
| M1                        | M0       | Mode select      |                                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 0                         | 0        | Reset status     |                                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 1                         | 0        | Normal operation |                                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 0                         | 1        | Not allowed      |                                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 1                         | 1        | Not allowed      |                                                                                                                                                                                                                                                                                                                                    |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |
| 14                        | FS       | DI               | Frame sync. Pulse. A pulse or a square waveform with an 8 kHz repetition rate is applied to this pin to define the start of the receive and transmit frame. Effective start of the frame can be then shifted of up to 7 clock pulses independently in receive and transmit directions by proper programming of the PCMSH register. |    |    |             |   |   |              |   |   |                  |   |   |             |   |   |             |

Table 5. Pin descriptions (continued)

| No. | Name | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 13  | MCLK | DI   | Master clock input.<br>Four possible frequencies can be used:<br>1.536/1.544 MHz; 2.048 MHz; 4.096 MHz; 8.192 MHz.<br>The device automatically detect the frequency applied.<br>This signal is also used as bit clock and it is used to shift data into and out of the DRA/B and DXA/B pins.                                                                                                                |
| 12  | TSXA | ODO  | Transmit time slot (open drain output, 3.2mA). Normally it is floating in high impedance state except when a time slot is active on the DXA output. In this case TSXA output pulls low to enable the backplane line driver.                                                                                                                                                                                 |
| 11  | DXA  | DTO  | Transmit PCM interface A. It remains in high impedance state except during the assigned time slots during which the PCM data byte is shifted out on the rising edge of MCLK.                                                                                                                                                                                                                                |
| 10  | DRA  | DI   | Receive PCM interface A. It remains inactive except during the assigned receive time slots during which the PCM data byte is shifted in on the falling edge of MCLK.                                                                                                                                                                                                                                        |
| 24  | IO5  | DIO  | General control I/O pin #5. Can be programmed as input or output via DIR register. Depending on content of CONF register can be a static input/output or a dynamic input/output synchronized with the CSn output signals controlling the SLICs.                                                                                                                                                             |
| 62  | IO6  | DIO  | General control I/O pin #6. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 61  | IO7  | DIO  | General control I/O pin #7. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 60  | IO8  | DIO  | General control I/O pin #8. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 59  | IO9  | DIO  | General control I/O pin #9. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 58  | IO10 | DIO  | General control I/O pin #10. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                         |
| 57  | IO11 | DIO  | General control I/O pin #11. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                         |
| 19  | IO0  | DIO  | General control I/O pin #0. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 20  | IO1  | DIO  | General control I/O pin #1. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 21  | IO2  | DIO  | General control I/O pin #2. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 22  | IO3  | DIO  | General control I/O pin #3. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 23  | IO4  | DIO  | General control I/O pin #4. (see IO5 description).                                                                                                                                                                                                                                                                                                                                                          |
| 28  | CS0  | DIO  | SLIC CS control #0. Depending on CONF reg. content can be a CS output for SLIC #0 or a static I/O.<br>When configured as CS output it is automatically generated by the CODEC with a repetition time of 31.25ms. In this mode also the IO0..11 are synchronized and carry proper data in and out synchronous with CS.<br>When configured as static I/O, the direction is defined by CSDIR register content. |
| 29  | CS1  | DIO  | SLIC CS control #1, (see CS0 description).                                                                                                                                                                                                                                                                                                                                                                  |
| 53  | CS2  | DIO  | SLIC CS control #2, (see CS0 description).                                                                                                                                                                                                                                                                                                                                                                  |
| 52  | CS3  | DIO  | SLIC CS control #3, (see CS0 description).                                                                                                                                                                                                                                                                                                                                                                  |

Table 5. Pin descriptions (continued)

| No.                  | Name | Type | Description                                                                                                                                                                                                                         |
|----------------------|------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4                    | CS   | DI   | Chip select input, when this pin is low control information can be written to or read from the device via the CI and CO pins.                                                                                                       |
| 7                    | CCLK | DI   | Clock of serial control bus. this clock shifts serial control information into or out of CI or CO when CS input is low depending on the current instruction. CCLK may be asynchronous with the other system clocks.                 |
| 6                    | CI   | DI   | Control data input of serial control bus.<br>Control data is shifted in the device when CS is low and clocked by CCLK. Depending on the addressed register different numbers of consecutive bytes can be loaded.                    |
| 5                    | CO   | DI   | Control data output of serial control bus.<br>Control data is shifted out the device when CS is low and clocked by CCLK. Depending on the addressed register different numbers of consecutive bytes can be shifted out.             |
| 3                    | INT  | ODO  | Interrupt output (open drain), goes low when a data change has been detected in the I/O pins or another interrupt source is active. One mask register allows to mask any I/O pin. Interrupt is reset when the I/O register is read. |
| 17                   | TSXB | ODO  | Transmit time slot (open drain output, 3.2 mA). Normally it is floating in high impedance state except when a time slot is active on the DXB output. In this case TSXB output pulls low to enable the backplane line driver.        |
| 15                   | DXB  | DTO  | Transmit PCM interface B. It remains in high impedance state except during the assigned time slots during which the PCM data byte is shifted out on the rising edge of MCLK.                                                        |
| 16                   | DRB  | DI   | Receive PCM interface B. It remains inactive except during the assigned receive time slots during which the PCM data byte is shifted in on the falling edge of MCLK.                                                                |
| <b>Not connected</b> |      |      |                                                                                                                                                                                                                                     |
| 2, 18, 63, 1         | N.C. |      | Not connected, must be left open                                                                                                                                                                                                    |
| 32, 64               | RES  |      | Reserved pins, must be connected to ground                                                                                                                                                                                          |

## 4 Functional description

The STLC5048 is a fully programmable device with embedded ROM and RAM. The ROM is used to contain the default state coefficients for the programmable filters, while the RAM is used to load the desired coefficient values.

### 4.1 Power on initialization

When power is first applied it is recommended to reset the device ( $M1=M0=0$ ) in order to set all the internal registers to the reset value (see [Chapter 5: Register description](#); this means also power down mode for all the four channels and SW reset bit (RES) set in the CONF register.

When the RES bit is set, the only instructions allowed are the one that disable this bit and the REACOM instruction: all other instructions are ignored. It is not possible to disable the RES bit and write the other bits of the CONF register with the same instruction.

Of course, RESET mode can be programmed also by writing the RES bit of the CONF register.

See [Appendix C: Power sequences](#) for the power up sequence.

During RESET condition all the I/On and CSn pins are set as inputs, DX is in high impedance and all VFROn are set to AGND. After the reset all registers are loaded with the reset value.


It means that the PCM interface and all the VFRO outputs are configured as described in the power down state, while no transmit or receive time slot are set.

Then, filters and gain blocks are configured with the coefficient defined in the default state.

### 4.2 Power down state

Each of the four channel may be put into power down mode by setting the appropriate bit in the CONF register. In this mode the eventual programmed DX channel is set in high impedance while the VFRO outputs are forced to AGND. When all the channels are set in power down mode the device enters the power down state: all the blocks related to the data processing are turned off, while the RAM is On or Off according to the PDR bit value in the COMEN register.

**Figure 3. Block diagram of a single channel**

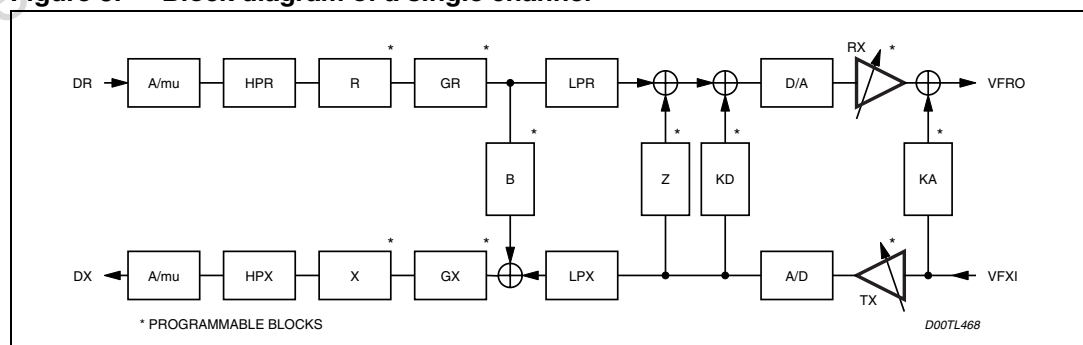

### 4.3 Ringing state

This state can be used during the ringing phase in order to transmit a low frequency ringing signal (25-50 Hz). In order to obtain a 1 Vrms ringing signal at VFRO output a digital signal DR equal to -0.78 dBm0 must be provided.

This state means B, Z, X, KD and KA blocks equal to open circuits and the R block configured in order to obtain the maximum gain at the frequency of 25-50 Hz. During the ringing state if the TX time slot is enabled the idle PCM code is forced to DX.

To switch to this state, a bit (FR0..3) in the COEFST register must be set for every channel.

The programmed values for the previous blocks become active only when the FR and FD bits are reset.

If both FR and FD bits of a channel are set, the selected coefficient will be those of the ringing state.

### 4.4 Impedance synthesis

The impedance synthesis is performed by fully digital filters (Z and KD) and by an analog path (KA).


The Z, KD and KA filters report to the receive path the feedback signal coming from the transmit path. The coefficients of the Z, KD and KA filters are programmed via the ZFC, KD and AFE\_CFF commands respectively.

### 4.5 Echo canceling

The trans-hybrid balance is performed by the digital programmable filter B.

The B filter reports to the transmit path the signal coming from the receive path. The coefficient of the B filter are programmed via the BFC command.

**Figure 4. Transmit path**

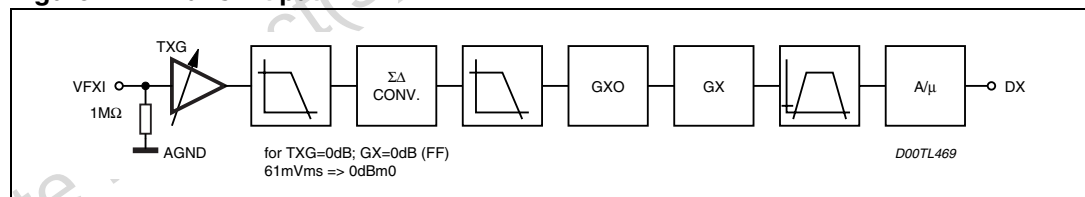

### 4.6 Transmit path

The transmit section input consist of the input amplifier, the A/D converter, the equalization filter X, the gain block GX, the encoder and the channel filters (LPX and HPX).

The input amplifier is provided of a programmable gain with a typical input impedance of 1MΩ. The amplifier gain can be programmed with two different values (0 dB, +3.52dB) by means of the TXG register.

VFXI input must be AC coupled to the signal; the voltage swing allowed is 1.4 V<sub>pp</sub> when the preamplifier gain is set to 0 dB and 0.93 V<sub>pp</sub> when the gain is 3.52 dB; higher levels must be reduced through proper dividers.

Following the input amplifier the signal is converted into digital domain and a X filter block is programmed to equalize together with the HPX and LPX filters the frequency response. The coefficients of the X filter are programmed via the XFC command.

A gain block (GX) allows to set the transmit level in a 30 dB range, with steps <0.01 dB. This block can be programmed via the GTX command.

The needed TX gain can be set by proper programming of the GX block in combination with the TX amplifier.

Setting GTX=00h, the transmitted signal is muted and an idle PCM signal is generated on DX.

Concerning the CODING function, A/m law can be selected writing the CONF register (bit 5 AMU). In addition, via the CONF register (bit 6 LIN) the coding law can be set to linear mode (16 bits). In this case the signal sent on the DX will take two adjacent PCM channels, proper care has to be taken in the time slot selection programming (DXTS register).

The intrinsic non-programmable gain GX0 set the TX path gain to 22.07 dB. The absolute gain level (see [Chapter 9: Electrical characteristics](#)) refers to this intrinsic gain.

## 4.7 Receive path

The receive path of the STLC5048 consists of the decoder section, the gain block GR, the R filter, the channel filters (LPR, HPR) the D/A converter and the output amplifier.

Concerning the DECODING function, A/m law can be selected writing the CONF register (bit 5 AMU). In addition via the CONF register (bit 6 LIN) the coding law can be set to linear mode (16 bits).


In this case the signal received on the DR input will take two adjacent PCM channels, proper care has to be taken in the time slot selection programming (DRTS register).

The gain block GR is controlled by the GRX command allowing 30 dB gain range in 0.01 dB steps.

The R filter together the channel filters (LPR and HPR) performs the line equalization. The coefficients of the R filter are programmed via the RFC command.

The signal is converted in the analog domain and amplified by the RX amplifier that can be programmed with four different values (mute, 0 dB, -6 dB and -12 dB) by means of RXG register.

**Figure 5. Receive path**

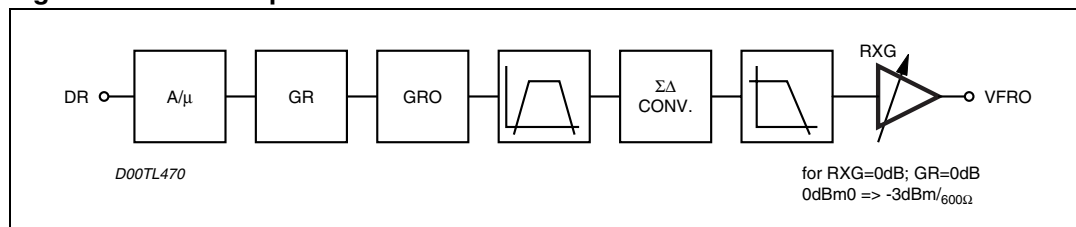



VFRO output, referred to AGND must be AC coupled to the load, referred to VSS, to prevent a DC current flow.

In order to get the best noise performances it is recommended to keep GRX value as close as possible to the maximum (FFh) setting properly the additional attenuation by means of RXG.

The intrinsic non programmable gain GR0 set the RX path gain to -3.15dB. The absolute gain level (see [Chapter 9: Electrical characteristics](#)) refers to this intrinsic gain.

## 4.8 PCM interface

The STLC5048 dedicates eight pins to the interface with the PCM highways.

MCLK represents the bit clock and is also used by the device as a source for the clock of the internal PLL.

Five possible frequencies can be used: 1.536/1.544 MHz (24-channel PCM frame); 2048 MHz (32-channel PCM frame); 4.096 MHz (64-channel PCM frame); 8.192 MHz (128 channels PCM frame). The operating frequency is automatically detected by the device the first time both MCLK and FS are applied and becomes active after the second FS period. MCLK synchronizes both the transmit data (DXA/B) and the receive data (DRA/B).

The Frame Synchronization signal FS is the common time base for all the four channels.

Transmit and receive programmable time-slots are framed by an internal synchronization signal that can be coincident with FS or delayed of 1 or 7 MCLK cycles depending on the programming of PCMSH register.

Two PCM ports are available: every channel can be connected to a different PCM port by means of PCMCOM register.

DXA/B represents the transmit PCM interface. It remains in high impedance state except during the assigned time slots during which the PCM data byte is shifted out on the rising/falling edge of MCLK according to the TE bit of PCMCOM register. The four channels can be shifted out in any possible time slot as defined by the DXTS registers. The assigned time slot (transmit and receive) takes place in the 8 MCLK cycles following the rising edge of FS.

The data can be shifted out on port A and/or B according to PCMCOM register.

If one codec is set in power down by software programming, the corresponding time slot is set in high impedance. When linear coding mode is selected by CONF register programming, the output channel will need two consecutive time slots (see [Chapter 5: Register description](#)).

DRA/B represents the receive PCM interface. It remains inactive except during the assigned time slots during which the PCM data byte is shifted in on the falling edge of MCLK. The four channels are shifted in any possible time slot as defined by the DRTS registers.

If one codec is set in power down by software programming, the corresponding time slot is not loaded and the VFRO output is kept at steady AGND level.

**Table 6. Instruction byte structure**

| First byte (address or command ID) |    |    |    |    |    |    |    | Following bytes (data) |    |    |    |    |    |    |    |
|------------------------------------|----|----|----|----|----|----|----|------------------------|----|----|----|----|----|----|----|
| 7                                  | 6  | 5  | 4  | 3  | 2  | 1  | 0  | 7                      | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| R/W                                | I6 | I5 | I4 | I3 | I2 | I1 | I0 | D7                     | D6 | D5 | D4 | D3 | D2 | D1 | D0 |

R/W=0: Write operation

R/W=1: Read operation

I6..I0: Instruction identifier: it can be a register address or a command identifier.

The number of data bytes depends on the instruction type. The first bit of a byte is the MSB, the first byte of an instruction is the LSByte.

When linear coding mode is selected by CONF register programming the input channel will need two consecutive time slots (see [Chapter 5: Register description](#)).

The data can be shifted in from port A or B according to the PCMCOM register.

TSXA/B represents the transmit time slot (open drain output, 3.2 mA). Normally it is floating in high impedance state except when a time slot is active on the DXA/B output. In this case TSXA/B output pulls low to enable the backplane line driver. Should be strapped to VSS when not used.

Finally by means of the LOOPB register it is possible to implement a digital or analog loopback on any of the selected channels.

## 4.9 MCU control interface

The MCU serial control interface consists of the following four pins:

- CCLK: control clock
- CI: serial data in
- CO: serial data out
- CS: chip select input

Control instructions require at least two bytes: however two single byte instructions are also provided.

In the multiple byte instructions the first one specifies the command or the register address and the access type (read or write).

The following bytes contain the data to be loaded into the internal RAM (on CI wire) or carry out the RAM content (on CO wire) depending on the R/W bit of the first byte. CO wire is normally in high impedance and goes to low impedance only after the first byte in case of read operation. This allows to use a common wire for both CI/CO.

CS, normally high, is set low during the transmission/reception of a byte, lasting 8 CCLK pulses. Between two consecutive access, the CS must be set high.

The CCLK can be a continuous or a gated clock.

The result of any instruction (read/write operation), if negative, can generate an interrupt (maskable). The interrupt register (INT) contains the cause information of the generated interrupt and it is cleared every time that it is read.

Depending on the instruction specified in the first byte, the STLC5048 waits a defined number of data bytes. If the STLC5048 doesn't receive the data byte within a predefined

period specified by means of T\_OUT command, an internal time out rejects the instruction. The time-out time is verified between two consecutive MCU interface access (between the falling edge of the CS and the following rising edge).

This feature is used to verify the synchronization of the MCU interface: however it can be disabled if not desired (see T\_OUT register description). To check this synchronization is provided a specific register (SYNCK) that returns always a predefined value: if the returned value is different the MCU interface is in out of sync state (the device is waiting a data byte while the MCU is writing an address or vice versa). In this case, it is possible to realign it by means of the execution of a specific single byte instruction (REACOM) from 1 to 53 times, depending on the instructions.

Every time an illegal operation (access to not allowed address, time-out violation or clock pulse different than 8 inside a CS active) is performed the MCU interface is put on an error state: to resume it from this state a single REACOM instruction can be used.

Anyway after a REACOM instruction a successful SYNC instruction guarantees the correct synchronization.

One additional wire provided to the control interface is an open drain interrupt output (INT) that goes low when a change of status is detected on the I/O pins or other interrupt source are active (see [Section 5.7: Interrupt register \(INT\)](#)). INT is automatically reset after reading of the register corresponding the cause that has generated the interrupt (see INT register description).

A particular register (COMEN) allows to enable a command on different channel at the same time. Every time a command operation is performed at least one channel must be enabled in this register.

This feature is useful when all channels must be configured in the same condition. When a command is used to perform a read operation only one channel can be enabled at the same time.

To check the configuration of the device a checksum value is provided. This value is calculated on all coefficient parameters entered (coefficients of KD, AFE\_CFF, GRX, GTX, RFC, XFC, BFC, ZFC blocks; see the CKSUM register description). Two commands are required to get this value: the first one (CKSTART) starts the internal checksum calculation, the second one (CKSUM) returns the calculated value. Between this two commands no other operation are allowed. The checksum value is available within 400us the CKSTART command.

Coefficient checksum is defined by the following algorithm:  $X^{16} + X^{12} + X^5 + 1$

This algorithm guarantees a fault coverage of  $1 - 2^{-16}$ .

## 4.10 Programming the device

After the power up, the filters and gain blocks can be programmed also with all the channels set in power down. in this case the PDR bit of the COMEN register must be set to 0.

With the proper setting of the COMEN register, the commands can be applied to more than one channel at the same time.

To read the coefficient values loaded in the RAM, only one channel per time must be enabled in the COMEN register.

## 4.11 SLIC control interface

The device provides 12 I/O pins and 4 CS signals. The interface can work in dynamic or static mode. This can be selected by means of STA bit of the CONF register:

- Dynamic mode: the I/O pins are configured as input or output by means of DIR register. The CS signals are used to select the different SLIC interface. In this case the I/O pin can be multiplexed. The data loaded from SLIC #n via I/O pins configured as input can be read in the DATAn register. The data written in a DATAn register will be loaded on the I/O pins configured as output when the CSn signal will be active.
- Static mode: The CS signal can be used as I/O pins. They can be configured as input or output I/O by means of DATA1 register. The data corresponding to the CS signal can be read or written by means of DATA2 register. All data related to the other I/O pins can be read or written by means of DATA0 register.

## 4.12 DC SLIC programmability

Three additional pins are used to select the on-hook/off-hook detection threshold and the line card limitation of the STLC3080 SLIC. This two values are programmed by ILIM and ITH registers. The programming of these two registers must be done before the filter coefficients download.

The VBG input pin must be connected to the IREF pin of the STLC3080.

When the L3235N is used in kit with STLC5048 the ILIM, ITH and VBG pin must be not connected.

## 4.13 Built-in test

By means of TONEG register it is possible to inject a tone of variable frequency (25 Hz, 1 and 3 kHz) and 0 dBm0 amplitude into the receive path, replacing any signal coming from the PCM interface. This test can be performed on every channel.

Setting the proper bit of the PCMCOM register is also possible to read/write the PCM data coming from the transmit path via the MCU interface (PCMRD/PCMWD registers). This feature can be enabled only on one channel per time.

These two features can be used to test the line interface operation.

**Table 7. Register addresses**

| Addr | Name    | Description               |
|------|---------|---------------------------|
| 00h  | DIR-L   | I/O direction (bit 7-0)   |
| 01h  | DIR-H   | I/O direction (bit 11-8)  |
| 02h  | DATA0-L | I/O data ch#0 (bit 7-0)   |
| 03h  | DATA0-H | I/O data ch #0 (bit 11-8) |
| 04h  | DATA1-L | I/O data ch#1 (bit 7-0)   |
| 05h  | DATA1-H | I/O data ch #1 (bit 11-8) |
| 06h  | DATA2-L | I/O data ch#2 (bit 7-0)   |
| 07h  | DATA2-H | I/O data ch #2 (bit 11-8) |

**Table 7. Register addresses (continued)**

| Addr | Name    | Description                        |
|------|---------|------------------------------------|
| 08h  | DATA3-L | I/O data ch#3 (bit 7-0)            |
| 09h  | DATA3-H | I/O data ch #3 (bit 11-8)          |
| 0Ah  | PCHK-A  | Persistency check time for input A |
| 0Bh  | PCHK-B  | Persistency check time for input B |
| 10h  | INT     | Interrupt register                 |
| 11h  | DMASK-L | Int. mask I/O port (03h)           |
| 12h  | DMASK-H | Int. mask I/O port (04h)           |
| 13h  | IMASK   | Interrupt mask reg.                |
| 14h  | ALARM   | Alarm register                     |
| 20h  | CONF    | Configuration register             |
| 21h  | COMEN   | Command enable reg.                |
| 23h  | SYNCCK  | Synchronous check reg.             |
| 25h  | CTRLACK | DSP status register                |
| 26h  | CKSUM-L | Checksum register L                |
| 27h  | CKSUM-H | Checksum register H                |
| 2Ah  | LOOPB   | Loopback register                  |
| 2Bh  | TXG     | Transmit preamp. gain              |
| 2Ch  | RXG     | Receive preamp. gain               |
| 2Dh  | ILIM    | SLIC line current lim.             |
| 2Eh  | ITH     | SLIC off-hook threshold            |
| 50h  | PCMSH   | PCM shift register                 |
| 51h  | PCMCOM  | PCMCOM register                    |
| 52h  | DXTS0   | Transmit time slot ch #0           |
| 53h  | DXTS1   | Transmit time slot ch #1           |
| 54h  | DXTS2   | Transmit time slot ch #2           |
| 55h  | DXTS3   | Transmit time slot ch #3           |
| 56h  | DRTS0   | Receive time slot ch #0            |
| 57h  | DRTS1   | Receive time slot ch #1            |
| 58h  | DRTS2   | Receive time slot ch #2            |
| 59h  | DRTS3   | Receive time slot ch #3            |
| 5Ah  | PCMWD-L | PCMW data register                 |
| 5Bh  | PCMWD-H | PCMW data register                 |
| 5Ch  | PCMRD-L | PCMR data register                 |
| 5Dh  | PCMRD-H | PCMR data register                 |
| 5Eh  | PCMCTRL | PCM control register               |

**Table 7. Register addresses (continued)**

| Addr | Name   | Description              |
|------|--------|--------------------------|
| 60h  | TONEG  | Tone generation reg.     |
| 61h  | COEFST | Coefficient state reg.   |
| 70h  | SWRID  | Software rev. ID code    |
| 71h  | HWRID  | Silicon revision ID code |

## 5 Register description

### 5.1 I/O direction register (DIR)

Addr=00h; reset value=00h

Addr=01h; reset value=X0h

**Table 8. I/O direction register (DIR) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| IO <sub>7</sub> | IO <sub>6</sub> | IO <sub>5</sub> | IO <sub>4</sub> | IO <sub>3</sub> | IO <sub>2</sub> | IO <sub>1</sub> | IO <sub>0</sub> |

**Table 9. I/O direction register (DIR) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3             | Bit2             | Bit1            | Bit0            |
|------|------|------|------|------------------|------------------|-----------------|-----------------|
| R/W  | 0    | 0    | 0    | 0                | 0                | 0               | 1               |
|      |      |      |      | IO <sub>11</sub> | IO <sub>10</sub> | IO <sub>9</sub> | IO <sub>8</sub> |

IO11..0=0 I/O pin 11..0 is an input, data on the I/O input is written in DATAn register bit 11..0.  
IO11..0=1 I/O pin 11..0 is an output, data contained in DATAn register bit 11..0 is transferred to the I/O output.

### 5.2 I/O data register channel #0 (DATA0)

Addr=02h; reset value=00h

Addr=03h; reset value=X0h

If bit 4 of CONF register (STA)=0 dynamic I/O mode:

**Table 10. Dynamic I/O data register channel #0 (DATA0) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 0               | 0               | 0               | 0               | 0               | 1               | 0               |
| D0 <sub>7</sub> | D0 <sub>6</sub> | D0 <sub>5</sub> | D0 <sub>4</sub> | D0 <sub>3</sub> | D0 <sub>2</sub> | D0 <sub>1</sub> | D0 <sub>0</sub> |

**Table 11. Dynamic I/O data register channel #0 (DATA0) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3             | Bit2             | Bit1            | Bit0            |
|------|------|------|------|------------------|------------------|-----------------|-----------------|
| R/W  | 0    | 0    | 0    | 0                | 0                | 1               | 1               |
|      |      |      |      | D0 <sub>11</sub> | D0 <sub>10</sub> | D0 <sub>9</sub> | D0 <sub>8</sub> |

When CS0 is active D011..0 are transferred to the corresponding I/O pins configured as outputs (see DIR register). For the I/O pins configured as inputs the corresponding D011..0 will be written by the values applied to those pins while CS0 is low.

If bit 4 of CONF register (STA)=1 static I/O mode:

**Table 12. Static I/O data register channel #0 (DATA0) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 0               | 0               | 0               | 0               | 0               | 1               | 0               |
| DS <sub>7</sub> | DS <sub>6</sub> | DS <sub>5</sub> | DS <sub>4</sub> | DS <sub>3</sub> | DS <sub>2</sub> | DS <sub>1</sub> | DS <sub>0</sub> |

**Table 13. Static I/O data register channel #0 (DATA0) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3             | Bit2             | Bit1            | Bit0            |
|------|------|------|------|------------------|------------------|-----------------|-----------------|
| R/W  | 0    | 0    | 0    | 0                | 0                | 1               | 1               |
|      |      |      |      | DS <sub>11</sub> | DS <sub>10</sub> | DS <sub>9</sub> | DS <sub>8</sub> |

DS11..0 are transferred to the corresponding I/O pins configured as outputs (see DIR register). For the I/O pins configured as inputs the corresponding DS11..0 will be written by the values applied to those pins.

### 5.3 I/O data register channel #1 (DATA1)

Addr=04h; reset value=00h

Addr=05h; reset value=X0h

If bit 4 of CONF register (STA)=0 dynamic I/O mode:

**Table 14. Dynamic I/O data register channel #1 (DATA1) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 0               | 0               | 0               | 0               | 1               | 0               | 0               |
| D1 <sub>7</sub> | D1 <sub>6</sub> | D1 <sub>5</sub> | D1 <sub>4</sub> | D1 <sub>3</sub> | D1 <sub>2</sub> | D1 <sub>1</sub> | D1 <sub>0</sub> |

**Table 15. Dynamic I/O data register channel #1 (DATA1) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3             | Bit2             | Bit1            | Bit0            |
|------|------|------|------|------------------|------------------|-----------------|-----------------|
| R/W  | 0    | 0    | 0    | 0                | 1                | 0               | 1               |
|      |      |      |      | D1 <sub>11</sub> | D1 <sub>10</sub> | D1 <sub>9</sub> | D1 <sub>8</sub> |

When  $\overline{CS1}$  is active D111..0 are transferred to the corresponding I/O pins configured as outputs (see DIR register). For the I/O pins configured as inputs the corresponding D111..0 will be written by the values applied to those pins while  $\overline{CS1}$  is low.

If bit 4 of CONF register (STA)=1 static I/O mode:

In static mode CS pins are used as additional I/O pins. The CIO0..3 bits are used to define the direction of these pins.

**Table 16. Static I/O data register channel #1 (DATA1) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3             | Bit2             | Bit1             | Bit0             |
|------|------|------|------|------------------|------------------|------------------|------------------|
| R/W  | 0    | 0    | 0    | 0                | 1                | 0                | 0                |
|      |      |      |      | CIO <sub>3</sub> | CIO <sub>2</sub> | CIO <sub>1</sub> | CIO <sub>0</sub> |



CIO0..3=0 The  $\overline{\text{CS0}}..3$  is a static input, DATA is written in DATA2 register bits 0..3.  
 CIO0..3=1 The  $\overline{\text{CS0}}..3$  is a static output, DATA is taken from DATA2 register bits 0..3.

## 5.4 I/O data register channel #2 (DATA2)

Addr=06h; reset value=00h

Addr=07h; reset value=X0h

If bit 4 of CONF register (STA)=0 dynamic I/O mode:

**Table 17. Dynamic I/O data register channel #2 (DATA2) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 0               | 0               | 0               | 0               | 1               | 1               | 0               |
| D2 <sub>7</sub> | D2 <sub>6</sub> | D2 <sub>5</sub> | D2 <sub>4</sub> | D2 <sub>3</sub> | D2 <sub>2</sub> | D2 <sub>1</sub> | D2 <sub>0</sub> |

**Table 18. Dynamic I/O data register channel #2 (DATA2) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3             | Bit2             | Bit1            | Bit0            |
|------|------|------|------|------------------|------------------|-----------------|-----------------|
| R/W  | 0    | 0    | 0    | 0                | 1                | 1               | 1               |
|      |      |      |      | D2 <sub>11</sub> | D2 <sub>10</sub> | D2 <sub>9</sub> | D2 <sub>8</sub> |

When  $\overline{\text{CS2}}$  is active D211..0 are transferred to the corresponding I/O pins configured as outputs (see DIR register). For the I/O pins configured as inputs the corresponding D211..0 will be written by the values applied to those pins while  $\overline{\text{CS2}}$  is low.

If bit 4 of CONF register (STA)=1 static I/O mode:

**Table 19. Static I/O data register channel #2 (DATA2) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3            | Bit2            | Bit1            | Bit0            |
|------|------|------|------|-----------------|-----------------|-----------------|-----------------|
| R/W  | 0    | 0    | 0    | 0               | 1               | 1               | 0               |
|      |      |      |      | CD <sub>3</sub> | CD <sub>2</sub> | CD <sub>1</sub> | CD <sub>0</sub> |

CD0..3 are transferred to the corresponding CS pin if configured as static output (see DATA1 register). For the CS pins configured as static inputs the corresponding CD0..3 will be written by the values applied to those pins.

## 5.5 I/O data register channel #3 (data3)

Addr=08h; reset value=00h

Addr=09h; reset value=X0h

Used only if bit 4 of CONF register (STA)=0; dynamic I/O mode:

**Table 20. Dynamic I/O data register channel #3 (data3) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 0               | 0               | 0               | 1               | 0               | 0               | 0               |
| D3 <sub>7</sub> | D3 <sub>6</sub> | D3 <sub>5</sub> | D3 <sub>4</sub> | D3 <sub>3</sub> | D3 <sub>2</sub> | D3 <sub>1</sub> | D3 <sub>0</sub> |

**Table 21. Dynamic I/O data register channel #3 (data3) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3             | Bit2             | Bit1            | Bit0            |
|------|------|------|------|------------------|------------------|-----------------|-----------------|
| R/W  | 0    | 0    | 0    | 1                | 0                | 0               | 1               |
|      |      |      |      | D3 <sub>11</sub> | D3 <sub>10</sub> | D3 <sub>9</sub> | D3 <sub>8</sub> |

When  $\overline{CS3}$  is active D311..0 are transferred to the corresponding I/O pins configured as outputs (see DIR register). For the I/O pins configured as inputs the corresponding D311..0 will be written by the values applied to those pins while  $\overline{CS3}$  is low.

If bit4 of CONF register (STA) = 1

Static I/O mode:

- D3<sub>3..0</sub>=1: The corresponding CSn cannot generate interrupt.
- D3<sub>3..0</sub>=0: The corresponding I/O (programmed as input) can generate interrupt if a change of status is detected.

## 5.6 Persistency check register (PCHK-A/B)

Addr=0Ah; reset value=00h

Addr=0Bh; reset value=00h

Two input signal per channel, labelled A and B, are submitted to persistency check.

In dynamic mode (STA=0), A and B inputs of the four channels are sampled on the multiplexed lines IO0 (pin 13) and IO1 (pin 14).

In static mode (STA=1) persistency check is performed on four pairs of lines, assigned to each channel according to the table:

**Table 22. A and B inputs of persistency check register in static mode**

| CHAN # | Input A                   | Input B                   |
|--------|---------------------------|---------------------------|
| 0      | IO <sub>0</sub> (pin 19)  | IO <sub>1</sub> (pin 14)  |
| 1      | IO <sub>4</sub> (pin 17)  | IO <sub>5</sub> (pin 18)  |
| 2      | IO <sub>6</sub> (pin 48)  | IO <sub>7</sub> (pin 47)  |
| 3      | IO <sub>10</sub> (pin 44) | IO <sub>11</sub> (pin 43) |

**Table 23. Persistency check register (PCHK-A/B) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 0    | 0    | 1    | 0    | 1    | 0    |
| TA7  | TA6  | TA5  | TA4  | TA3  | TA2  | TA1  | TA0  |

**Table 24. Persistency check register (PCHK-A/B) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 0    | 0    | 1    | 0    | 1    | 1    |
| TB7  | TB6  | TB5  | TB4  | TB3  | TB2  | TB1  | TB0  |

TA7..0 and TB7..0, contents of PCHKA and PCHKB registers, define the minimum duration of input A and B to generate interrupt; spurious transitions shorter than the programmed value are ignored.

The time width can be calculated according to the formula:

Time - Width A = (TA7..0)\*64μs

Time - Width B = (TB7..0)\*64μs

If PCHKA/B is programmed to 00h the persistency check is not performed and any detected transition will generate interrupt.

All the inputs, with or without persistency check, are sampled with a repetition rate of 32 μs.

## 5.7 Interrupt register (INT)

Addr=10h; reset value=00h

Read-only

**Table 25. Interrupt register (INT) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 1    | 0    | 0    | 1    | 0    | 0    | 0    | 0    |
|      | ITV  | IPCM | ICKF | ID3  | ID2  | ID1  | ID0  |

In dynamic I/O configuration the ID3..0 bits latch the interrupt request from the related channel (SLIC). Any single bit IDn is cleared after reading related I/O register or by setting MCn bit high (that is, when channel n is disabled to generate interrupt).

In static I/O configuration ID0 and ID2 bits latch the interrupt request from I/O11..0 and CS3..0 respectively:

- ID0: is set High when the interrupt is requested from any the I/O11..0 lines.
- ID2: is set High when the interrupt is requested from any the CS3..0 (configured as I/O).
- ID0 and ID2 are cleared after reading related I/O register.
- ID1 and ID3 are don't care.
- ITV = 1: If the interrupt has been generated by time-out violation on the MCU serial interface.
- IPCM = 1: When transmit PCM data reading/writing test is enabled an interrupt is generated every time valid data are available (RRD bit set to 1) or must be written (WRD bit set to 1). The interrupt is cleared after reading/writing the data in the PCMRD/PCMWD register via the MCU interface.
- ICKF = 1: If the interrupt has been generated by a clock failure on PCM port (MCLK).

The INT register is cleared after reading operation only if signals (alarm cause) are inactive.

## 5.8 Interrupt mask register for I/O port (DMASK)

Addr=11h; reset value=FFh

Addr=12h; reset value=XFh

**Table 26. Interrupt mask register for I/O port (DMASK) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 0               | 0               | 1               | 0               | 0               | 0               | 1               |
| MD <sub>7</sub> | MD <sub>6</sub> | MD <sub>5</sub> | MD <sub>4</sub> | MD <sub>3</sub> | MD <sub>2</sub> | MD <sub>1</sub> | MD <sub>0</sub> |

**Table 27. Interrupt mask register for I/O port (DMASK) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3             | Bit2             | Bit1            | Bit0            |
|------|------|------|------|------------------|------------------|-----------------|-----------------|
| R/W  | 0    | 0    | 1    | 0                | 0                | 1               | 0               |
|      |      |      |      | MD <sub>11</sub> | MD <sub>10</sub> | MD <sub>9</sub> | MD <sub>8</sub> |

- MD<sub>11..0</sub>=1: The corresponding I/O doesn't generate interrupt.
- MD<sub>11..0</sub>=0: The corresponding I/O (programmed as input) generate interrupt if a change of status is detected.

Input lines with persistency check generate interrupt if the changed status remains stable longer than the time programmed in the persistency check register PCHKA/B. Line without persistency check generate an immediate interrupt request.

Mask register has no effect on those pins configured as outputs, those pins will not generate interrupt.

## 5.9 Interrupt mask register for interrupt (IMASK)

Addr=13h; reset value=FFh

**Table 28. Interrupt mask register for interrupt (IMASK) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 0    | 1    | 0    | 0    | 1    | 1    |
| x    | MTV  | MPCM | MCF  | MC3  | MC2  | MC1  | MC0  |

For dynamic I/O configuration, MCn bits are the disable/enable interrupt related to the channel n.

- MC3..0=1: Any I/O line of the related channel #n is disabled to generate interrupt independently of DMASK setting.
- MC3..0=0: Any I/O line of the related channel #n is enabled to generate interrupt depending on DMASK setting.

For static I/O configuration, MCn bits are the interrupt mask bits related to CSn that are configured as I/O lines.

- MC0=1: The corresponding I/O cannot generate interrupt independently of DMASK setting.
- MC0=0: The corresponding I/O can generate interrupt if a change of status is detected depending of DMASK setting.
- MC2=1: The corresponding I/O cannot generate interrupt independently of DATA3\_L setting (bit 3..0).
- MC2=0: The corresponding I/O can generate interrupt if a change of status is detected depending of DATA3\_L setting (bit 3..0).

MC3 and MC1 bit are not used in static mode.

Input lines with persistency check generate interrupt if the changed status remains stable longer than the time programmed in the persistency check register PCHKA/B. Line without persistency check generate an immediate interrupt request.

Mask register has no effect on those pins configured as outputs, those pins will not generate interrupt

- MCF=1: The corresponding alarm bit (CKF) doesn't generate interrupt.
- MCF=0: The corresponding alarm bit (CKF) can generate interrupt.
- MTV=1: The corresponding alarm bit (TV) doesn't generate interrupt.
- MTV=0: The corresponding alarm bit (TV) can generate interrupt.
- MPCM =1: The IPCM interrupt is masked (generation disabled).
- MPCM =0: The IPCM interrupt is enabled (generation enabled).

## 5.10 Alarm register (ALARM)

Addr=14h; reset value=01h

Read-only

**Table 29. Alarm register (ALARM) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 1    | 0    | 0    | 1    | 0    | 1    | 0    | 0    |
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | POR  |

POR=0: No power on reset is detected during operation.

POR=1: A power on reset is detected during operation.

The ALARM register is cleared after reading operation only if signals (alarm cause) are inactive.

## 5.11 Configuration register (CONF)

Addr=20h; reset value=BFh

**Table 30. Configuration register (CONF) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 1    | 0    | 0    | 0    | 0    | 0    |
| RES  | LIN  | AMU  | STA  | PD3  | PD2  | PD1  | PD0  |

- RES=0: Normal operation
- RES=1: Device reset: I/O<sub>n</sub> and Csn are all inputs, DX is H.I. (equivalent to Hw reset).
- LIN=0: A or  $\mu$  law PCM encoding
- LIN=1: Linear encoding (16 bits), two's complement.
- AMU=0:  $\mu$  law selection (all bits inverted)
- AMU=1: A law selection (even bits inverted)
- STA=0: CS0 to CS3 scan the four SLICs connected to the I/O control port, each CS has a 31.25  $\mu$ s repetition time.
- STA=1: I/O are static, CS0 to CS3 are configured as generic static I/O.
- PD3..0=0: Codec 3..0 is active.
- PD3..0=1: Codec 3..0 is in power down. When one codec is in power down the corresponding VFRO output is set to AGND and the corresponding transmit time slot on DX is set in H.I.

## 5.12 Command enable register (COMEN)

Addr=21h; reset value=80h

**Table 31. Command enable register (COMEN) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3           | Bit2           | Bit1           | Bit0           |
|------|------|------|------|----------------|----------------|----------------|----------------|
| R/W  | 0    | 1    | 0    | 0              | 0              | 0              | 1              |
| PDR  | 0    | 0    | 0    | E <sub>3</sub> | E <sub>2</sub> | E <sub>1</sub> | E <sub>0</sub> |

The En bits enable a command on one or more channels. All enabled channels will receive the entered data. At least one channel must be enabled before every command.

- E0..3=0: commands disabled on the corresponding channel 0..3
- E0..3=1: commands enabled on the corresponding channel 0..3
- PDR = 0: RAM is enabled also in power down.
- PDR = 1: RAM is disabled in power down. In this way it's possible to reduce the power consumption in power down.

## 5.13 Synchronous check register (SYNCK)

Addr=23h; reset value=E4h

Read-only

**Table 32. Synchronous check register (SYNCK) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 1    | 0    | 1    | 0    | 0    | 0    | 1    | 1    |
| 1    | 1    | 1    | 0    | 0    | 1    | 0    | 0    |

This register contains a fixed code (E4h) that can be read to check the synchronization of the MCU interface.

## 5.14 DSP status register (CTRLACK)

Addr=25h; reset value=01h

Read-only

**Table 33. DSP status register (CTRLACK) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0  |
|------|------|------|------|------|------|------|-------|
| 1    | 0    | 1    | 0    | 0    | 1    | 0    | 1     |
| 0    | 0    | 0    | 0    | 0    | 0    | INIT | CKEND |

CKEND bit is 0 while the checksum calculation is performed: in the other time is always set to 1.

INIT bit becomes active (INIT = 1) after the DSP initialization. Normally it requires 70  $\mu$ s after the reset to be set to 1.

## 5.15 Checksum register (CKSUM)

Addr=26h; reset value=00h

Addr=27h; reset value=00h

Read-only

**Table 34. Checksum register (CKSUM) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 1               | 0               | 1               | 0               | 0               | 1               | 1               | 0               |
| CK <sub>7</sub> | CK <sub>6</sub> | CK <sub>5</sub> | CK <sub>4</sub> | CK <sub>3</sub> | CK <sub>2</sub> | CK <sub>1</sub> | CK <sub>0</sub> |

**Table 35. Checksum register (CKSUM) bits**

| Bit7             | Bit6             | Bit5             | Bit4             | Bit3             | Bit2             | Bit1            | Bit0            |
|------------------|------------------|------------------|------------------|------------------|------------------|-----------------|-----------------|
| 1                | 0                | 1                | 0                | 0                | 1                | 1               | 1               |
| CK <sub>15</sub> | CK <sub>14</sub> | CK <sub>13</sub> | CK <sub>12</sub> | CK <sub>11</sub> | CK <sub>10</sub> | CK <sub>9</sub> | CK <sub>8</sub> |

The checksum value is calculated every time the CKSTART instruction is performed and the result is available after a proper delay (max 400  $\mu$ s).

This register contains the checksum value calculated on the contents of the following coefficient (each of 16 bits):

ZERO

KDF0\_0 KDF0\_1 KDF0\_2 KDF1\_0 KDF1\_1 KDF1\_2 KDF2\_0 KDF2\_1 KDF2\_2 KDF3\_0  
KDF3\_1 KDF3\_2 AFE\_CFF GRX0 GTX0 RFC0\_0 ..... RFC0\_16 XFC0\_0 ..... XFC0\_16  
BFC0\_0 ..... BFC0\_25  
ZFC0\_0 ..... ZFC0\_4 GRX1 GTX1 RFC1\_0 ..... RFC1\_16 XFC1\_0 ..... XFC1\_16  
BFC1\_0 ..... BFC1\_25 ZFC1\_0 ..... ZFC1\_4 GRX2 GTX2 RFC2\_0 ..... RFC2\_16 XFC2\_0  
..... XFC2\_16 BFC2\_0 ..... BFC2\_25  
ZFC2\_0 ..... ZFC2\_4 GRX3 GTX3 RFC3\_0 ..... RFC3\_16 XFC3\_0 ..... XFC3\_16  
BFC3\_0 ..... BFC3\_25 ZFC3\_0 ..... ZFC3\_4

## 5.16 Loopback register (LOOPB)

Addr=2Ah; reset value=00h

**Table 36. Loopback register (LOOPB) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 1    | 0    | 1    | 0    |
| DL3  | DL2  | DL1  | DL0  | AL3  | AL2  | AL1  | AL0  |

- DL3..0=0: Normal operation
- DL3..0=1: Codec #3..0 is set in digital loopback mode, this means that the receive PCM signal applied to the programmed receive time slot is transferred to the programmed transmit time slot.
- AL3..0=0: Normal operation
- AL3..0=1: Codec #3..0 is set in analog loopback mode, this means that the VFRO signal is transferred to the VFXI input internally into the codec.

When loopbacks are enabled the signal appears also at the corresponding VFRO output. It is possible to have no signal on the VFRO output programming the GRX command to 00h in case of digital loopback.

## 5.17 Transmit pre-amplifier gain register (TXG)

Addr=2Bh; reset value=00h

**Table 37. Transmit pre-amplifier gain register (TXG) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 1    | 0    | 1    | 0    | 1    | 1    |
|      |      |      |      | TG3  | TG2  | TG1  | TG0  |

- TG3..0=0: Transmit preamplifier gain ch. 3..0 = 0dB
- TG3..0=1: Transmit preamplifier gain ch. 3..0 = 3.52dB



Overall transmit gain depends on combination of TXG and GTXn registers.

## 5.18 Receive amplifier gain register (RXG)

Addr=2Ch; reset value=00h

**Table 38. Receive amplifier gain register (RXG) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 0               | 1               | 0               | 1               | 1               | 0               | 0               |
| R3 <sub>1</sub> | R3 <sub>0</sub> | R2 <sub>1</sub> | R2 <sub>0</sub> | R1 <sub>1</sub> | R1 <sub>0</sub> | R0 <sub>1</sub> | R0 <sub>0</sub> |

- Rn<sub>0</sub>=0,Rn<sub>1</sub>=0: Receive amp. gain ch #n = mute
- Rn<sub>0</sub>=1,Rn<sub>1</sub>=0: Receive amp. gain ch #n = -12dB
- Rn<sub>0</sub>=0,Rn<sub>1</sub>=1: Receive amp. gain ch #n = -6dB
- Rn<sub>0</sub>=1,Rn<sub>1</sub>=1: Receive amp. gain ch #n = 0dB

Overall receive gain depends on the receive amplifier gain (R3..0) setting in RXG reg. and digital gain (GRXn reg. setting).

## 5.19 SLIC line current limit reg (ILIM)

Addr=2Dh; reset value=00h

**Table 39. SLIC line current limit reg (ILIM) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 1    | 0    | 1    | 1    | 0    | 1    |
| 0    | 0    | 0    | D4   | D3   | D2   | D1   | D0   |

- D4..0 = 0: Programmed value is 53
- D4..0 = 1: Programmed value is 2

The step is 1.6 mA.

This register allows to program a line current limitation from 2 to 53 mA with a step equal to 1.6 mA. These values can be obtained using an external 15 kohm resistor in kit with STLC3080.

## 5.20 SLIC off-hook threshold register (ITH)

Addr=2Eh; reset value=00h

**Table 40. SLIC off-hook threshold register (ITH) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 1    | 0    | 1    | 1    | 1    | 0    |
| 0    | 0    | 0    | En   | D3   | D2   | D1   | D0   |

- D3..0 = 0: Programmed value is 16 mA
- D3..0 = 1: Programmed value is 1 mA

The step is equal to 1 mA.

- En = 1: The DC SLIC programmability block is enabled (ITH and ILIM)
- En = 0: The DC SLIC programmability block is disabled (ITH and ILIM)

This register allows to program a threshold value from 1 to 16 mA with a step equal to 1mA. These values can be obtained using an external 12.5 kohm resistor in kit with STLC3080.

## 5.21 PCM shift register (PCMSH)

Addr=50h; reset value=00h

**Table 41. PCM shift register (PCMSH) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 0    | 0    | 0    | 0    |
|      | XS2  | XS1  | XS0  |      | RS2  | RS1  | RS0  |

- XS2..0: Effective start of the TX frame is the programmed values of clock pulses (0 to 7) after the FS rising edge.
- RS2..0: Effective start of the RX frame is the programmed values of clock pulses (0 to 7) after the FS rising edge.

## 5.22 PCM command register (PCMCOM)

Addr=51h; reset value=00h

**Table 42. PCM command register (PCMCOM) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 0    | 0    | 0    | 1    |
| RR   | WR   | PC1  | PC0  | TE   | RPAB | TPB  | TPA  |

TPA/B = These two bits are used to enable the DX outputs of the port A and/or B. According to the combination of these two bits the enabled port will be as follows:

**Table 43. PCM command register (PCMCOM) TPB and TPA bit combinations**

| TPB | TPA | Description         |
|-----|-----|---------------------|
| 0   | 0   | Both ports disabled |
| 0   | 1   | Port A enabled      |
| 1   | 0   | Port B enabled      |
| 1   | 1   | Both ports enabled  |

- RPAB = 0: Port A enabled (DRA input selected)
- RPAB = 1: Port B enabled (DRB input selected)
- TE = 0: Transmit PCM data change on rising edge of MCLK
- TE = 1: Transmit PCM data change on falling edge of MCLK
- PC1-PC0 = Selection of the channel for the PCM access data via MCU.

**Table 44. PCM command register (PCMCOM) PC0 and PC1 bit combinations**

| PC0 | PC1 | Description         |
|-----|-----|---------------------|
| 0   | 0   | Channel #0 selected |
| 1   | 0   | Channel #1 selected |
| 0   | 1   | Channel #2 selected |
| 1   | 1   | Channel #3 selected |

- WR = 1: Setting this bit, receive PCM data writing via MCU (after A/μ decoding) is enabled on selected channel and IPCM interrupt is generated every time FS signal becomes active, together to the set of the WRD bit in the PCMCTRL register.  
A data byte must be written every 125 μs, if data is not replaced the old value is inserted again but the PMW bit is set to 1 in the PCMCTRL register.
- RR = 1: Setting this bit, transmit PCM data reading (after A/μ encoding) via MCU is enabled on selected channel and IPCM interrupt is generated every time that data are available, together to the set of the RRD bit in the PCMCTRL register.  
A data byte must be read every 125 μs, if data is not read the new value is written in the PCM access register but the POW bit is set to 1 in the PCMCTRL register.

## 5.23 Transmit time slot ch #0 (DXTS0)

Addr=52h; reset value=00h

**Table 45. Transmit time slot ch #0 (DXTS0) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 0    | 0    | 1    | 0    |
| EN0  | T06  | T05  | T04  | T03  | T02  | T01  | T00  |

- EN0=0: Selected transmit time slot on DX output is in H.I.
- EN0=1: Selected transmit time slot on DX output is active carrying out the PCM encoded signal of VFXI0.
- T06..0: Define time slot number (0 to 127) on which PCM encoded signal of VFXI0 is carried out.

If linear mode is selected (LIN=1 of CONF register) the 16 bits will be carried out as follows: the 8 most significant bits in the programmed time slot, the 8 least significant bits in the following time slot.

Example: if T06..T00=00:

**Table 46. Transmit time slot ch #0 (DXTS0) time slots in linear mode**

| TS0 |    |    |    |    |    |   |   | TS1 |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|-----|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |

## 5.24 Transmit time slot ch #1 (DXTS1)

Addr=53h; reset value=00h

**Table 47. Transmit time slot ch #1 (DXTS1) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 0    | 0    | 1    | 1    |
| EN1  | T16  | T15  | T14  | T13  | T12  | T11  | T10  |

- EN1=0: Selected transmit time slot on DX output is in H.I.
- EN1=1: Selected transmit time slot on DX output is active carrying out the PCM encoded signal of VFXI1.
- T16..0: Define time slot number (0 to 127) on which PCM encoded signal of VFXI1 is carried out.

If linear mode is selected (LIN=1 of CONF register) the 16 bits will be carried out as follows: the 8 most significant bits in the programmed time slot, the 8 least significant bits in the following time slot.

Example: if T16..T10=00:

**Table 48. Transmit time slot ch #1 (DXTS1) time slots in linear mode**

| TS0 |    |    |    |    |    |   |   | TS1 |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|-----|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 6   | 5 | 4 | 3 | 7 | 2 | 1 | 0 |

## 5.25 Transmit time slot ch #2 (DXTS2)

Addr=54h; reset value=00h

**Table 49. Transmit time slot ch #2 (DXTS2) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 0    | 1    | 0    | 0    |
| EN2  | T26  | T25  | T24  | T23  | T22  | T21  | T20  |

- EN2=0: Selected transmit time slot on DX output is in H.I.
- EN2=1: Selected transmit time slot on DX output is active carrying out the PCM encoded signal of VFXI2.
- T26..0: Define time slot number (0 to 127) on which PCM encoded signal of VFXI2 is carried out.

If linear mode is selected (LIN=1 of CONF register) the 16 bits will be carried out as follows: the 8 most significant bits in the programmed time slot, the 8 least significant bits in the following time slot.

Example: if T26..T20=00:

**Table 50. Transmit time slot ch #2 (DXTS2) time slots in linear mode**

| TS0 |    |    |    |    |    |   |   | TS1 |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|-----|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 6   | 5 | 4 | 3 | 7 | 2 | 1 | 0 |

## 5.26 Transmit time slot ch #3 (DXTS3)

Addr=55h; reset value=00h

**Table 51. Transmit time slot ch #3 (DXTS3) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 0    | 1    | 0    | 1    |
| EN3  | T36  | T35  | T34  | T33  | T32  | T31  | T30  |

- EN3=0: Selected transmit time slot on DX output is in H.I.
- EN3=1: Selected transmit time slot on DX output is active carrying out the PCM encoded signal of VFXI3.
- T36..0: Define time slot number (0 to 127) on which PCM encoded signal of VFXI3 is carried out.

If linear mode is selected (LIN=1 of CONF register) the 16 bits will be carried out as follows: the 8 most significant bits in the programmed time slot, the 8 least significant bits in the following time slot.

Example: if T36..T30=00:

**Table 52. Transmit time slot ch #3 (DXTS3) time slots in linear mode**

| TS0 |    |    |    |    |    |   |   | TS1 |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|-----|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 6   | 5 | 4 | 3 | 7 | 2 | 1 | 0 |

## 5.27 Receive time slot ch #0 (DRTS0)

Addr=56h; reset value=00h

**Table 53. Receive time slot ch #0 (DRTS0) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 0    | 1    | 1    | 0    |
| EN0  | R06  | R05  | R04  | R03  | R02  | R01  | R00  |

- EN0=0: Disable reception of selected time slot.
- EN0=1: Selected receive time slot on DR input is PCM decoded and transferred to VFRO0 output.
- R06..0: Define receive time slot number (0 to 127) on carrying the PCM signal to be decoded and transferred to VFRO0 output. If linear mode is selected (LIN=1 of CONF register) the 16 bits will be used as linear code as follows: the 8 most significant bits in the programmed time slot, the 8 least significant bits in the following time slot.

Example: if R06..R00=00:

**Table 54. Receive time slot ch #0 (DRTS0) time slots in linear mode**

| TS0 |    |    |    |    |    |   |   | TS1 |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|-----|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 6   | 5 | 4 | 3 | 7 | 2 | 1 | 0 |

## 5.28 Receive time slot ch #1 (DRTS1)

Addr=57h; reset value=00h

**Table 55. Receive time slot ch #1 (DRTS1) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 0    | 1    | 1    | 1    |
| EN1  | R16  | R15  | R14  | R13  | R12  | R11  | R10  |

- EN1=0: Disable reception of selected time slot.
- EN1=1: Selected receive time slot on DR input is PCM decoded and transferred to VFRO1 output.
- R16..0: Define receive time slot number (0 to 127) on carrying the PCM signal to be decoded and transferred to VFRO1 output. If linear mode is selected (LIN=1 of CONF register) the 16 bits will be used as linear code as follows: the 8 most significant bits in the programmed time slot, the 8 least significant bits in the following time slot.

Example: if R16..R10=00:

**Table 56. Receive time slot ch #1 (DRTS1) time slots in linear mode**

| TS0 |    |    |    |    |    |   |   | TS1 |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|-----|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 6   | 5 | 4 | 3 | 7 | 2 | 1 | 0 |

## 5.29 Receive time slot ch #2 (DRTS2)

Addr=58h; reset value=00h

**Table 57. Receive time slot ch #2 (DRTS2) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 1    | 0    | 0    | 0    |
| EN2  | R26  | R25  | R24  | R23  | R22  | R21  | R20  |

- EN2=0: Disable reception of selected time slot.
- EN2=1: Selected receive time slot on DR input is PCM decoded and transferred to VFRO2 output.
- R26..0: Define receive time slot number (0 to 127) on carrying the PCM signal to be decoded and transferred to VFRO2 output.

If linear mode is selected (LIN=1 of CONF register) the 16 bits will be used as linear code as follows: the 8 most significant bits in the programmed time slot, the 8 least significant bits in the following time slot.

Example: if R26..R20=00:

**Table 58. Receive time slot ch #2 (DRTS2) time slots in linear mode**

| TS0 |    |    |    |    |    |   |   | TS1 |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|-----|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 6   | 5 | 4 | 3 | 7 | 2 | 1 | 0 |

### 5.30 Receive time slot ch #3 (DRTS3)

Addr=59h; reset value=00h

**Table 59. Receive time slot ch #3 (DRTS3) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 1    | 0    | 0    | 1    |
| EN3  | R36  | R35  | R34  | R33  | R32  | R31  | R30  |

- EN3=0: Disable reception of selected time slot.
- EN3=1: Selected receive time slot on DR input is PCM decoded and transferred to VFRO3 output.
- R36..0: Define receive time slot number (0 to 127) on carrying the PCM signal to be decoded and transferred to VFRO3 output. If linear mode is selected (LIN=1 of CONF register) the 16 bits will be used as linear code as follows: the 8 most significant bits in the programmed time slot, the 8 least significant bits in the following time slot.

Example: if R36..R30=00:

**Table 60. Receive time slot ch #3 (DRTS3) time slots in linear mode**

| TS0 |    |    |    |    |    |   |   | TS1 |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|-----|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 6   | 5 | 4 | 3 | 7 | 2 | 1 | 0 |

### 5.31 PCMW data register (PCMWd)

Addr=5Ah; reset value=00h

Addr=5Bh; reset value=00h

**Table 61. PCMW data register (PCMWd) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 1    | 0    | 1    | 0    |
| D7   | D6   | D5   | D4   | D3   | D2   | D1   | D0   |

**Table 62. PCMW data register (PCMWd) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 1    | 1    | 0    | 1    | 1    |
| D15  | D14  | D13  | D12  | D11  | D10  | D9   | D8   |

This register is used to write receive PCM data via the MCU interface. Writing this register the IPCM interrupt (if generated only by writing access) is automatically cleared.

In A/μ law only the first 8 bits are used. In linear code option both registers must be used.



### 5.32 PCMR data register (PCMRD)

Addr=5Ch; reset value=00h

Addr=5Dh; reset value=00h

Read-only

**Table 63. PCMR data register (PCMRD) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 1    | 1    | 0    | 1    | 1    | 1    | 0    | 0    |
| D7   | D6   | D5   | D4   | D3   | D2   | D1   | D0   |

**Table 64. PCMR data register (PCMRD) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 1    | 1    | 0    | 1    | 1    | 1    | 0    | 1    |
| D15  | D14  | D13  | D12  | D11  | D10  | D9   | D8   |

This register is used to read transmit PCM data via the MCU interface. Reading this register the IPCM interrupt (if generated only by reading access) is automatically cleared.

In A/μ law only the first 8 bit are used. In linear code option both registers must be read, first the LSB and after the MSB.

### 5.33 PCM control register (PCMCTRL)

Addr= 5Eh; reset value=00h

Read-only

**Table 65. PCM control register (PCMCTRL) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 1    | 1    | 0    | 1    | 1    | 1    | 1    | 0    |
|      |      |      |      | RRD  | WRD  | POW  | PMW  |

- PMW = 1: Data is not written every FS while writing PCM access data is enabled.
- POW = 1: Data is not read every FS while reading PCM access data is enabled.
- WRD = 1: Device is waiting for PCM data insertion in PCMWD register. The bit is reset after writing at least one byte.
- RRD = 1: Data are available on PCMRD register. The bit is reset after reading the two bytes of the register (first the LSB and after the MSB).

### 5.34 Tone generation register (TONEG)

Addr=60h; reset value=00h

**Table 66. Tone generation register (TONEG) bits**

| Bit7            | Bit6            | Bit5            | Bit4            | Bit3            | Bit2            | Bit1            | Bit0            |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R/W             | 1               | 1               | 0               | 0               | 0               | 0               | 0               |
| T3 <sub>1</sub> | T3 <sub>0</sub> | T2 <sub>1</sub> | T2 <sub>0</sub> | T1 <sub>1</sub> | T1 <sub>0</sub> | T0 <sub>1</sub> | T0 <sub>0</sub> |

- Tn<sub>0</sub>=0, Tn<sub>1</sub>=0: No tone is generated on ch #n
- Tn<sub>0</sub>=1, Tn<sub>1</sub>=0: A tone with 25 Hz frequency is generated on ch #n.
- Tn<sub>0</sub>=0, Tn<sub>1</sub>=1: A tone with 1 kHz frequency is generated on ch #n.
- Tn<sub>0</sub>=1, Tn<sub>1</sub>=1: A tone with 3 kHz frequency is generated on ch #n.

This register allows the generation of a tone in the RX direction.

### 5.35 Coefficient state register (COEFST)

Addr= 61h; reset value=F0h

**Table 67. Coefficient state register (COEFST) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 1    | 0    | 0    | 0    | 0    | 1    |
| FD3  | FD2  | FD1  | FD0  | FR3  | FR2  | FR1  | FR0  |

- FR0..3=1: All channel filters and gain blocks are configured as defined in the ringing state
- FR0..3=0: All channel filters and gain blocks are configured as defined with the programmed value if also the corresponding FD bit is set to 0
- FD0..3=1: All channel filters and gain blocks are configured as defined in the default state if also the corresponding FR bit is set to 0
- FD0..3=0: All channel filters and gain blocks are configured as defined with the programmed value if also the corresponding FR bit is set to 0

### 5.36 Software revision ID Code (SWRID)

Addr=70h; Read-only.

**Table 68. Software revision ID Code (SWRID) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 1    | 1    | 1    | 1    | 0    | 0    | 0    | 0    |
| 0    | 0    | 0    | 1    | 0    | 1    | 0    | 0    |

This register contains the DSP software revision code identifier.

### 5.37 Hardware revision ID code (HWRID)

Addr=71h; Read-only.

**Table 69. Hardware revision ID code (HWRID) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 1    | 1    | 1    | 1    | 0    | 0    | 0    | 1    |
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | 1    |

This register contains the silicon revision code identifier.

## 6 Single byte instruction

**Table 70. Single byte instruction**

| Name    | Description         | ID  |
|---------|---------------------|-----|
| REACOM  | Realignment command | 28h |
| CKSTART | Start checksum      | 29h |

### 6.1 Realignment command (REACOM)

This single instruction is used to realign the MCU interface in case of out of synchronization. This instruction must be executed  $N_{\max}+1$  times to be successful.

**Table 71. Realignment command (REACOM)**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 0    | 0    | 1    | 0    | 1    | 0    | 0    | 0    |

### 6.2 Start checksum calculation (CKSTART)

This single instruction is used to start the checksum calculation of the entered data used to configure the device.

**Table 72. Start checksum calculation (CKSTART)**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| 0    | 0    | 1    | 0    | 1    | 0    | 0    | 1    |

## 7 Command list

**Table 73. Command list**

| Name   | Description            | ID  |
|--------|------------------------|-----|
| BLKEN  | Block enable           | 22h |
| KDF    | KD filter              | 30h |
| AFECFF | AFE KA coefficient (*) | 31h |
| T_OUT  | Timeout value (*)      | 32h |
| GRX    | Receive gain           | 40h |
| GTX    | Transmit gain          | 41h |
| RFC    | R filter coefficient   | 42h |
| XFC    | X filter coefficient   | 43h |
| BFC    | B filter coefficient   | 44h |
| ZFC    | Z filter coefficient   | 45h |

(\*) For these two commands, the bit set in the COMEN register are not considered.

## 8 Command description

Each command is transferred on every channel that has the proper bit in the COMEN register set to 1.

### 8.1 Block enable command (BLKEN)

Reset value=00h

The command is used to enable/disable the B, Z, R and X blocks.

**Table 74. Block enable command (BLKEN) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 1    | 0    | 0    | 0    | 1    | 0    |
|      |      |      |      | XE   | RE   | ZE   | BE   |

- BE=1: The B block is equal to an open circuit
- BE=0: The B block is configured as defined in the Ringing state or with the programmed value
- ZE=1: The Z block is equal to an open circuit
- ZE=0: The Z block is configured as defined in the Ringing state or with the programmed value
- RE=1: The R block is equal to a short circuit
- RE=0: The R block is configured as defined in the Ringing state or with the programmed value
- XE=1: The X block is equal to a short circuit
- XE=0: The X block is configured as defined in the Ringing state or with the programmed value

### 8.2 KD filter (KDF)

The register is used to set the 3 coefficients (each of 16 bits) of the KD filter of the channel #n.

**Table 75. KD filter (KDF) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 1    | 1    | 0    | 0    | 0    | 0    |
|      |      |      |      |      |      |      |      |

.

.

|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|

### 8.3 AFE coefficient (AFE\_CFF)

Reset value = AA00h

**Table 76. AFE coefficient (AFE\_CFF) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 1    | 1    | 0    | 0    | 0    | 1    |
| KA31 | KA30 | KA21 | KA20 | KA11 | KA10 | KA01 | KA00 |
|      |      |      |      |      |      |      | TTX  |

KAn0, KAn1 = KA coefficient for Ch #n

According to the value of each couple of bits, the KA block is set in the following condition:

| KAn1 | KAn0 |                      |
|------|------|----------------------|
| 0    | X    | KA block disabled    |
| 1    | 0    | KA set for low gain  |
| 1    | 1    | KA set for high gain |

When the application involves also the metering pulse signal the AFE of the STLC5048 must be adapted in order to manage also this signal. For this purpose is provided the TTX bit.

- TTX = 0: the current application is not using the metering pulse signal
- TTX = 1: the current application is using the metering pulse signal

### 8.4 Timeout value (T\_OUT)

Reset value=FFFFh

**Table 77. Timeout value (T\_OUT) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 0    | 1    | 1    | 0    | 0    | 1    | 0    |
| T7   | T6   | T5   | T4   | T3   | T2   | T1   | T0   |
| T15  | T14  | T13  | T12  | T11  | T10  | T9   | T8   |

Reset value = Maximum value = FFFFh (2048  $\mu$ s)

To disable this function the T0 bit must be set to 0.

To enable this function the T0 bit must be set to 1; the time-out value is set by means of T<15..1> bits.

Time\_out = (T\_OUT[15:1]\*62.5 + 31.24) ns

The minimum step is 62.5 ns.

## 8.5 Receive gain (GRX)

**Table 78. Receive gain (GRX) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 0    | 0    | 0    | 0    | 0    |

- 00h: Stop any received signal to reach the VFRO0 analog output. In order to open the impedance synthesis feedback it's necessary to mute the RX analog amplifier, as well.
- >00h: Digital gain is inserted in the RX path equal to:  
 $20\text{Log}[\text{prog.value}/32768]$   
 The prog. value must be expressed in 16 bits signed format: maximum prog. value is equal to 7FFFh.

## 8.6 Transmit gain (GTX)

**Table 79. Transmit gain (GTX) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 0    | 0    | 0    | 0    | 1    |

- 00h: Stop any transmit signal, null level is transmitted in the corresponding time slot on DX output.
- >00h: Digital gain is inserted in the TX path equal to:  
 $20\text{Log}[\text{prog.value}/32768]$   
 The prog. value must be expressed in 16 bits signed format: maximum prog. value is equal to 7FFFh.

## 8.7 R filter coefficient (RFC)

The register is used to set the 17 coefficients (each of 16 bits) of the R filter of the channel #n.

**Table 80. R filter coefficient (RFC) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 0    | 0    | 0    | 1    | 0    |



## 8.8 X filter coefficient (XFC)

The register is used to set the 17 coefficients (each of 16 bits) of the X filter of the channel #n.

**Table 81. X filter coefficient (XFC) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 0    | 0    | 0    | 1    | 1    |

## 8.9 B filter coefficient (BFC)

The register is used to set the 26 coefficients (each of 16 bits) of the B filter of the channel #n.

**Table 82. B filter coefficient (BFC) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 0    | 0    | 1    | 0    | 0    |

## 8.10 Z filter coefficient (ZFC)

The register is used to set the 5 coefficients (each of 16 bits) of the Z filter of the channel #n.

**Table 83. Z filter coefficient (ZFC) bits**

| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|
| R/W  | 1    | 0    | 0    | 0    | 1    | 0    | 1    |

## 9 Electrical characteristics

Typical value are for 25°C and nominal supply voltage. Minimum and maximum values are guaranteed over the temperature 0-70°C range by production testing and supply voltage range shown in the operating ranges. Performances over -40 +85°C range are guaranteed by product characterization unless otherwise specified.

**Table 84. Electrical characteristics**

| Symbol                                                     | Parameter                                       | Test condition                   | Min.    | Typ.                                      | Max.   | Unit |
|------------------------------------------------------------|-------------------------------------------------|----------------------------------|---------|-------------------------------------------|--------|------|
| <b>Digital interface</b>                                   |                                                 |                                  |         |                                           |        |      |
| Vil                                                        | Input voltage low DI pins                       |                                  | 0       |                                           | 0.2Vdd | V    |
| Vih                                                        | Input voltage high DI pins                      |                                  | 0.8Vdd  |                                           | 5.5    | V    |
| Iil                                                        | Input current low DI pins                       |                                  | -10     |                                           | 10     | μA   |
| Iih                                                        | Input current high DI pins                      |                                  | -10     |                                           | 10     | μA   |
| Ci                                                         | Input capacitance (all dig. inp.)               |                                  |         | 5                                         |        | pF   |
| Vol                                                        | Output voltage low DX, TSX pins                 | Iol=3.2 mA (other pins Iol=1mA)  | 0       |                                           | 0.4    | V    |
| Voh                                                        | Output voltage high DX pin                      | Ioh=-3.2 mA (other pins Iol=1mA) | 0.85Vdd |                                           | Vdd    | V    |
| Note: all digital inputs are 5V tolerant.                  |                                                 |                                  |         |                                           |        |      |
| <b>Analog interface</b>                                    |                                                 |                                  |         |                                           |        |      |
| RIX                                                        | Transmit input amplifier input impedance (VFXI) |                                  |         | m                                         |        | MΩ   |
| ROR                                                        | Receive output impedance                        |                                  |         | 1                                         |        | W    |
| <b>Power dissipation</b>                                   |                                                 |                                  |         |                                           |        |      |
| Idd(pd)                                                    | Power down current                              |                                  |         | 10                                        | 15     | mA   |
| Idd(act)                                                   | Active current                                  |                                  |         | 55                                        | 70     | mA   |
| <b>PCM interface timing (see <a href="#">Figure 6</a>)</b> |                                                 |                                  |         |                                           |        |      |
| fMCLK                                                      | Master clock frequency                          |                                  |         | 1.536<br>1.544<br>2.048<br>4.096<br>8.192 |        | MHz  |
| Twmh                                                       | Period of MCLK high                             |                                  | 38      |                                           |        | ns   |
| Twml                                                       | Period of MCLK low                              |                                  | 38      |                                           |        | ns   |
| Trm                                                        | MCLK rise time                                  |                                  |         |                                           | 10     | ns   |
| Tfm                                                        | MCLK fall time                                  |                                  |         |                                           | 10     | ns   |

Table 84. Electrical characteristics (continued)

| Symbol                                                           | Parameter                                                                   | Test condition           | Min. | Typ. | Max. | Unit |
|------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------|------|------|------|------|
| Thbf                                                             | Hold time MCLK low to FSX/R high or low                                     |                          | 10   |      |      | ns   |
| Tsfb                                                             | Setup time FSX/R high to MCLK low                                           |                          | 10   |      |      | ns   |
| Tdmd                                                             | Delay time, MCLK high to data valid                                         |                          |      |      | 15   | ns   |
| Tdmz                                                             | Delay time from MCLK(8) low to data output disabled                         |                          | 15   |      | 40   | ns   |
| Tdfd                                                             | Delay time, FSX high to data valid if FSX rises later than MCLK rising edge |                          |      |      | 15   | ns   |
| Tdmt                                                             | Delay time, from MCLK and FSX both high to TSX low                          |                          |      |      | 20   | ns   |
| Tzmt                                                             | Delay time from MCLK(8) low to TSX disabled                                 |                          | 15   |      | 40   | ns   |
| Tsdm                                                             | Setup time, DR valid to MCLK low                                            |                          | 5    |      |      | ns   |
| Thdm                                                             | Hold time, MCLK low to DR invalid                                           |                          | 5    |      |      | ns   |
| <b>Serial control port timing (see <a href="#">Figure 7</a>)</b> |                                                                             |                          |      |      |      |      |
| fcclk                                                            | Frequency of CCLK                                                           |                          |      |      | 8    | MHz  |
| twch                                                             | Period of CCLK high                                                         | Measured from VIH to VIH | 40   |      |      | ns   |
| twcl                                                             | Period of CCLK low                                                          | Measured from VIL to VIL | 40   |      |      | ns   |
| trc                                                              | Rise time of CCLK                                                           | Measured from VIL to VIH |      |      | 20   | ns   |
| tfc                                                              | Fall time of CCLK                                                           | Measured from VIH to VIL |      |      | 20   | ns   |
| thcs                                                             | Hold time, CCLK low to CS low                                               |                          | 10   |      |      | ns   |
| thsc                                                             | Hold time, CCLK low to CS high                                              |                          | 10   |      |      | ns   |
| tssc                                                             | Setup time, CS transition to CCLK low                                       |                          | 10   |      |      | ns   |
| tdsd                                                             | Delay time, CS low to CO data valid                                         |                          |      |      | 20   | ns   |
| tcs0                                                             | CS off time                                                                 |                          | 5    |      |      | μs   |
| tsdc                                                             | Setup time, CI. data in to CCLK low                                         |                          | 10   |      |      | ns   |
| thcd                                                             | Hold time, CCLK low to CI invalid                                           |                          | 10   |      |      | ns   |
| tdcd                                                             | Delay time, CCLK low to CO data out valid                                   |                          |      |      | 30   | ns   |

Table 84. Electrical characteristics (continued)

| Symbol                                                                                                                                           | Parameter                                                                        | Test condition                                                                      | Min.                  | Typ.  | Max.                                           | Unit   |
|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------|-------|------------------------------------------------|--------|
| tddz                                                                                                                                             | Delay time, CS or CCLK9 high to CO high impedance                                | Pull up resistor = 1 kohm<br>Cload = 30 pF                                          |                       |       | 30                                             | ns     |
| <b>SLIC control interface timing (dynamic configuration; see Figure 8)</b>                                                                       |                                                                                  |                                                                                     |                       |       |                                                |        |
| Tcs                                                                                                                                              | Chip select repetition rate                                                      |                                                                                     |                       | 31.25 |                                                | μs     |
| tcswh                                                                                                                                            | Chip select pulse width                                                          |                                                                                     |                       | 3.9   |                                                | μs     |
| tdcsl                                                                                                                                            | Data out valid to CS low                                                         |                                                                                     |                       | 1.95  |                                                | ns     |
| tscsh                                                                                                                                            | Data out held after CS high                                                      |                                                                                     |                       | 1.95  |                                                | ns     |
| tscsh                                                                                                                                            | Set up time data in to CS high                                                   |                                                                                     |                       | 50    |                                                | ns     |
| thcsh                                                                                                                                            | Hold time data in to CS high                                                     |                                                                                     |                       | 10    |                                                | ns     |
| <b>Transmit transfer characteristics</b><br>(all tests are performed in absolute gain condition (TXG = GTXn = 0 dB) unless otherwise specified). |                                                                                  |                                                                                     |                       |       |                                                |        |
|                                                                                                                                                  | Absolute level at 0 dBm0 are:<br>TXG = 0dB, GTXn = 0dB                           |                                                                                     |                       | 60    |                                                | mVrms  |
| GXA                                                                                                                                              | Transmit gain absolute accuracy                                                  |                                                                                     | -0.15                 |       | 0.15                                           | dB     |
| GXAG                                                                                                                                             | Transmit gain variation with programmed gain (within 3 dB from max dig. level)   |                                                                                     | -0.2                  |       | 0.2                                            | dB     |
| GFX                                                                                                                                              | Gain variation with frequency (relative to gain at 1004 Hz); 0 dBm0 input signal | 50 Hz<br>60 Hz<br>200 Hz<br>300-3000 Hz<br>3400 Hz<br>4000 Hz<br>4600 Hz and above  | -1.8<br>-0.15<br>-0.7 |       | -20<br>-20<br>0<br>0.15<br>0<br>-14.0<br>-32.0 | dB     |
| GAXT                                                                                                                                             | Gain variation with temperature                                                  |                                                                                     | -0.10                 |       | 0.10                                           | dB     |
| GAXE                                                                                                                                             | Gain variation with supplies +/- 5%<br>0 dBm0 input signal                       |                                                                                     | -0.05                 |       | 0.05                                           | dB     |
| GTX                                                                                                                                              | Gain tracking with tone (1004 Hz Mu Law, 820 Hz A Law) <sup>(1)</sup>            | GSX = 3 to -40 dBm0<br>GSX = -40 to -50dBm0<br>GSX = -50 to -55dBm0                 | -0.2<br>-0.4<br>-1.2  |       | 0.2<br>0.4<br>1.2                              | dB     |
| QDX                                                                                                                                              | Quantization distortion with tone (1004 Hz Mu Law, 820 Hz A Law)                 | VFXI = +3 dbm0<br>VFXI = 0 to -30 dBm0<br>VFXI = -40 dBm0<br>VFXI = -50 to -55 dBm0 | 33<br>36<br>30<br>15  |       |                                                | dB     |
| NCT                                                                                                                                              | Transmit noise C message weighted (Mu and A Law)                                 |                                                                                     |                       |       | 12                                             | dBrnCo |

Table 84. Electrical characteristics (continued)

| Symbol                                                                                                                                                                                                                                                                                                                                             | Parameter                                                                              | Test condition                                                             | Min.                   | Typ. | Max.                              | Unit  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------|------------------------|------|-----------------------------------|-------|
| NPT                                                                                                                                                                                                                                                                                                                                                | Transmit noise psophometric weighted @ 0 dBr, Z <sub>adm</sub> =600 ohm <sup>(2)</sup> |                                                                            |                        |      | -68                               | dBm0p |
| DAX                                                                                                                                                                                                                                                                                                                                                | Absolute delay <sup>(3)</sup>                                                          | B = 0, Z = 0, X = R = 1                                                    | 462                    |      | 587                               | μS    |
| DPXM                                                                                                                                                                                                                                                                                                                                               | Single frequency distortion (Mu Law 0 dBm0 sinewave @ 1004 Hz)                         |                                                                            |                        |      | -46                               | dB    |
| DPXA                                                                                                                                                                                                                                                                                                                                               | Single frequency distortion (A Law 0 dBm0 sinewave @ 820 Hz)                           |                                                                            |                        |      | -46                               | dB    |
| GSPX                                                                                                                                                                                                                                                                                                                                               | Out of band spurious noise                                                             | 61 mVrms at VFXI<br>4200 Hz to 72 kHz                                      |                        |      | -39                               | dBm0  |
| 1) VFXI=106 mVrms, TXG=+3.52 dB, GTX=-8.308 dB (levels and gain condition equivalent to 0 dBr with Z <sub>adm</sub> = 600 ohm on the application)<br>2) TXG=+3.52 dB, GTX=-8.308 dB (gain condition equivalent to 0 dBr with Z <sub>adm</sub> = 600 ohm on the application)<br>3) The max value includes 125 μs for the time slot synchronization. |                                                                                        |                                                                            |                        |      |                                   |       |
| <b>Receive transfer characteristics</b>                                                                                                                                                                                                                                                                                                            |                                                                                        |                                                                            |                        |      |                                   |       |
| (all tests are performed in absolute gain condition (RXG = GRX <sub>n</sub> = 0 dB) unless otherwise specified).                                                                                                                                                                                                                                   |                                                                                        |                                                                            |                        |      |                                   |       |
|                                                                                                                                                                                                                                                                                                                                                    | Absolute levels at 0 dBm0 are:<br>RXG = 0 dB, GRX <sub>n</sub> = 0 dB                  |                                                                            |                        | 547  |                                   | mVrms |
| GRA                                                                                                                                                                                                                                                                                                                                                | Transmit gain absolute accuracy                                                        |                                                                            | -0.15                  |      | 0.15                              | dB    |
| GRAG                                                                                                                                                                                                                                                                                                                                               | Receive gain variation with programmed gain (within 3 dB from max dig. level)          |                                                                            | -0.2                   |      | 0.2                               | dB    |
| GFR                                                                                                                                                                                                                                                                                                                                                | Gain variation with frequency (relative to gain at 1004 Hz); 0 dBm0 input signal       | Below 200 Hz<br>200 Hz<br>300-3000 Hz<br>3400 Hz<br>4000 Hz                | -0.25<br>-0.15<br>-0.7 |      | 0.115<br>0.15<br>0.15<br>0<br>-14 | dB    |
| GART                                                                                                                                                                                                                                                                                                                                               | Gain variation with temperature                                                        | 0 to 70 °C                                                                 | -0.10                  |      | 0.10                              | dB    |
| GARE                                                                                                                                                                                                                                                                                                                                               | Gain variation with V <sub>cc</sub> =V <sub>dd</sub> =3.3 V +/- 5% 0 dBm0 input signal |                                                                            | -0.05                  |      | 0.05                              | dB    |
| GTR                                                                                                                                                                                                                                                                                                                                                | Gain tracking with tone (1004 Hz Mu Law, 820 Hz A Law)                                 | DR = 3 to -40 dBm0<br>DR = -40 to -50 dBm0<br>DR = -50 to -55 dBm0         | -0.2<br>-0.4<br>-1.2   |      | 0.2<br>0.4<br>1.2                 | dB    |
| QDR                                                                                                                                                                                                                                                                                                                                                | Quantization distortion with tone (1004 Hz Mu Law, 820 Hz A Law)                       | DR = 3 dBm0<br>DR = 0 to -30 dBm0<br>DR = -40 dBm0<br>DR = -50 to -55 dBm0 | 33<br>36<br>30<br>15   |      |                                   | dB    |

Table 84. Electrical characteristics (continued)

| Symbol                                                                                                                    | Parameter                                                                                                                                                                                                                                                                                                                                                                                           | Test condition                                                                                                                      | Min. | Typ. | Max.       | Unit       |
|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------|------|------------|------------|
| NCR                                                                                                                       | Receive noise C message weighted (Mu Law)                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                     |      | 8    | 11         | dBrnCo     |
| NPR                                                                                                                       | Receive noise psophometric weighted (A Law)                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                     |      |      | -79        | dBm0p      |
| DAR                                                                                                                       | Absolute delay <sup>(2)</sup>                                                                                                                                                                                                                                                                                                                                                                       | B = Z = 0, X = R = 1                                                                                                                | 325  |      | 450        | μs         |
| DPR1                                                                                                                      | Single frequency distortion (0dBm0 sinewave, 1004 Hz)                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                     |      |      | -46        | dB         |
| GSPR                                                                                                                      | Out of band spurious noise                                                                                                                                                                                                                                                                                                                                                                          | 0 dBm0 DTMF tone at DR                                                                                                              |      |      | -60        | dB         |
|                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                     | 0 dBm0 180 to 3600 Hz sinewave at DR                                                                                                |      |      | -43        | dB         |
| OBN                                                                                                                       | Out of band noise <sup>(1)</sup>                                                                                                                                                                                                                                                                                                                                                                    | Integral measure from 3.4 to 128 kHz<br>G <sub>TX</sub> = G <sub>RX</sub> = 0 dB<br>G <sub>TX</sub> = 0 dB; G <sub>RX</sub> = -7 dB |      |      | -48<br>-51 | dBm<br>dBm |
|                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                     | Spectral measure from 3.4 to 200 kHz in B/W = 30 Hz                                                                                 |      |      | -70        | dBm        |
|                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                     |      |      |            |            |
| 1) Values related to the application including the external filter on RX. The measure is referred to the signal replicas. |                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                     |      |      |            |            |
| 2) The max value includes 125 ms for the time slot synchronization.                                                       |                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                     |      |      |            |            |
| Supply rejection and crosstalk                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                     |      |      |            |            |
| PSRR                                                                                                                      | Power supply rejection ratio 1 kHz, 50 mVrms                                                                                                                                                                                                                                                                                                                                                        | 0 to 70°C                                                                                                                           | 42   | 65   |            | dB         |
| CTX-R                                                                                                                     | Transmit to receive crosstalk (input signal 200 Hz to 3450 Hz at 0 dBm0)                                                                                                                                                                                                                                                                                                                            |                                                                                                                                     |      |      | -76        | dB         |
| CTR-X                                                                                                                     | Receive to transmit crosstalk (input signal 200 Hz to 3450 Hz at 0 dBm0)                                                                                                                                                                                                                                                                                                                            |                                                                                                                                     |      |      | -76        | dB         |
| CT-ICH                                                                                                                    | Inter channel crosstalk, TX and RX direction.<br>Input 200 to 3450 Hz at 0 dBm0 at VFXI of one channel; all other VFXI inputs and all DR inputs receive idle signal. Output is measured at DX of the 3 idle channels.<br>Input of 200 to 3450 Hz at 0 dBm0 PCM at DR on one channel. All other DR inputs and all VFXI inputs receive idle signal. Output is measured at VFRO of the 3 idle channels |                                                                                                                                     |      |      | -78        | dB         |

Figure 6. PCM interface timing

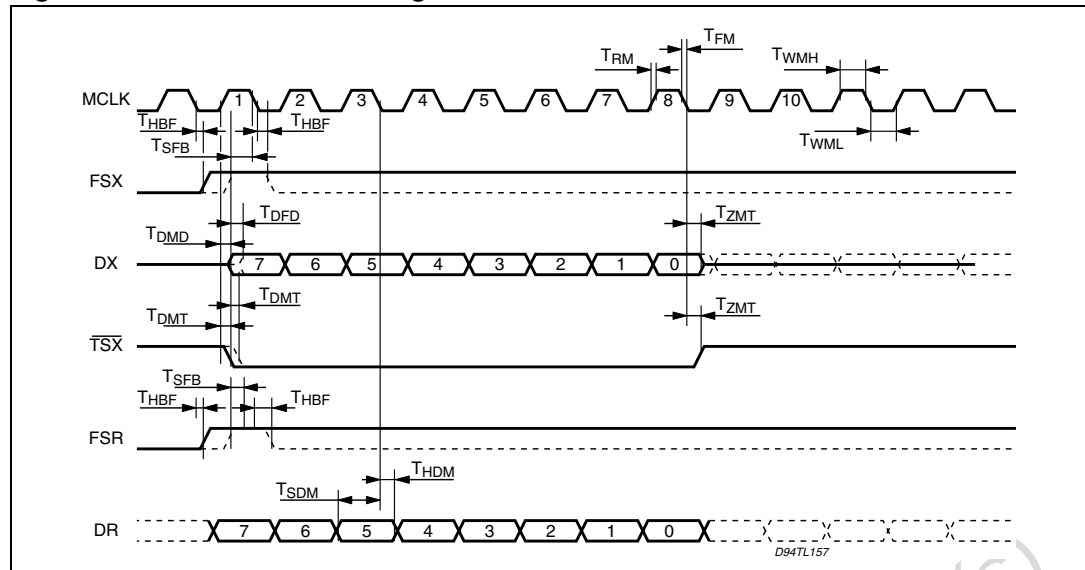


Figure 7. Serial control port timing

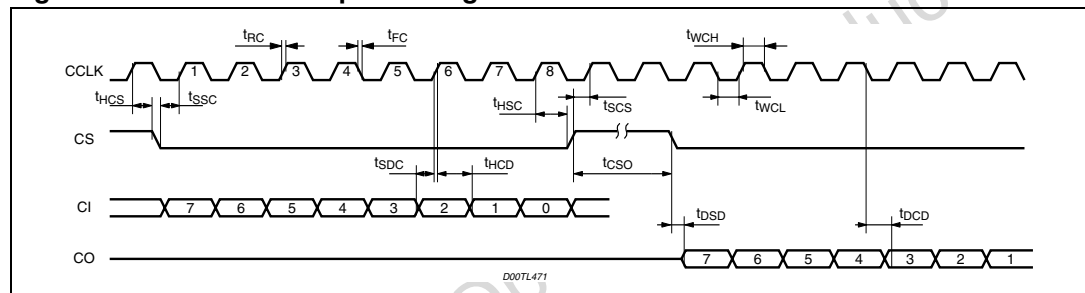


Figure 8. SLIC control port timing


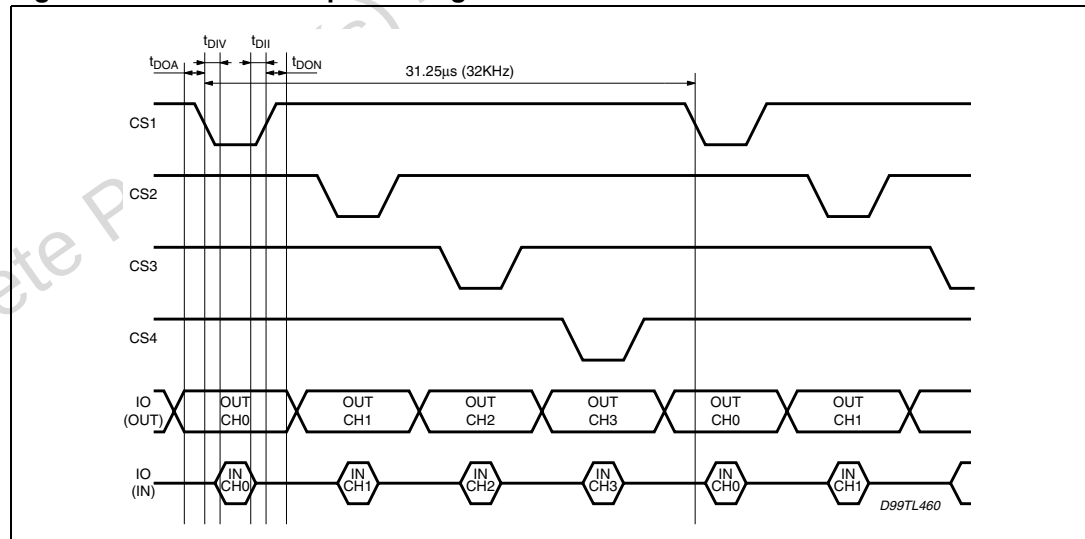


Figure 9. Group delay distortion mask



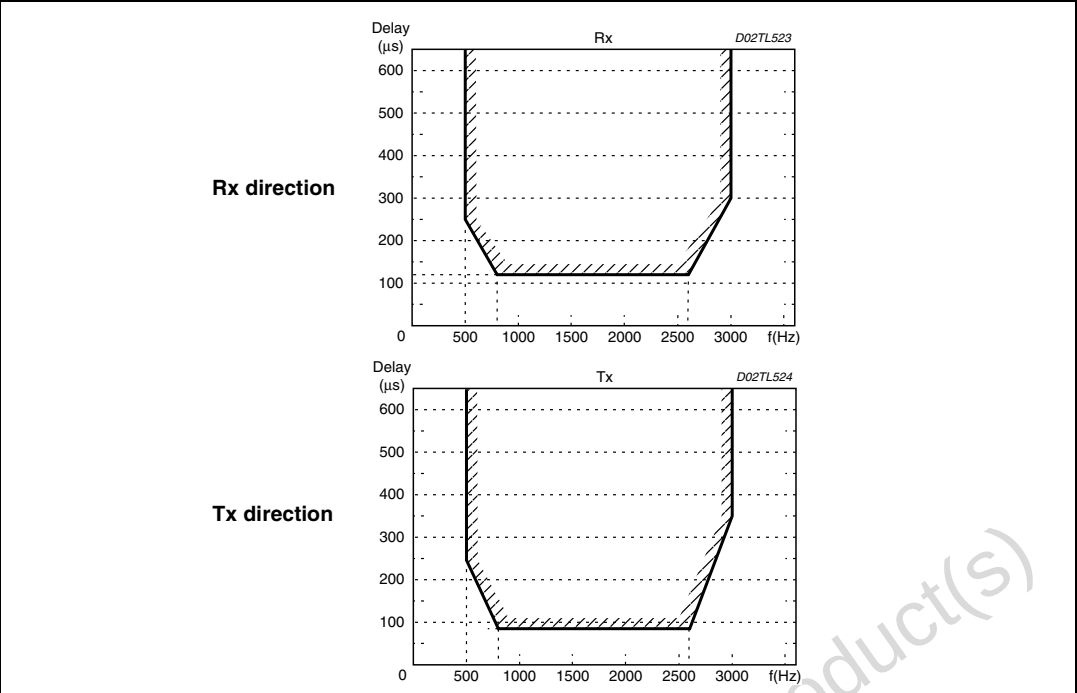


# 10 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC standard JESD97.

The maximum ratings related to soldering conditions are also marked on the inner box label.

ECOPACK is an ST trademark. ECOPACK specifications are available at [www.st.com](http://www.st.com).

Figure 10. TQFP64 mechanical data and package dimensions

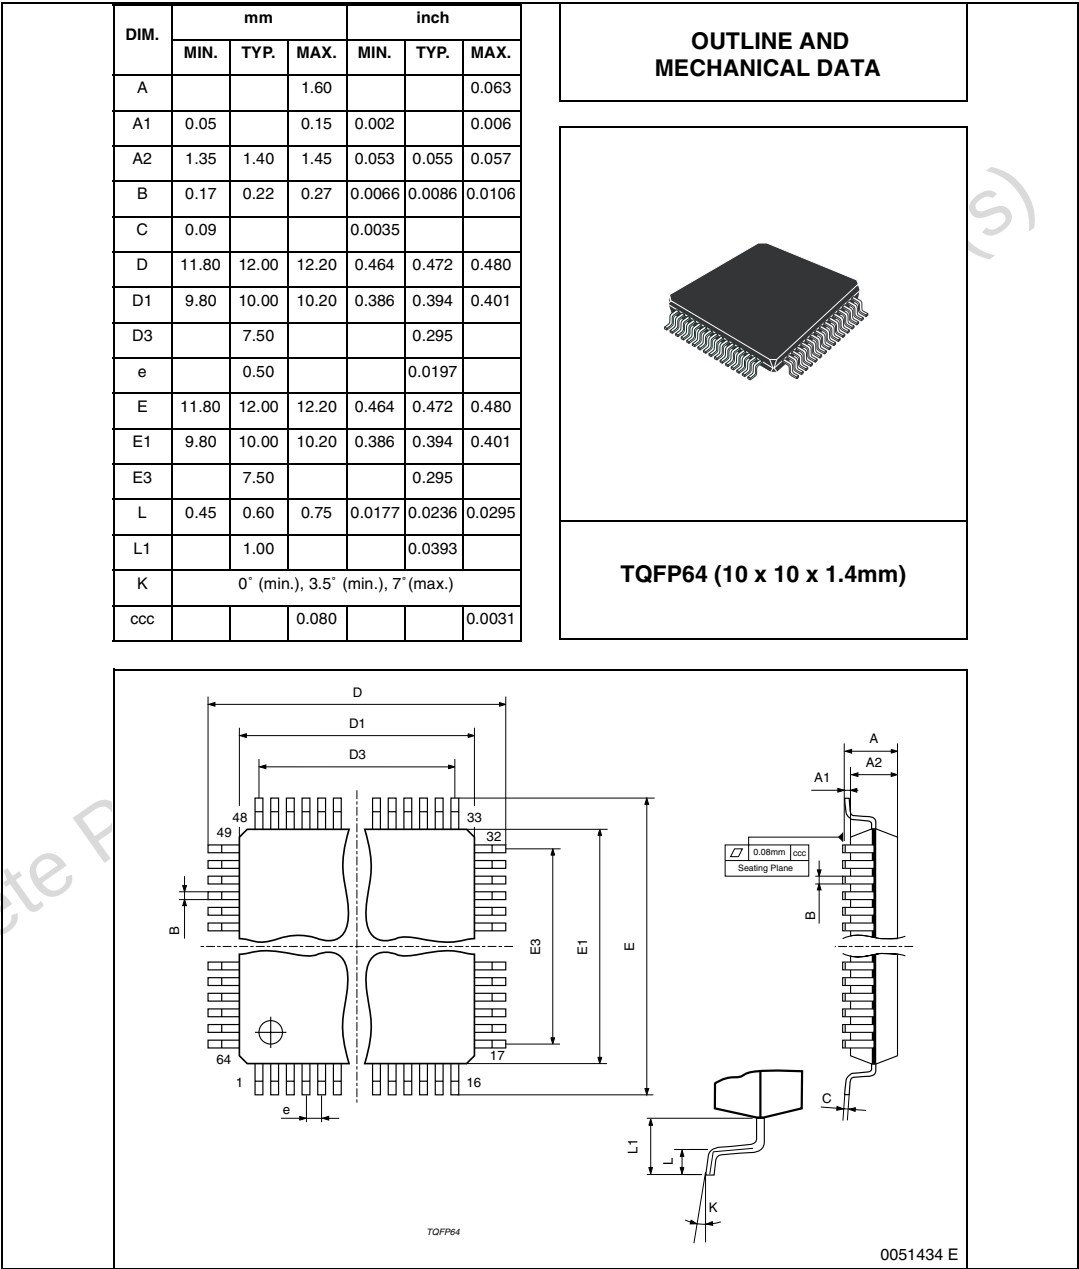

## Appendix A Absolute gains in kit with L3235N/STLC3080

Figure 11. STLC5048 in kit with STLC3080 AC application diagram


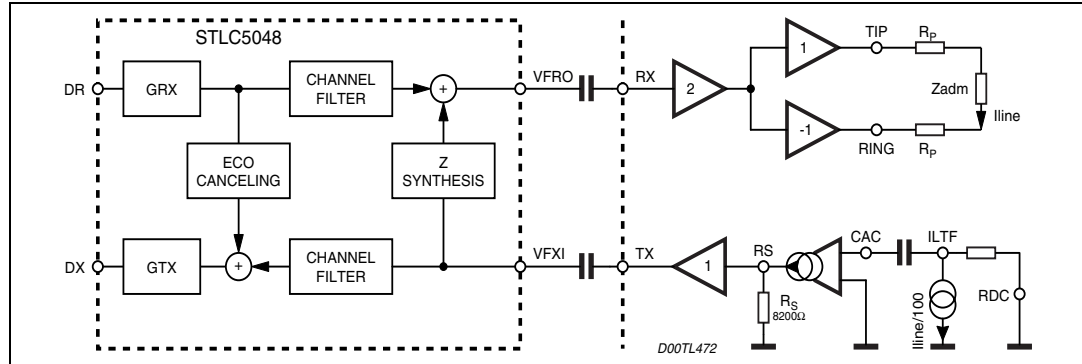


Figure 12. STLC5048 in kit with L3235N AC application diagram

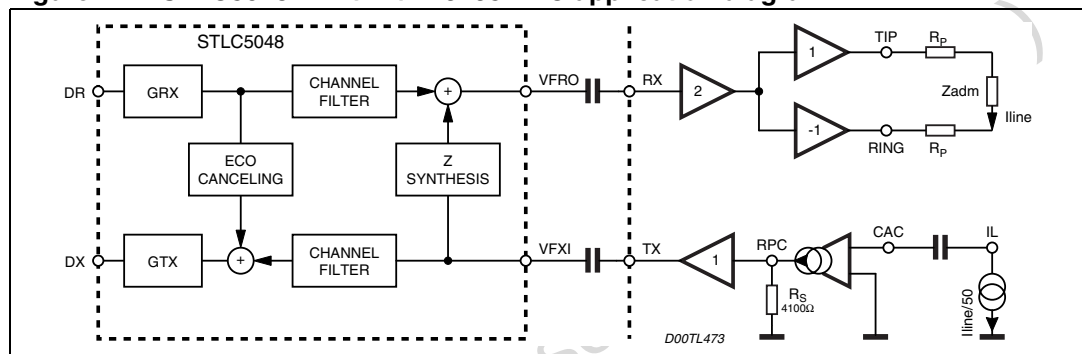

In [Figure 11](#) is shown the application diagram of the STLC5048 in kit with the STLC3080 SLIC. The figure is related to the AC path as the STLC5048 doesn't perform any DC processing.

The only DC feature performed by STLC5048 is the off-hook and limitation threshold programmability.

The same application diagram for the AC processing can be applied to the kit with the L3235N (as shown in [Figure 12](#)): the only differences are the following:

- The scaling factor of the Iline is 50.
- Rs value is 4.1 Kohm.
- The impedance synthesis is fully performed by STLC5048; the L3235N SLIC (or the STLC3080) used in kit with the STLC5048 just splits the AC/DC component of Iline, scales it and traduces it into a voltage via RS.

As shown in [Figure 12](#), the scaled current is converted into a voltage through the external resistor  $R_s = 4100 \text{ ohm}$  (8200 ohm for the STLC3080): this value is fixed (i.e. independent of the administration): the attenuation between VLINE and VFXI is dependent on the administration.

Considering the TX gain we can proceed as follows for the gain calculation:

- TXG = 0 dB
- GX = 0 dB

(As reported in the absolute gain levels with 61 Vrms at VFXI and GX=0 dB, the DX output is 0 dBm0).

For instance let's calculate which TX gain to program if +4.2 dB @ 600 ohm is to be set:  
VLIN = 0 dBm @ 600 ohm


$$VFXI = \frac{VLIN}{600} \cdot \frac{1}{50} \cdot 4100$$

In case of STLC3080 the scaling factor is 100 (instead of 50) while the Rs value is 8200 (instead of 4100) so the result is the same:

$$VFXI = \frac{VLIN}{600} \cdot \frac{1}{100} \cdot 8200$$

Referring to the first formula, to have DX equal to 4.2 dB with VLIN=0 dBm, GX must be set to GX = 4.2 - 4.78 = -0.58 dB.

**Figure 13. Absolute gain in TX path**

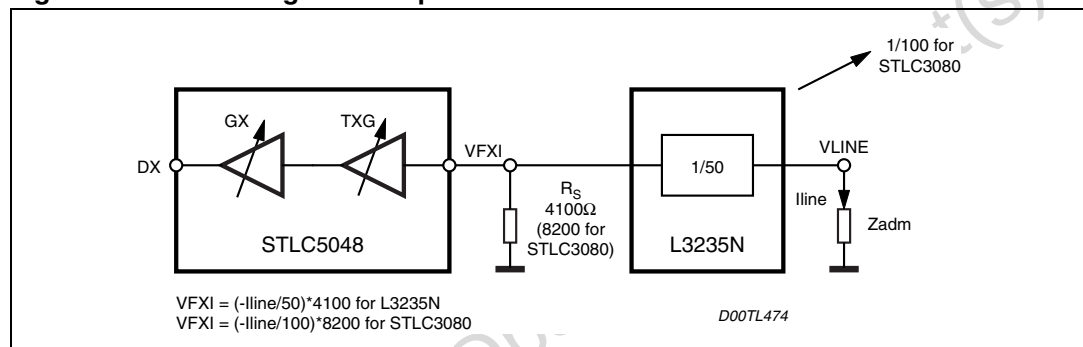

**Figure 14. STLC5048 plus L3235N/L324 kit application diagram**

**Figure 14. STLC5048 plus L3235N/L324 kit application diagram**


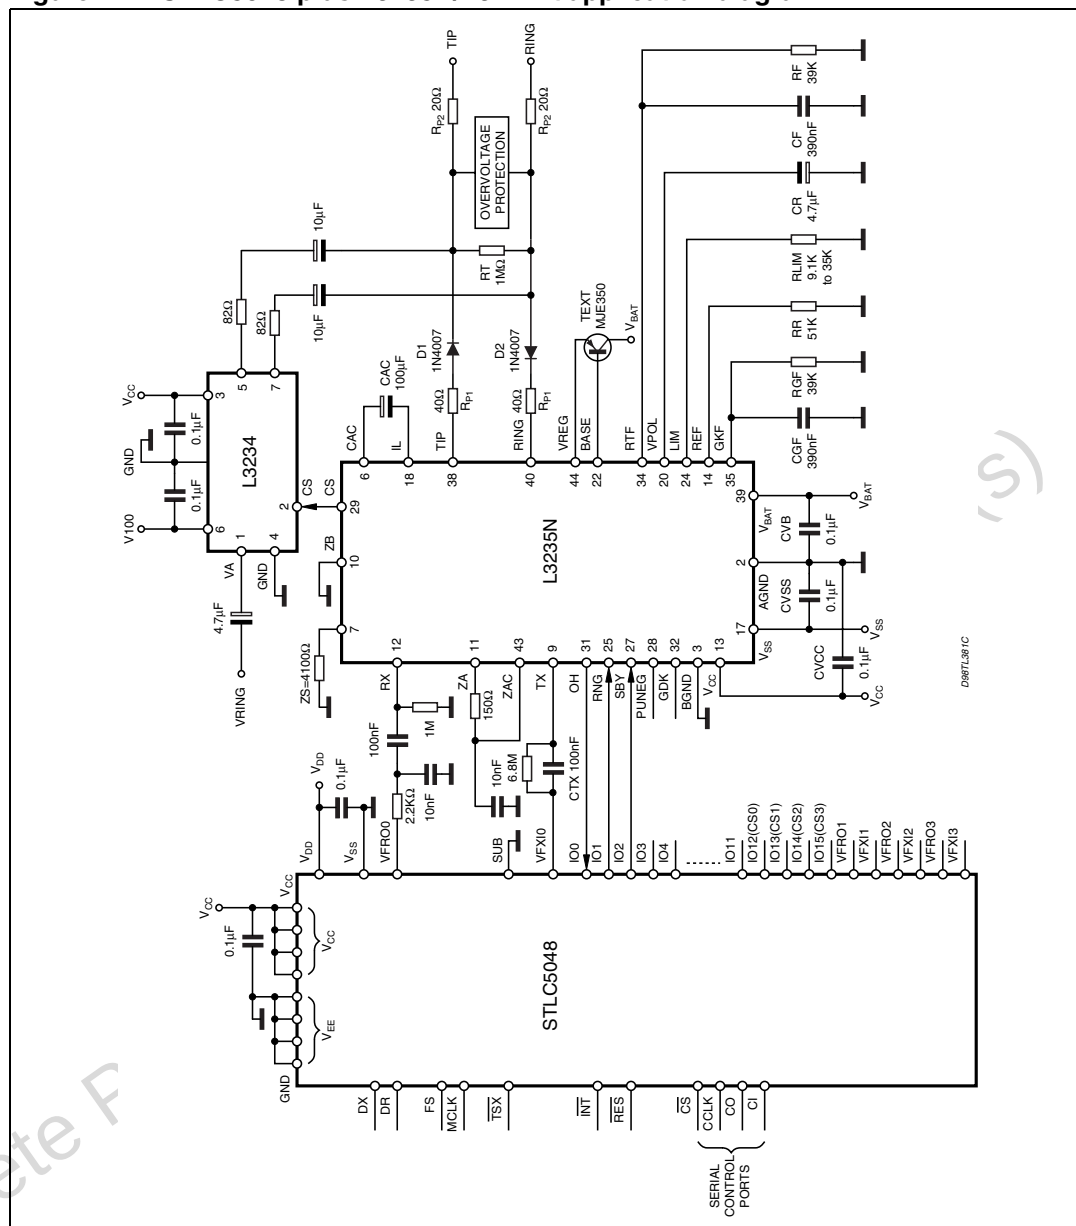


Figure 15. STLC5048 plus STLC3080 application diagram

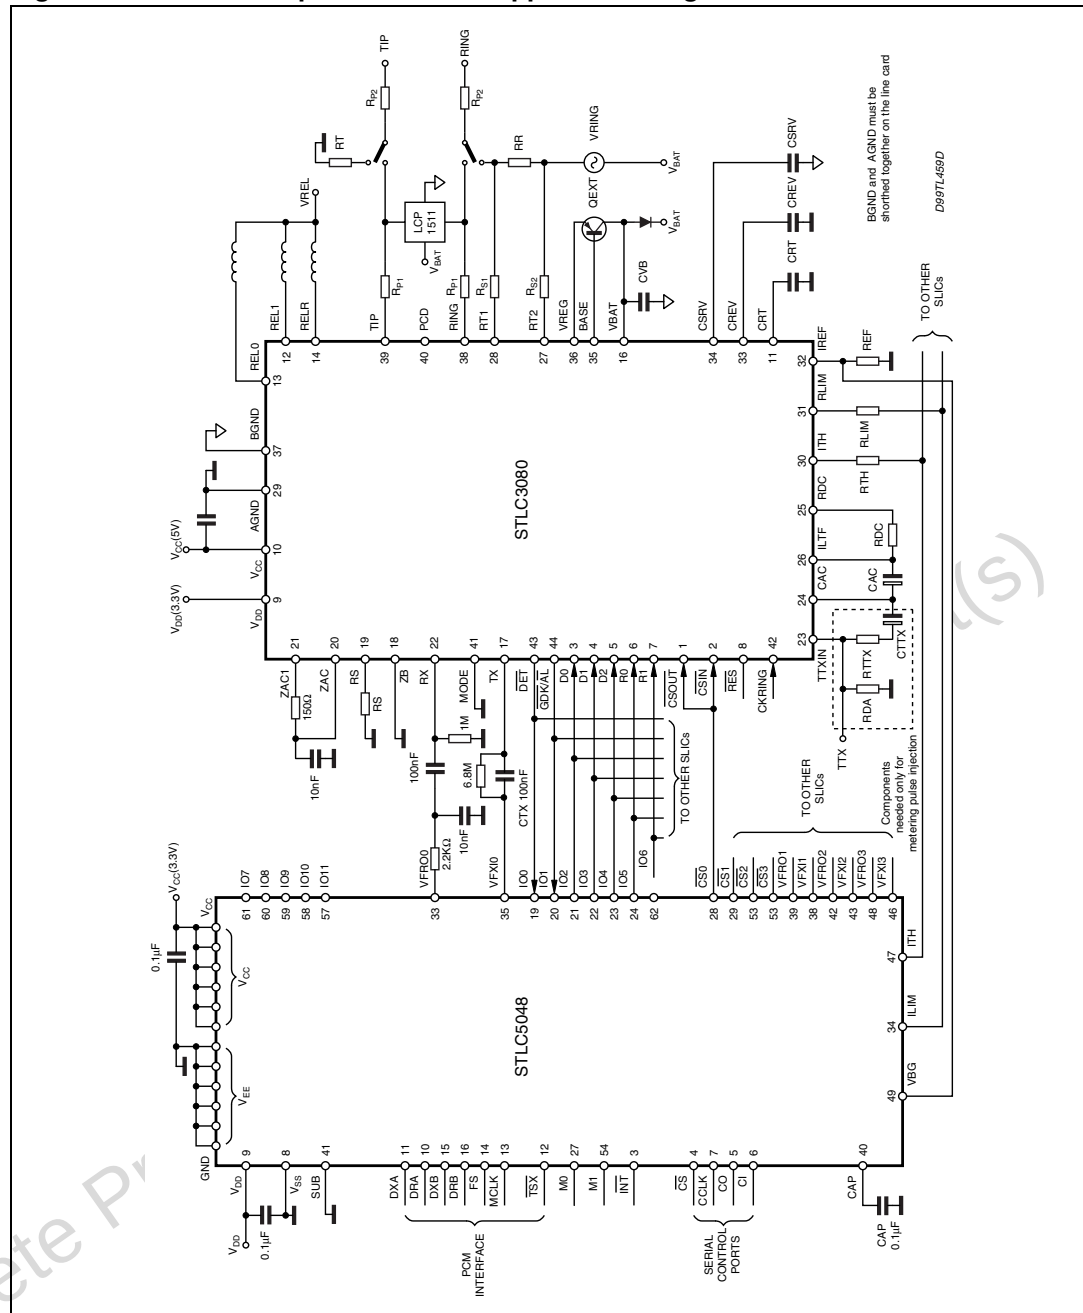

## Appendix C Power sequences

### C.1 Power-up sequence

The DSP after an HW (M1=0) or SW reset (CONF[7]=1) or a power-on reset (POR) has to perform the INIT program. To do it at least one channel must be set in active mode.

After that, (2 FS are required), the INIT bit in the CTRLACK register is set to 1 and the RAM can be written and read. It must be noted that to program the device the MCLK and FS signals must be applied to the device.

Following, the correct sequence that must be used in order to program the device.

### C.2 Power-on sequence

wait 5 FS signals for PLL locking

CONF=BF                      Sw reset enabled after reset

write CONF=3F                Sw reset disabled

write CONF=30                All channel active

wait 2 FS signals

read CTRLACK=03      Check INIT bit =1

Before to start the coefficient download, one or more channels must be selected using the COMEN register. The download can be done keeping the device in active mode (at least one channel active) or in power down mode (all channels in power down). If the second choice is selected, the PDR bit in the COMEN register must be set to 0 (internal RAM active also in power down mode).

## Ordering information

**Table 85. Order codes**

| Order codes               | Package               |
|---------------------------|-----------------------|
| E-STLC5048 <sup>(1)</sup> | TQFP64                |
| E- STLC5048TR             | TQFP64 in Tape & Reel |

1. ECOPACK® (see [10: Package mechanical data](#))

## Revision history

**Table 86. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                  |
|-------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15-Jan-2003 | 7        | First issue on www.st.com.                                                                                                                                                                               |
| 02-Apr-2005 | 8        | Changed figures 13 and 14:<br>– Figure 13 added a resistance 6.8 MΩ between pin VFXI0-STLC5048 and pin TX-L3235N<br>– Figure 14 added a resistance 6.8 MΩ between pin VFXI0-STLC5048 and pin TX-STLC3080 |
| 28-Nov-2007 | 9        | Added ECOPACK information in <a href="#">Chapter 10: Package mechanical data</a> and updated the <a href="#">Ordering information</a> .                                                                  |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)