

Technical specifications


Alkaline

EVOLTA

Panasonic Typical Dimensions



LR03

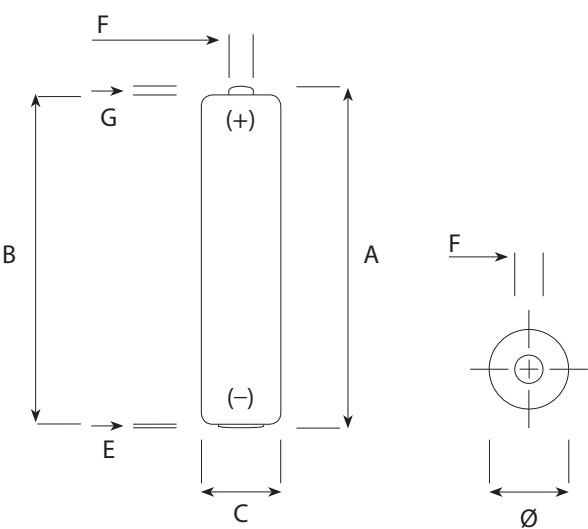






IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	44,5	
B		43,3
C		4,3
E	0,5	
F	3,8	
G		0,8
Ø	10,5	9,5

Specifications

Name	LR03 / S / AAA / AM4 / MICRO / MN2400 / 24A / 24AC
Made in	Japan
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	11 g
Storage temp. range	+10°C ~ + 25°C
Operating temp. range	-20°C ~ + 45°C
Average Impedance	130
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell

Discharged values

LR03

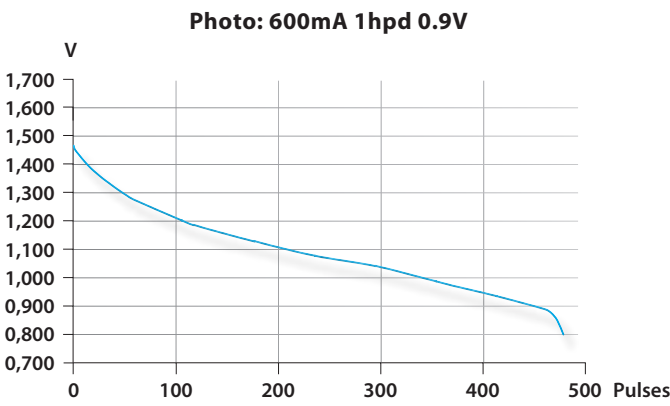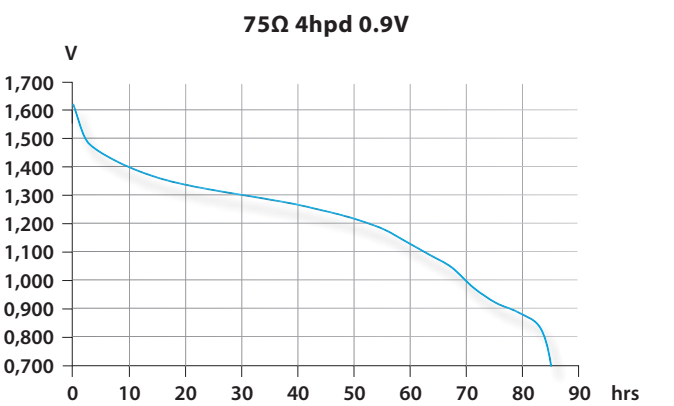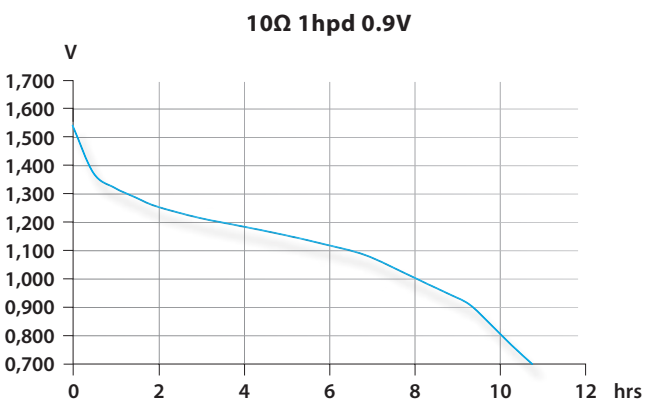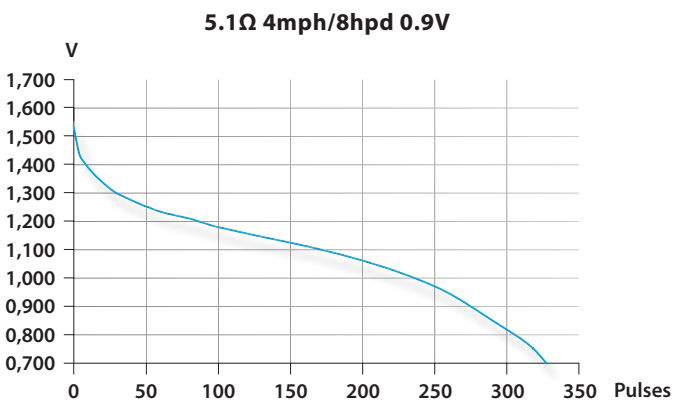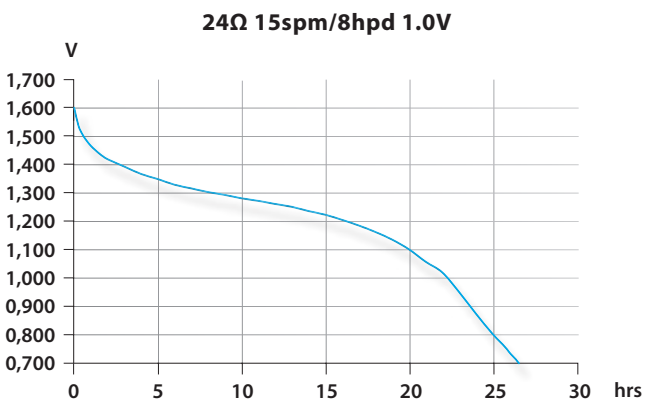

This information is generally typical and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/ specifications are subject to modification without notice. Cell/battery performance and service life depends on the operating temperature, cut-off voltage and load applied to cell/battery in a specific application. It is the responsibility of each user to ensure that each cell/battery application is adequately designed safe and compatible with all conditions encountered during use and in conformance with existing standards and requirements. Contact Panasonic for the latest information.