




## FEATURES


- Standard 2.5x2.0mm Surface Mount Footprint
- Stable Frequency Over Temperature and Drive Level
- **Fundamental Crystal Design**
- Frequency Range 16 – 54 MHz
- Frequency Tolerance,  $\pm 30$  ppm Standard ( $\pm 10$  ppm,  $\pm 15$  ppm and  $\pm 20$  ppm available)
- Frequency Stability,  $\pm 50$  ppm Standard ( $\pm 10, \pm 15, \pm 20, \pm 30$  and  $\pm 40$  ppm available)
- Operating Temperature to  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Tape & Reel Packaging, EIA-481-2 Compliant
- **RoHS/Green Compliant (6/6)**

## DESCRIPTION

The Model 425 is a ceramic packaged Crystal offering reduced size, ideal for high-density circuit board applications. The Model 425 offers reliable precision and excellent shock performance in wireless telecommunication devices.

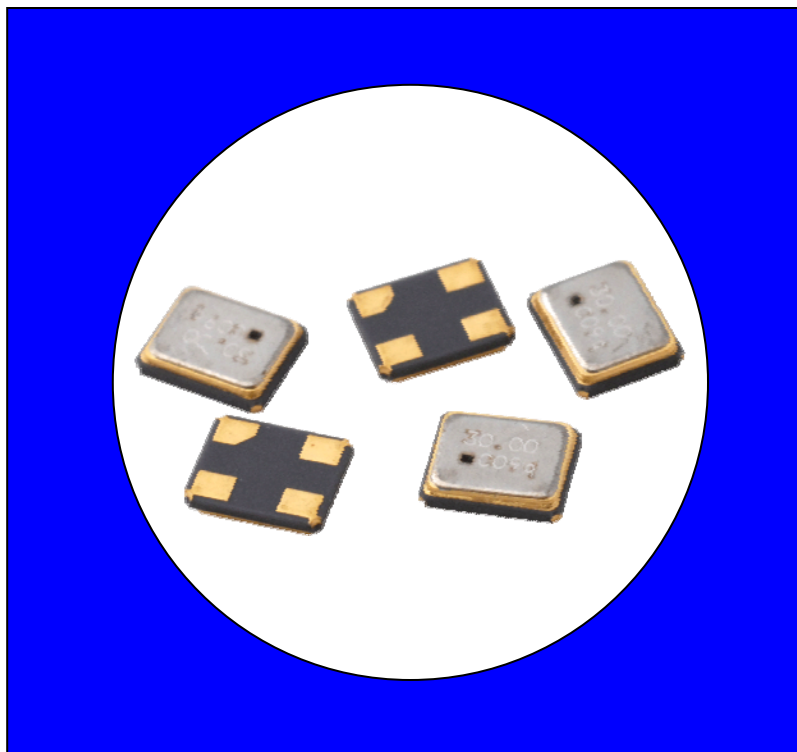

## ORDERING INFORMATION

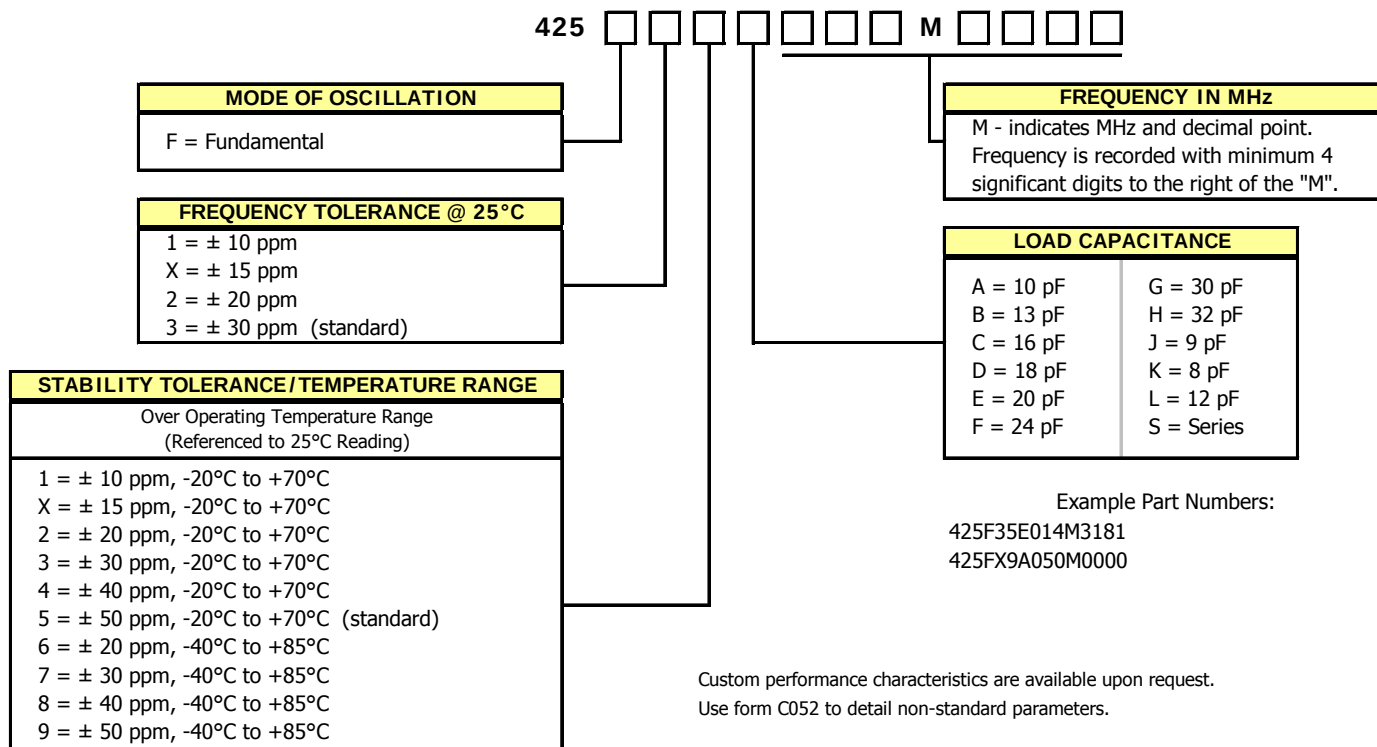

Not all performance combinations and frequencies may be available.  
Contact your local CTS Representative or CTS Customer Service for availability.

## ELECTRICAL CHARACTERISTICS


| Electrical Parameters | PARAMETER                                                                                  | VALUE                                                                               |
|-----------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       | Operating Mode                                                                             | Fundamental                                                                         |
|                       | Crystal Cut                                                                                | AT-Cut                                                                              |
|                       | Frequency Range                                                                            | 16.0 MHz to 54.0 MHz                                                                |
|                       | Frequency Tolerance @ 25°C                                                                 | ± 30 ppm Standard<br>(± 10 ppm, ±15 ppm and ± 20 ppm Available)                     |
|                       | Frequency Stability Tolerance<br>(Operating Temperature Range, Referenced to 25°C Reading) | ± 50 ppm Standard<br>(± 10 ppm, ±15 ppm, ± 20 ppm, ± 30 ppm and ± 40 ppm Available) |
|                       | Operating Temperature Range                                                                | -20°C to +70°C Standard<br>(-40°C to +85°C Available)                               |
|                       | Storage Temperature Range                                                                  | -40°C to +85°C                                                                      |
|                       | Equivalent Series Resistance                                                               | See ESR Table                                                                       |
|                       | Load Capacitance or Resonance Mode                                                         | See Ordering Information                                                            |
|                       | Shunt Capacitance ( $C_0$ )                                                                | 5.0 pF Maximum                                                                      |
|                       | Drive Level                                                                                | 10 $\mu$ W Typical, 100 $\mu$ W Maximum                                             |
|                       | Aging @ 25°C                                                                               | ± 3 ppm/year maximum                                                                |
|                       | Reflow Condition, per JEDEC J-STD-020                                                      | +255°C ± 5°C, 10 Seconds Maximum                                                    |

## EQUIVALENT SERIES RESISTANCE TABLE

| FREQUENCY RANGE        | MODE of OSCILLATION | ESR Maximum |
|------------------------|---------------------|-------------|
| 16.00 MHz - 19.999 MHz | Fundamental         | 100 Ohms    |
| 20.00 MHz - 29.999 MHz | Fundamental         | 80 Ohms     |
| 30.00 MHz - 39.999 MHz | Fundamental         | 80 Ohms     |
| 40.00 MHz - 54.000 MHz | Fundamental         | 60 Ohms     |

## MECHANICAL SPECIFICATIONS

### PACKAGE DRAWING

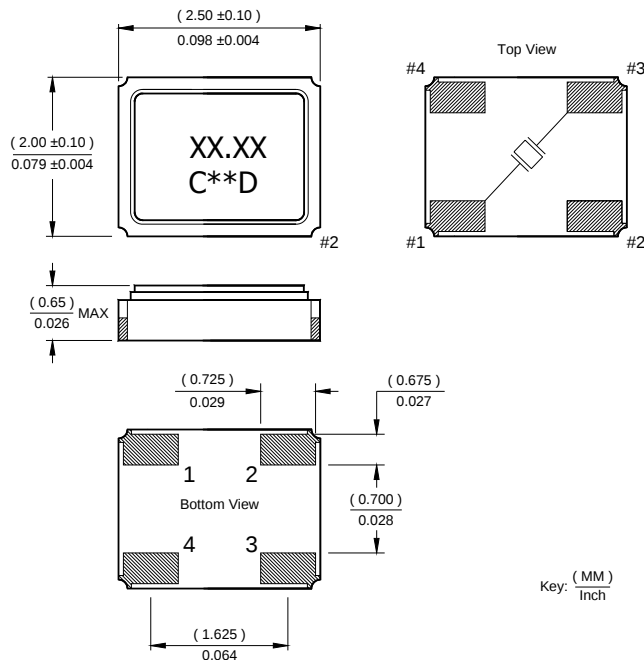

### Notes:

- Termination pads (e4), barrier-plating is nickel (Ni) with gold (Au) flash plate.
- Terminations #2, #4 and the metal lid are connected internally.  
End user may connect these pins to circuit ground.

### MARKING INFORMATION

- XX.XX – Frequency in MHz.
- C – CTS and Pin 1 identifier.
- \*\* – Manufacturing Site Code.
- D – Manufactured Date Code. See Table I for codes.
- Complete CTS part number, frequency value and date code information must appear on reel and box labels.

### SUGGESTED SOLDER PAD GEOMETRY


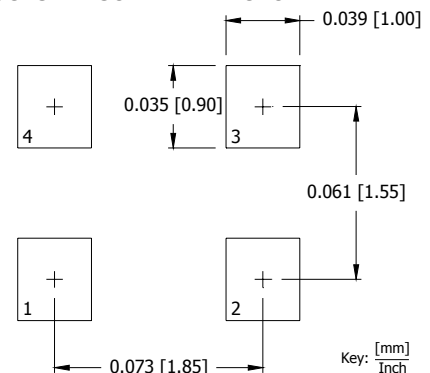


TABLE I

| YEAR \ MONTH |      |      |      |      | JAN | FEB | MAR | APR | MAY | JUN | JUL | AUG | SEP | OCT | NOV | DEC |
|--------------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 2001         | 2005 | 2009 | 2013 | 2017 | A   | B   | C   | D   | E   | F   | G   | H   | J   | K   | L   | M   |
| 2002         | 2006 | 2010 | 2014 | 2018 | N   | P   | Q   | R   | S   | T   | U   | V   | W   | X   | Y   | Z   |
| 2003         | 2007 | 2011 | 2015 | 2019 | a   | b   | c   | d   | e   | f   | g   | h   | j   | k   | l   | m   |
| 2004         | 2008 | 2012 | 2016 | 2020 | n   | p   | q   | r   | s   | t   | u   | v   | w   | x   | y   | z   |

## TAPE AND REEL INFORMATION

DIMENSIONS IN MILLIMETERS

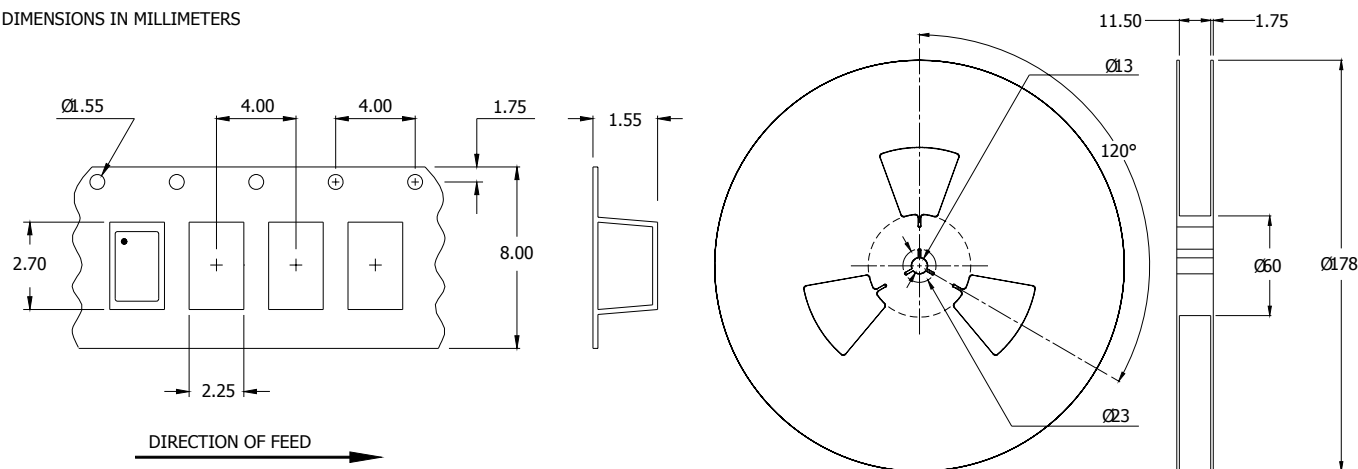

Device quantity is 3,000 pieces minimum per 178mm reel.

## ENVIRONMENTAL SPECIFICATIONS

|                                  |                                                                                                                                                     |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature Cycle:               | 400 cycles from $-55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ , 10 minute dwell at each temperature, 1 minute transfer time between temperatures. |
| Mechanical Shock:                | 1,500g's, 0.5mS duration, $\frac{1}{2}$ sinewave, 3 shocks each direction along 3 mutually perpendicular planes (18 total shocks).                  |
| Sinusoidal Vibration:            | 0.06 inches double amplitude, 10 to 55 Hz and 20g's, 55 to 2,000 Hz, 3 cycles each in 3 mutually perpendicular planes (9 times total).              |
| Gross Leak:                      | No leak shall appear while immersed in an FC40 or equivalent liquid at $+125^{\circ}\text{C}$ for 20 seconds.                                       |
| Fine Leak:                       | Mass spectrometer leak rates less than $2 \times 10^{-8}$ ATM cc/sec air equivalent.                                                                |
| Resistance to Solder Heat:       | Product must survive 3 reflows of $+260^{\circ}\text{C}$ peak, 10 seconds maximum.                                                                  |
| High Temperature Operating Bias: | 2,000 hours at $+125^{\circ}\text{C}$ , disregarding frequency shift.                                                                               |
| Frequency Aging:                 | 1,000 hours at $+85^{\circ}\text{C}$ , maximum $\pm 5$ ppm shift.                                                                                   |
| Insulation Resistance:           | 500M Ohms @ $100\text{V}_{\text{DC}} \pm 15\text{V}_{\text{DC}}$ .                                                                                  |
| Moisture Sensitivity Level:      | Level 1 per JEDEC J-STD-020.                                                                                                                        |