


# SPECIFICATION CONTROL DRAWING

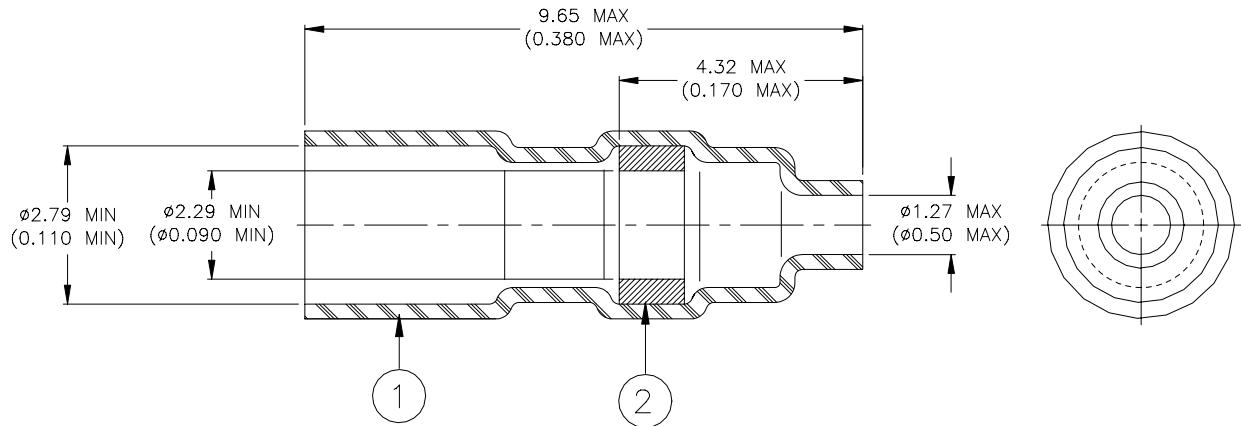

## MATERIALS

1. INSULATION SLEEVE: Heat shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
  - SOLDER: TYPE Sn63 per ANSI J-STD-006.
  - FLUX: TYPE ROL1 per ANSI J-STD-004.

## APPLICATION

1. This sleeve is designed to terminate wire combinations from a single 26 AWG to 20 AWG wires to a 0.64 x 0.64 x 8.00 (0.025 x 0.025 x 0.315) pin.
2. Sleeve will recover to 1.27 (0.050) I.D. max.

<b>Raychem Interconnect</b> <small>a division of  ELECTRONICS</small> 300 Constitution Drive Menlo Park, CA 94025, USA		<b>THERMOFIT DEVICES</b>	<b>TITLE:</b> <b>SOLDERSLEEVE, PCB THROUGH TERMINALS (Shortened D-141-24)</b>			
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.</small>				<b>DOCUMENT NO.: D-141-35</b>		
<small>TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A</small>	<small>ANGLES: N/A ROUGHNESS IN MICRON</small>	<small>Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.</small>		<small>DCR NUMBER: D001306</small>	<small>REPLACES: N/A</small>	
<small>DRAWN BY: M. FORONDA</small>	<small>DATE: 05-Dec-00</small>	<small>PROD. REV. C</small>	<small>DOC ISSUE: 1</small>	<small>SCALE: None</small>	<small>SIZE: A</small>	<small>SHEET: 1 of 1</small>

If this document is printed it becomes uncontrolled. Check for the latest revision.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-141-35](#)