
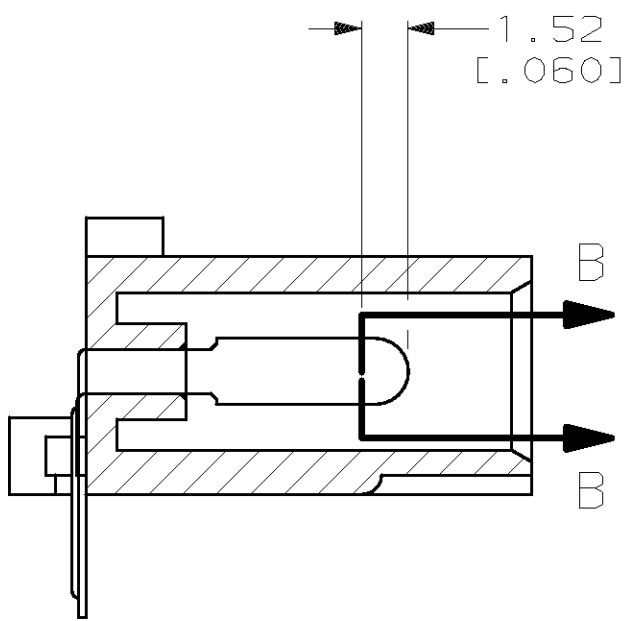
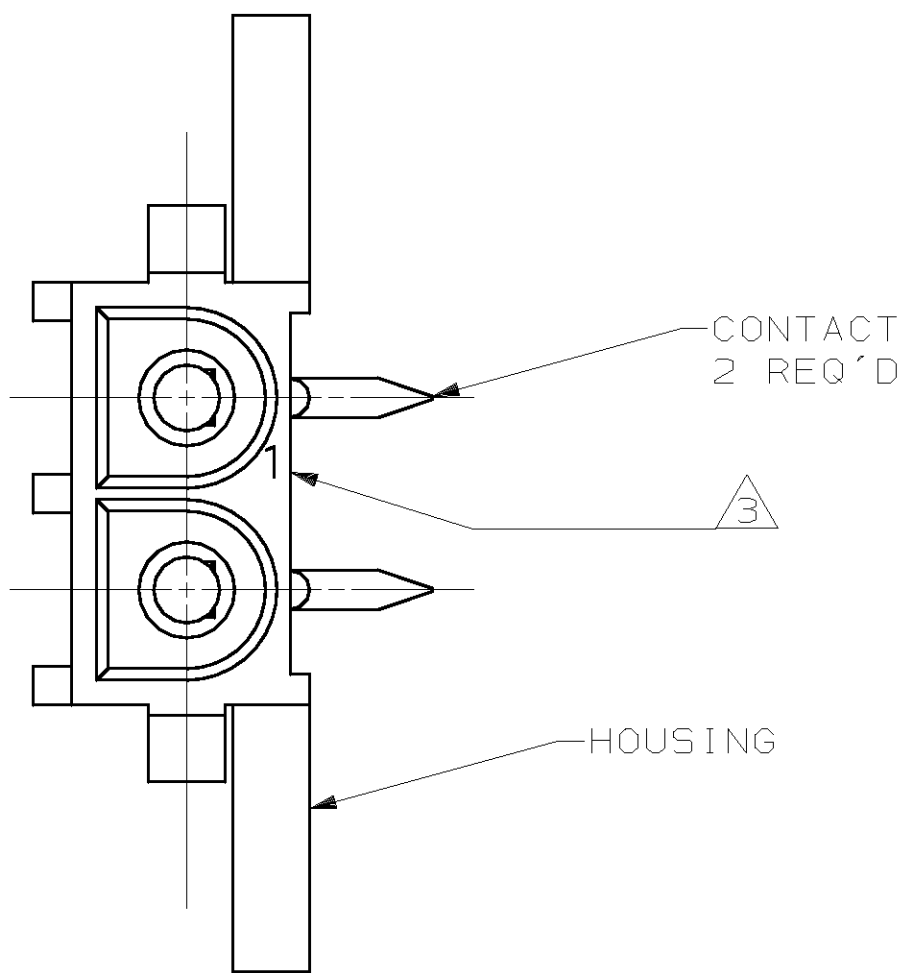
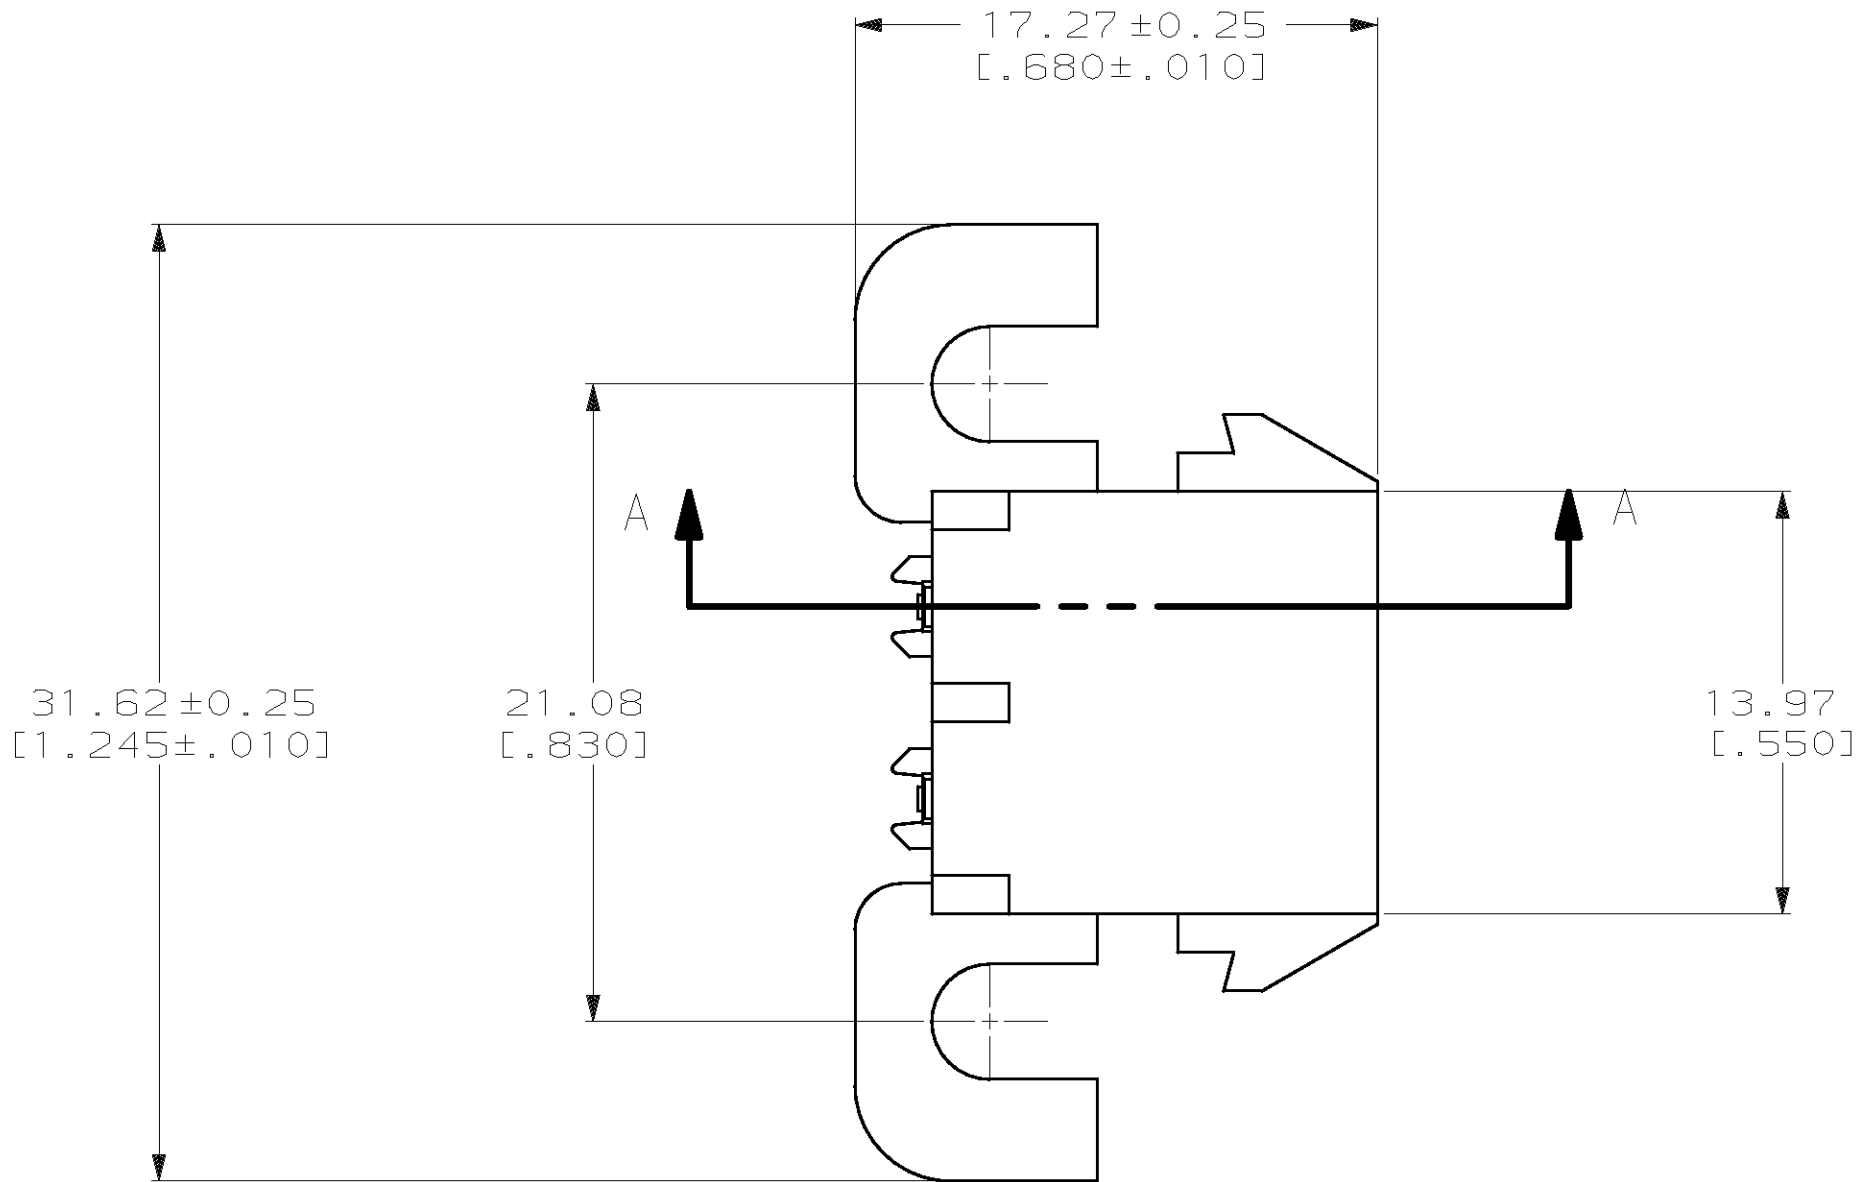



LOC		DIST	P	F	ZONE	LTR	REVISIONS		
CM		53					DESCRIPTION	DATE	APPD
						C	REV PER EC 061B-0127-98	6-24-98	BL R5

1. PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
2. DIMENSIONS IN BRACKETS ARE IN INCHES.


3. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

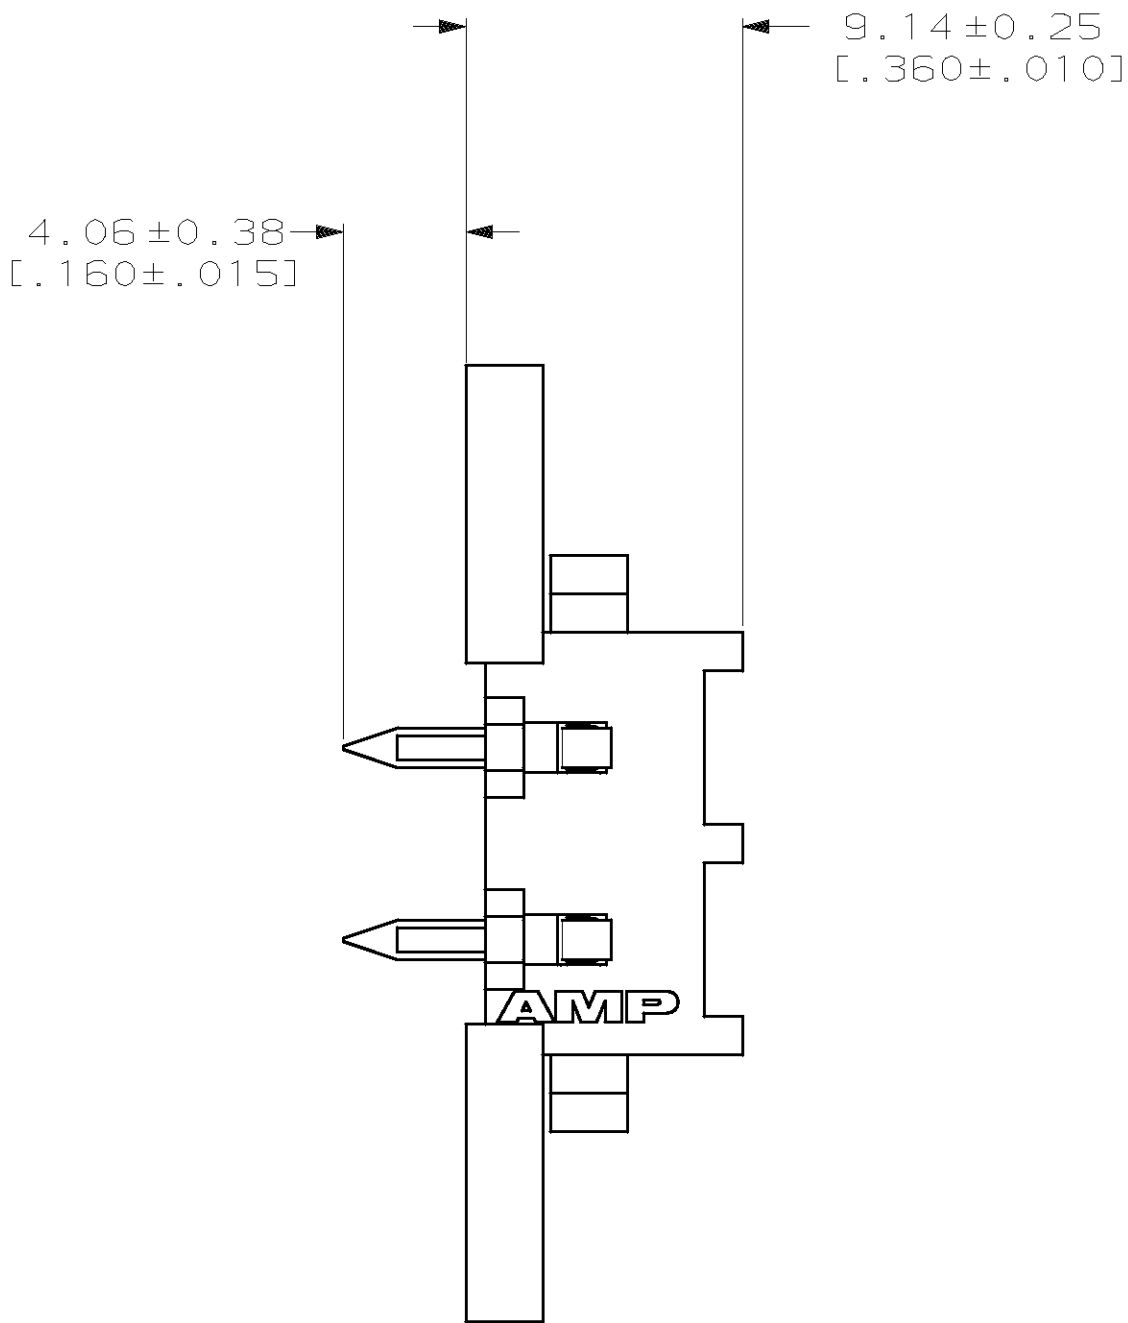


SECTION A-A

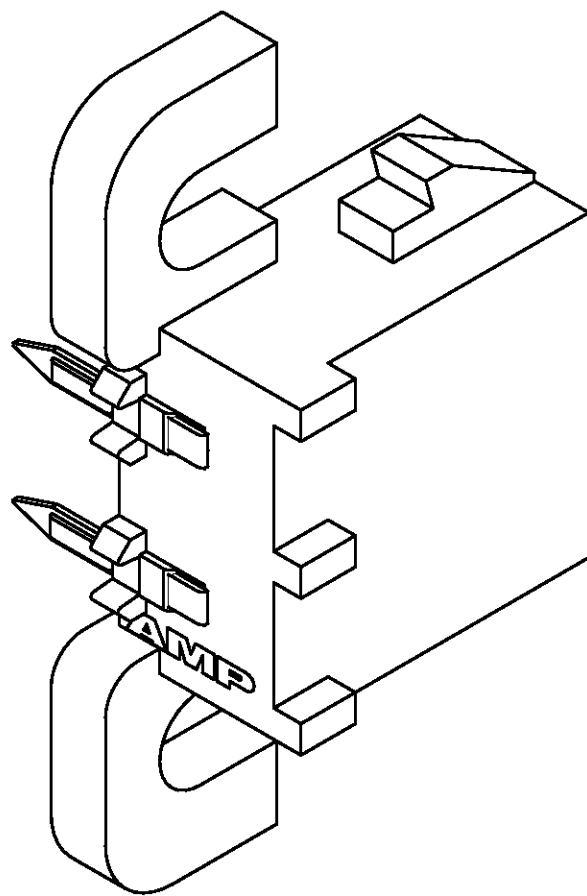

3-DIMENSIONAL MODEL
NTS

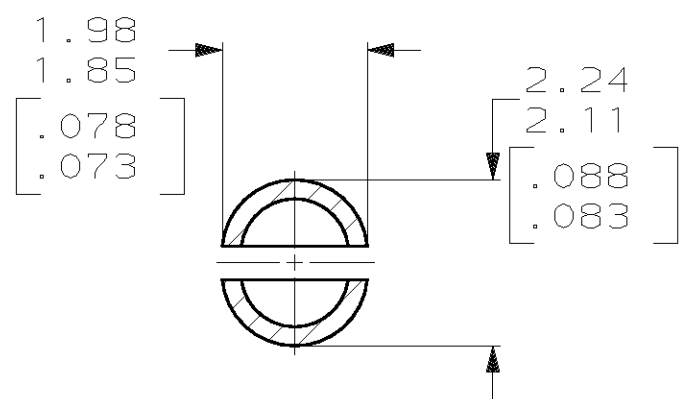

SECTION B-B
SCALE 10:1

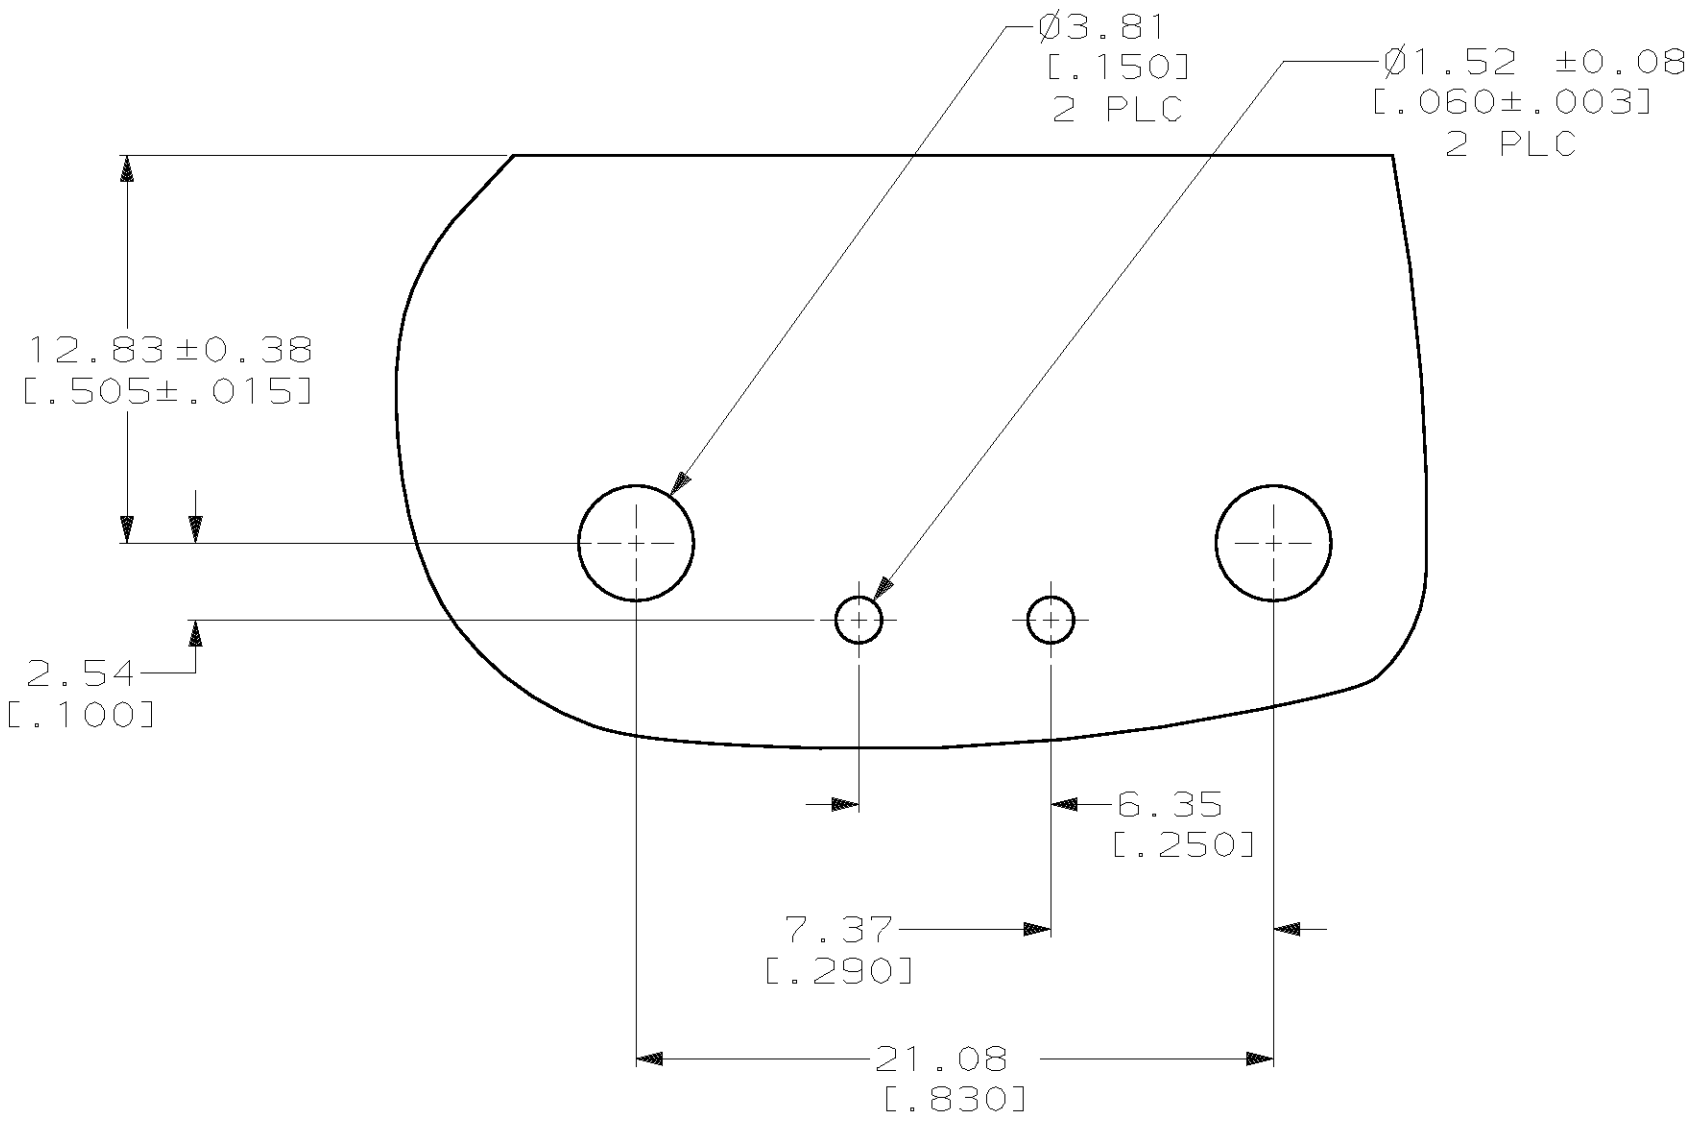

RECOMMENDED MOUNTING HOLE PATTERN
FOR .062 [1.57] THICK P.C. BOARD

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

PHOS BRONZE, PRE-TIN		NYLON UL94V-0		770994-1	
CONTACT		HOUSING		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ±0.13 [.005] ANGLES ± 0°30'		DR 8-17-92 B. LEWIS CHK 8-17-92 R. SWING APPD 8-27-92 G. BROWN APPD 8-27-92 G. BROWN		NAME AMP Incorporated Harrisburg, PA 17105-3608	
SEE TABLE		PRODUCT SPEC -		PIN HEADER ASSEMBLY, RIGHT ANGLE MOUNT, 2 POSITION, UNIVERSAL MATE-N-LOK™	
FINISH		APPLICATION SPEC -		SIZE D	CAGE CODE 00779
SEE TABLE		WEIGHT -		DRAWING NO C-770994	
				SCALE 4:1	SHEET 1 OF 1

CUSTOMER DRAWING