


4

3

2

1

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
D	REV. PER ECN # T-8881	870930	I. MYON
E	REV. PER ECN # T-20028	95/9/19	Hi-gly

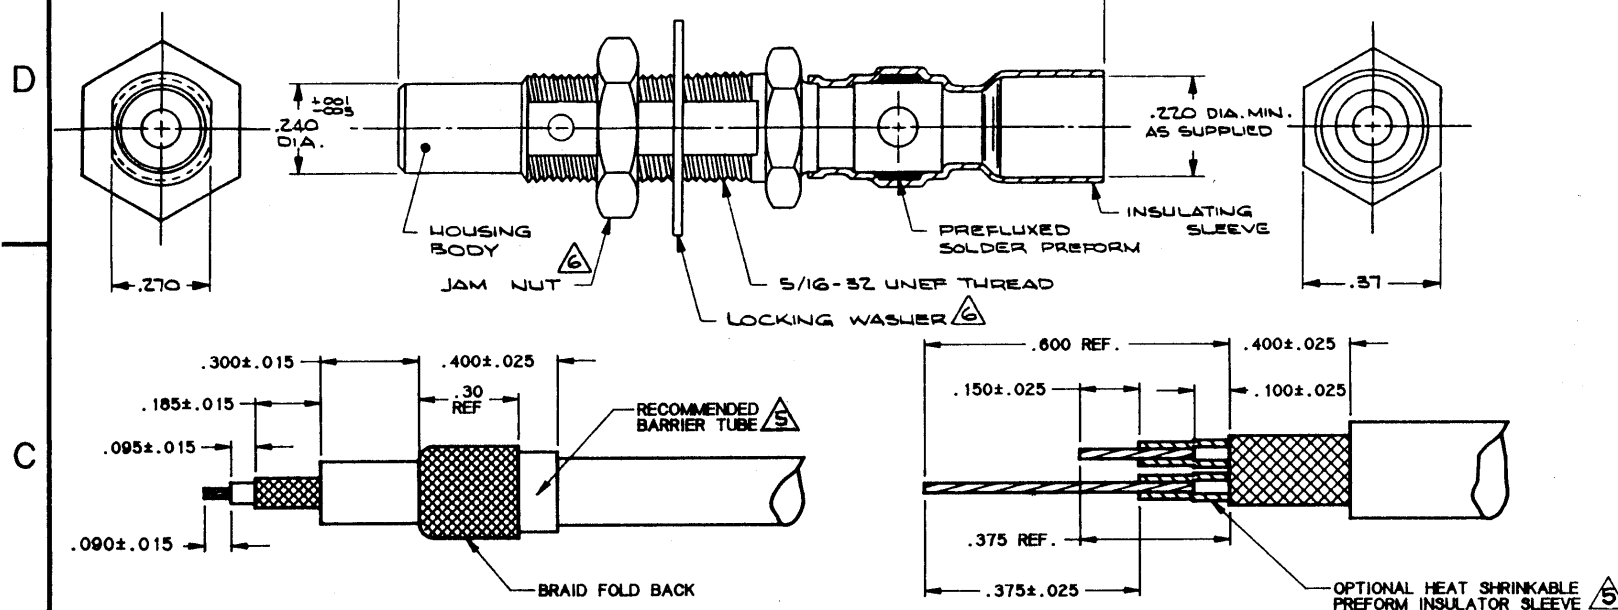

TRIAx STRIP

(RAYTHEON #10270730)

TWINAX STRIP

(RAYTHEON # MIS-20054/1-001)

NOTES:

1. PART DESCRIPTION:

CONNECTOR, JACK, TRIAXIAL, BULKHEAD (RAYTHEON #1145047) COMPLETE WITH PREFLUXED SOLDER PREFORM RING AND HEAT SHRINKABLE INSULATING SLEEVE.

MATERIAL:

HOUSING BODY: BRASS ALLOY PER ASTM B16 (QQ-B-626)
JAM NUT: BRASS ALLOY PER ASTM B16 (QQ-B-626)
LOCK WASHER: STAINLESS STEEL PER QQ-S-763
INSULATING SLEEVE: HEAT SHRINKABLE, POLYVINYLIDENE FLUORIDE (TRANSPARENT BLUE)
SOLDER RING: PREFLUXED SOLDER PREFORM, COMPOSITION Sn63, FLUX TYPE RMA, PER QQ-S-571

FINISH:


INSULATOR: THERMOPLASTIC PER LP 392
HOUSING BODY: TIN PLATED PER MIL-T-10727
JAM NUT: NICKEL PLATED PER QQ-N-290
LOCK WASHER: PASSIVATE PER MIL-S-5002

2. HOUSING ACCOMMODATION:

HOUSING DESIGNED TO ACCEPT SHIELDED CONTACTS MIS-20067/1 THRU MIS-20067/4 SHIELDED; RAYCHEM SOLDER TACT D-602-44/45 AND D-602-54/55.

3. WIRE SIZE: HOUSING WILL TERMINATE OUTER SHIELD OF TRIAX/TWINAX CABLE HAVING A SHIELD DIAMETER OF .185 MAX.

4. MATING CONNECTOR: THIS CONNECTOR WILL MATE WITH D-621-0001 (RAYTHEON #11453046) CONNECTOR, PLUG SUBMINIATURE, TRIAXIAL.



If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

ACCESSORIES	
CTA-0012	BARRIER TUBE
CTA-0013	PREFORM INSULATOR SLEEVES (2)
D-600-0024	STRAIN RELIEF

SPECIFICATION CONTROL DRAWING

© Raychem Corporation 1988

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.	DRAWN	CRN	76 10 19	Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MILBURN PARK, CALIFORNIA 94585	
	CHECKED	R. YATES	76 10 20		
	APPROVED	R. YATES	76 10 20	TITLE CONNECTOR, JACK, TRIAxIAL, BULKHEAD	
	APPROVED				
DECIMALS					
.XXX ± .005	[	mm]			
.XX ± .01	[	mm]			
ANGLES					
.X ±					
WEIGHT					
lbs	[	g]			
THIRD ANGLE PROJECTION					
			SIZE	ORDER IDENT. NO.	DRWG. NO.
			A	08090	D-621-0002
			DO NOT SCALE THIS DRAWING		SHEET 1 OF 1

- ITEMS SUPPLIED AS PART OF CONNECTOR ASSEMBLY.
- JAM NUT AND LOCKING WASHER SUPPLIED UNASSEMBLED.
- RECOMMENDED TWINAX STRIPING TOOL AD-1479 OR AD-1496
- SEE PROCEDURE ES 61124 FOR TERMINATION INFORMATION.

4

3

2

1

ORIGINAL DOCUMENT

D-621-0002

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-621-0002CS064](#)