
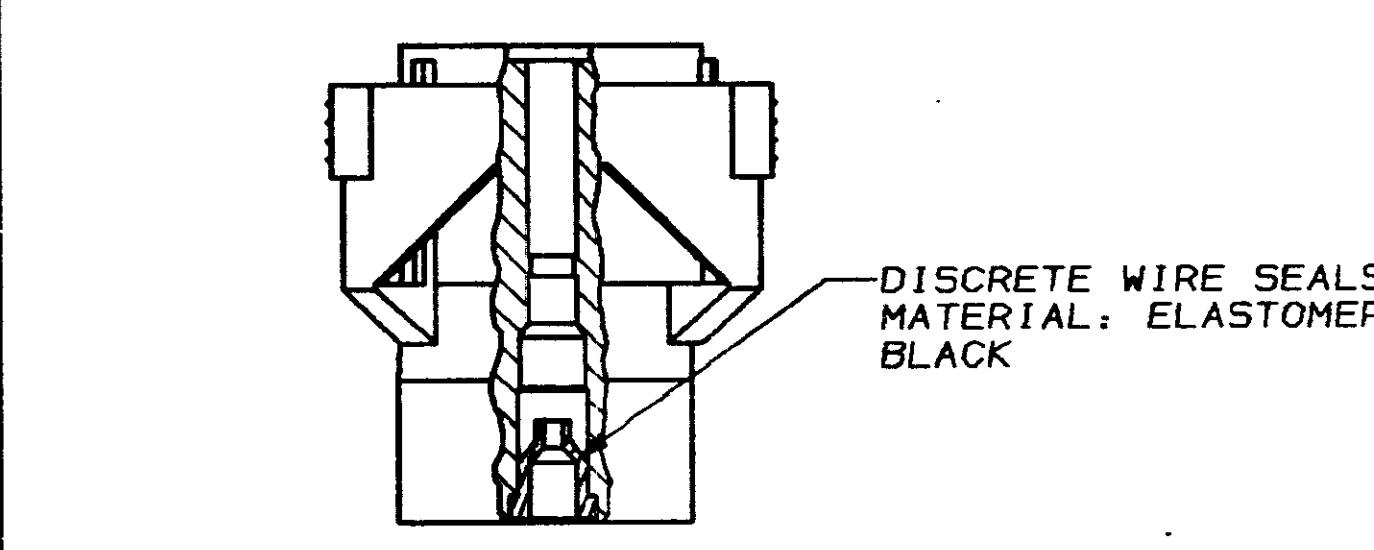


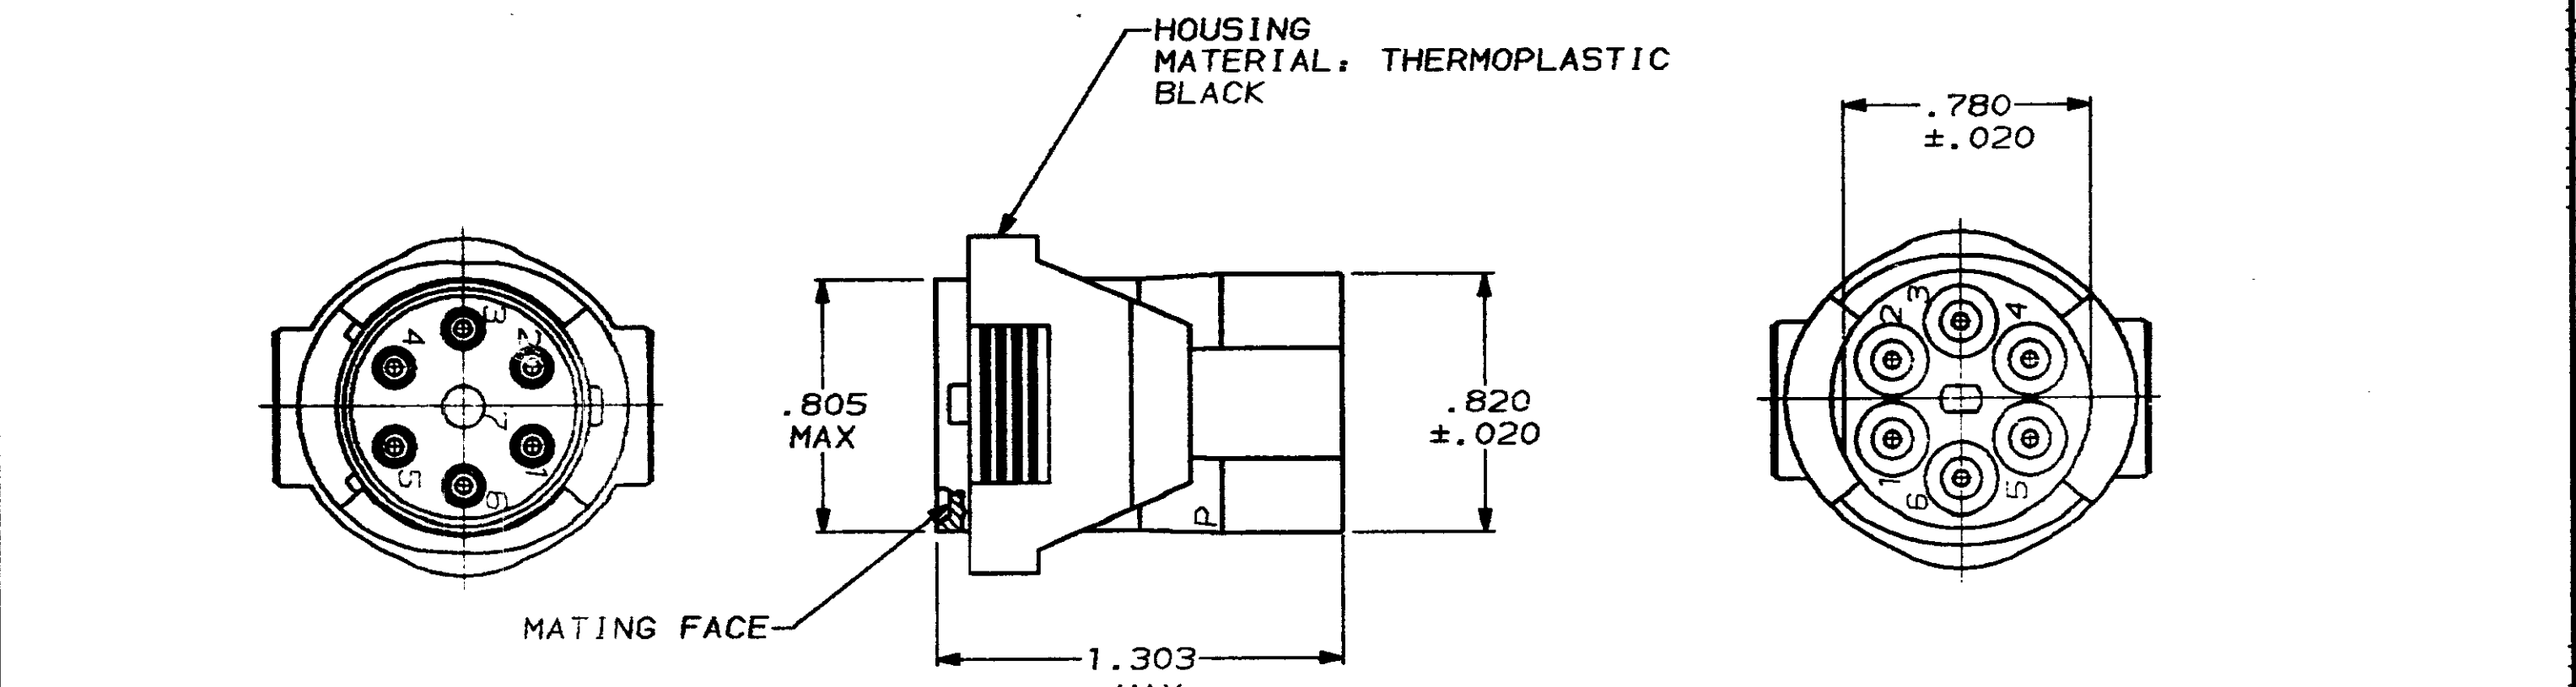

- 1. WIRE INSULATION SEALING RANGE .070-.130 DIA.
- 2. THIN MEMBRANE PERMISSIBLE ON SMALL DIAMETER OF WIRE SEALS.
- 3. ROTATION OF CAVITY CIRCUIT KEY FROM PART TO PART IS PERMISSIBLE.

207849-1

PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 8-17-90 J GALLUCCI BG CHK J. Mullins 1-4-91 APPD K. Beaver 1-19-91 APPD L. Himm 1/29/91 PRODUCT SPEC - APPLICAT: ON SPEC - WEIGHT -	AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL SEE CALLOUT	FINISH -	NAME PLUG, 6 POSITION, STANDARD ECONOSEAL CONNECTOR	
SIZE B		FSCH NO 00779	DRAWING NO 207849
SCALE 2:1		SHEET 1 OF 1	