

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1708852

SPECIAL TYPES

For ATO® Fuses In-Line Type

SPECIFICATIONS:

Electrical: Intended for use with 32 volts Autofuse® fuses rated to 20 or 30 amperes depending on wire size and terminal combinations.

Mounting: Capable of snap-mounting to panel from rear. Fuseholders interlock for multiple mounting.

Molded Parts: Black Thermoplastic (UL 94V2).

Terminals: Brass. Tin-plated. Snap-lock into body.


Ambient Temperature: -40°C to +85°C.

Wire: Stranded with PVC insulation, black #14 AWG for **155 300 Series** and orange #10 AWG for **155 400 Series**.

PATENTED

ORDERING INFORMATION:

| Catalog Number | | | |
|--|---|--------------------------------------|----------------------|
| Unassembled | Assembled with 8" Wire Loop, No Fuse | Assembled with 8" Wire Loop and Fuse | Fuse Amperage Rating |
| 155 320U (Terminals designed for #14 AWG stranded wire and marked "14"). | 155 300 (#14 wire/ terminals rated to 20A). | 155 303A | 3 |
| | | 155 304A | 4 |
| | | 155 305A | 5 |
| | | 155 37.5A | 7.5 |
| | | 155 310A | 10 |
| | | 155 315A | 15 |
| | | 155 320A | 20 |
| 155 430U (Terminals designed for #10 AWG stranded wire and marked "10"). | 155 400 (#10 wire/ terminals rated to 30A). | 155 425A | 25 |
| | | 155 430A | 30 |

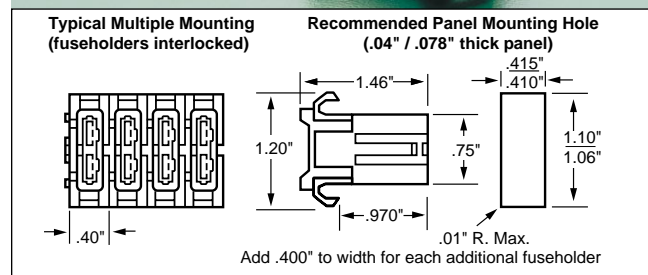

For ATO® Fuses P.C. Board Mount Type

SPECIFICATIONS:

Electrical: Intended for use with 32 volts ATO® fuses rated to 15 amperes.


Molded Parts: Black Thermoplastic

Terminals: Copper Alloy, Tin Plated

Ambient Temperature: -40°C to +85°C.

ORDERING INFORMATION:

Catalog Number: 04450715

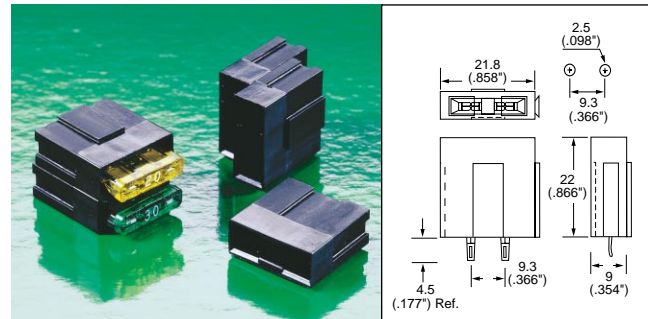

For MINI® Fuses In-Line Type — Easy Crimp Fuseholder

SPECIFICATIONS:

Terminals: Copper Alloy/Tin plated.


Body: Black Thermoplastic.

Operating Temperature: -40°C to +105°C.

Use standard crimping tool and crimp the matted area to secure wire. (Possible crimp tool - Ideal #30-428 [Toothed Die slot] or equivalent).

ORDERING INFORMATION:

| Catalog Number | Description |
|----------------|---|
| 153 002 | 20A Max. Rating — Terminals will accept #16–22 AWG (1.0-.33 mm ²) stranded wire (use appropriate wire size based on fuse usage). For example — Use #16 AWG wire for 20A fuse. |
| 153 003 | 30A Max. Rating — Terminals will accept #10–14 AWG (5.0-2.0 mm ²) stranded wire (use appropriate wire size based on fuse usage). For example — Use #10 AWG wire for 30A fuse. |

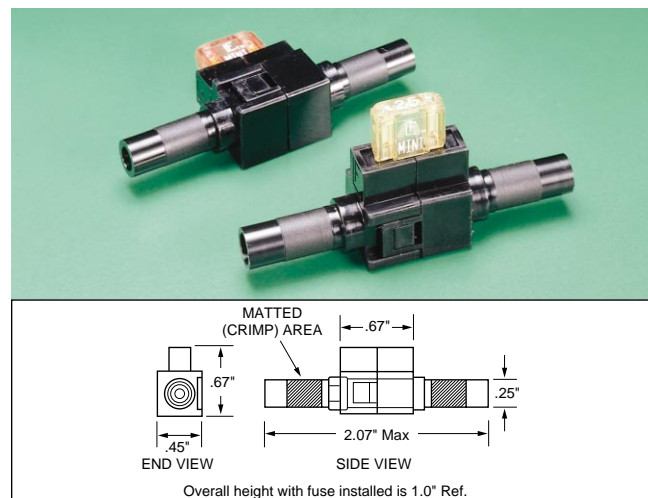

Tool For Fuse Removal or Replacement; Part No. 097024.