

Not Recommended for New Designs

This product was manufactured for Maxim by an outside wafer foundry using a process that is no longer available. It is not recommended for new designs. The data sheet remains available for existing users.

A Maxim replacement or an industry second-source may be available. Please see the QuickView data sheet for this part or contact technical support for assistance.

For further information, [contact Maxim's Applications Tech Support](#).



5V/3.3V/3V 5A Step-Down, PWM, Switch-Mode DC-DC Regulators

General Description

The MAX787/MAX788/MAX789 are monolithic, bipolar, pulse-width modulation (PWM), switch-mode, step-down DC-DC regulators. Each is rated at 5A. Very few external components are needed for standard operation because the power switch, oscillator, feedback, and control circuitry are all on-chip. Employing a classic buck topology, these regulators perform high-current step-down functions.


The MAX787/MAX788/MAX789 have excellent dynamic and transient response characteristics, while featuring cycle-by-cycle current limiting to protect against overcurrent faults and short-circuit output faults. They also have a wide 8V to 40V input range.

Each regulator is available in a 5-pin TO-220 package. These devices have a preset 100kHz oscillator frequency and a preset current limit of 6.5A. See the MAX724/MAX726 data sheet for more applications information.

Applications

Distributed Power from High-Voltage Buses
High-Current, High-Voltage Step-Down
Multiple-Output Buck Converter

Typical Operating Circuit

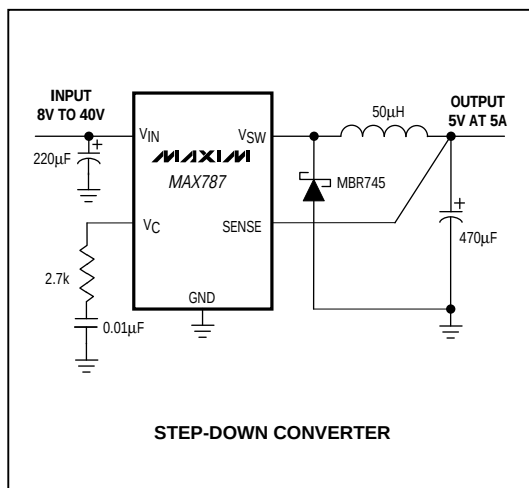

Features

- ♦ **Input Range:** Up to 40V
- ♦ **5A On-Chip Power Switch**
- ♦ **Fixed Outputs:** 5V (MAX787)
3.3V (MAX788)
3V (MAX789)
- ♦ **100kHz Switching Frequency**
- ♦ **Excellent Dynamic Characteristics**
- ♦ **Few External Components**
- ♦ **8.5mA Quiescent Current**
- ♦ **TO-220 Package**


Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
MAX787CCK	0°C to +70°C	5 TO-220
MAX787ECK	-40°C to +85°C	5 TO-220
MAX788CCK	0°C to +70°C	5 TO-220
MAX788ECK	-40°C to +85°C	5 TO-220
MAX789CCK	0°C to +70°C	5 TO-220
MAX789ECK	-40°C to +85°C	5 TO-220

Product Selection Guide

PART	V _{OUT} (V)	I _{OUT} MAX (A)
MAX724	Adjustable	5
MAX726	Adjustable	2
MAX727	5	2
MAX728	3.3	2
MAX729	3	2
MAX787	5	5
MAX788	3.3	5
MAX789	3	5

Pin Configuration

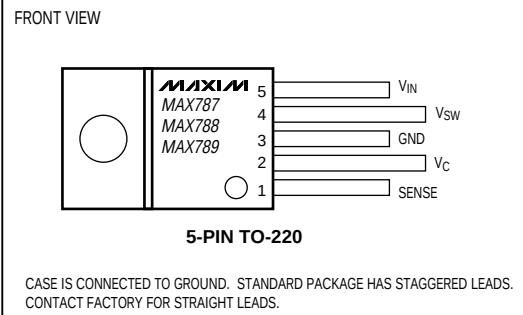

MAX787/MAX788/MAX789



5V/3.3V/3V 5A Step-Down, PWM, Switch-Mode DC-DC Regulators

ABSOLUTE MAXIMUM RATINGS

Input Voltage 45V
 Switch Voltage with Respect to Input Voltage 50V
 Switch Voltage with Respect to GND Pin (V_{SW} negative)
 (Note 1) 35V
 SENSE Pin Voltage -0.3V, +10V
 Operating Temperature Ranges
 MAX78_CCK 0°C to +70°C
 MAX78_ECK -40°C to +85°C

Junction Temperature Ranges

MAX78_CCK 0°C to +125°C
 MAX78_ECK -40°C to +125°C
 Storage Temperature Range -65°C to +160°C
 Lead Temperature (soldering, 10sec) +300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_{IN} = 25V$, $T_J = T_{MIN}$ to T_{MAX} , unless otherwise noted.)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Input Supply Voltage Range			8.0		40.0	V
Switch-On Voltage (Note 1)	$I_{SW} = 1A$	$T_J \geq 0^\circ C$			1.85	V
		$T_J < 0^\circ C$			2.10	
	$I_{SW} = 5A$	$T_J \geq 0^\circ C$			2.30	
		$T_J < 0^\circ C$			2.50	
Switch-Off Leakage	$V_{IN} \leq 25V$, $V_{SW} = 0V$	$T_J = +25^\circ C$		5	300	μA
	$V_{IN} = 40V$, $V_{SW} = 0V$	$T_J = +25^\circ C$		10	500	
Supply Current (Note 3)	$V_{IN} \leq 40V$, $V_{SENSE} = 5.5V$			8.5	11	mA
Minimum Supply Voltage	Normal Mode			7.3	8.0	V
	Start-Up Mode (Note 4)	$T_J \geq 0^\circ C$		3.5	4.8	
		$T_J < 0^\circ C$		3.5	5.0	
Switch-Current Limit (Note 5)			5.5	6.5	8.5	A
Maximum Duty Cycle			85	90		%
Switching Frequency		$T_J = +25^\circ C$	90	100	110	kHz
		$T_J \leq +125^\circ C$	85		120	
	$V_{OUT} = V_{SENSE} = 0V$ (Note 5)	$T_J = +25^\circ C$		20		
Switching Frequency Line Regulation	$8V \leq V_{IN} \leq 40V$			0.03	0.10	%/V
Error-Amplifier Voltage Gain	$1V \leq V_C \leq 4V$	$T_J = +25^\circ C$		2000		V/V
Error-Amplifier Transconductance		$T_J = +25^\circ C$	3000	5000	9000	μmho
Error-Amplifier Source Current	$V_{SENSE} = V_{OUT} - 10\%$	$T_J = +25^\circ C$	100	140	225	μA
Error-Amplifier Sink Current	$V_{SENSE} = V_{OUT} + 10\%$	$T_J = +25^\circ C$	0.6	1.0	1.7	mA

5V/3.3V/3V 5A Step-Down, PWM, Switch-Mode DC-DC Regulators

ELECTRICAL CHARACTERISTICS (continued)

($V_{IN} = 25V$, $T_J = T_{MIN}$ to T_{MAX} , unless otherwise noted.)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
SENSE Voltage	$V_C = 2V$	MAX787	4.85	5.00	5.15	V
		MAX788	3.20	3.30	3.40	
		MAX789	2.90	3.00	3.10	
SENSE Pin Divider Resistance	$T_J = +25^{\circ}C$	MAX787	3.0	5.0	8.0	k Ω
		MAX788	2.5	4.2	7.0	
		MAX789	2.2	3.8	6.5	
Output Voltage Tolerance	V_{OUT} (nominal) = 5V (MAX787), 3.3V (MAX788), or 3V (MAX789); all conditions of input voltage, output voltage, and load current	$T_J = +25^{\circ}C$	± 0.5		± 2.0	%
		$T_J = T_{MIN}$ to T_{MAX}	± 1.0		± 3.0	
Output Voltage Line Regulation	$8V \leq V_{IN} \leq 40V$		0.005		0.020	%/V
V_C Voltage	0% duty cycle	$T_J = +25^{\circ}C$	1.5			V
V_C Voltage Temperature Coefficient	0% duty cycle	$T_J = T_{MIN}$ to T_{MAX}	-4			mV/ $^{\circ}C$
Thermal Resistance Junction to Case (Note 6)			2.5			$^{\circ}C/W$

Note 1: Do not exceed switch-to-input voltage limitation.

Note 2: For switch currents between 1A and 5A, maximum switch-on voltage can be calculated via linear interpolation.

Note 3: By setting the SENSE pin to 5.5V, the V_C pin is forced to its low clamp level and the switch duty cycle is forced to zero, approximating the zero load condition.

Note 4: For proper regulation, total voltage from V_{IN} to GND must be $\geq 8V$ after start-up.

Note 5: To avoid extremely short switch-on times, the switch frequency is internally scaled down when V_{SENSE} is less than 2.6V (MAX787), 2.0V (MAX788), or 1.8V (MAX789). Switch-current limit is tested with V_{SENSE} adjusted to give a 1 μ s minimum switch-on time.



Note 6: Guaranteed, not production tested.

Pin Description

PIN	NAME	FUNCTION
1	SENSE	SENSE Input is the internal error amplifier's input, and should be directly connected to V_{OUT} . SENSE also aids current limiting by reducing oscillator frequency when V_{OUT} is low.
2	V_C	Error-Amplifier Output. A series RC network connected to this pin compensates the MAX787/MAX788/MAX789. Output swing is limited to about 5.8V in the positive direction and -0.7V in the negative direction. V_C can also synchronize the MAX787/MAX788/MAX789 to an external TTL clock in the 115kHz to 170kHz range. See MAX724/MAX726 data sheet.
3	GND	Ground requires a short, low-noise connection to ensure good load regulation. The internal reference is referred to GND, so errors at this pin are multiplied by the error amplifier.
4	V_{SW}	Internal Power Switch Output. The switch output can swing 35V below ground and is rated for 5A.
5	V_{IN}	V_{IN} supplies power to the internal circuitry and also connects to the collector of the internal power switch. V_{IN} must be bypassed with a low-ESR capacitor, typically 200 μ F or 220 μ F.

5V/3.3V/3V 2A Step-Down, PWM, Switch-Mode DC-DC Regulators

Package Information

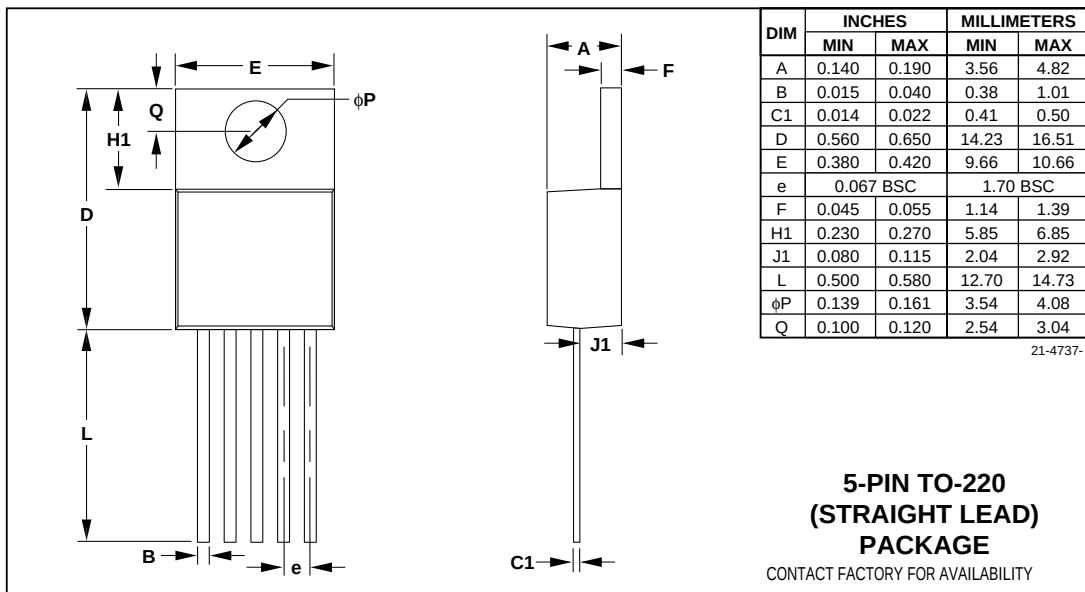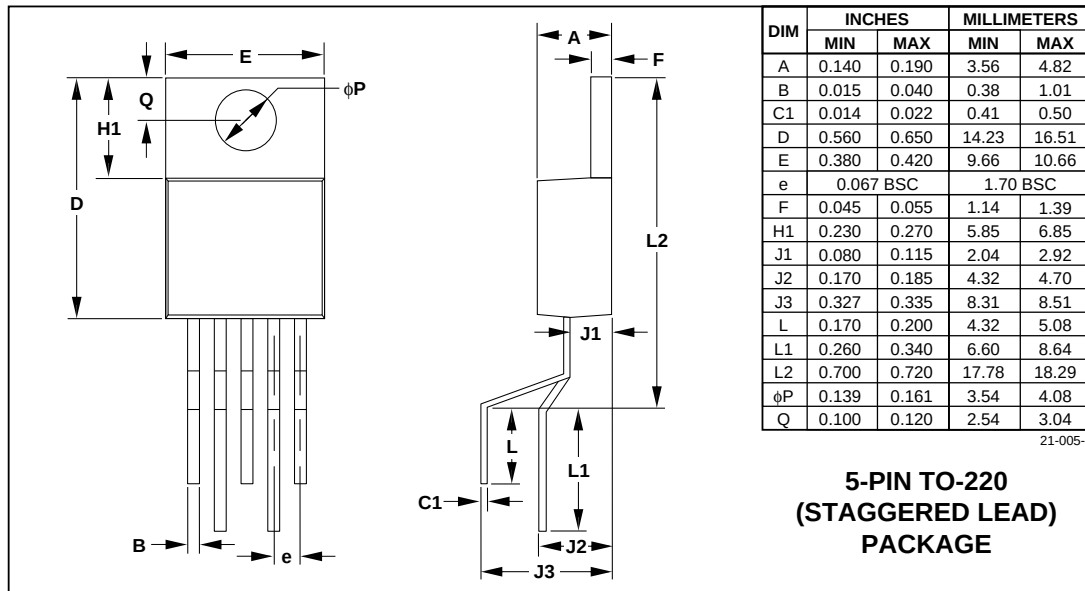

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

4 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

© 1995 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products.