
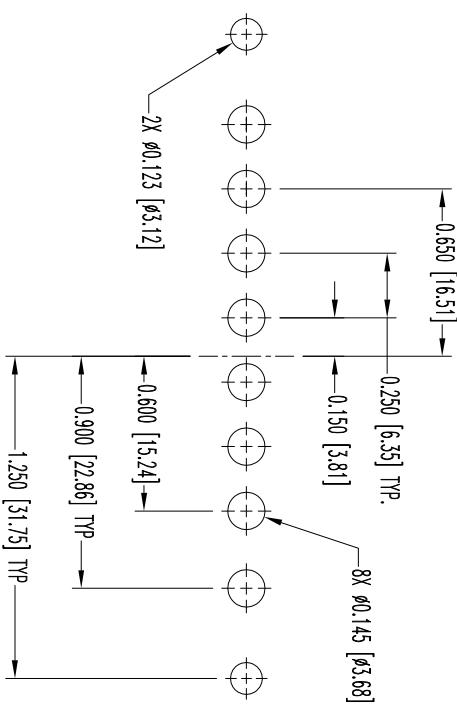
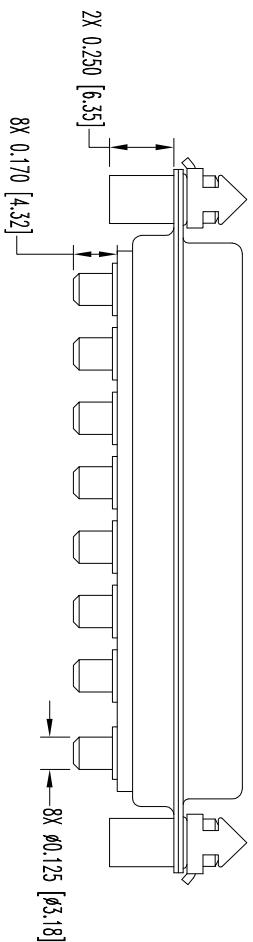
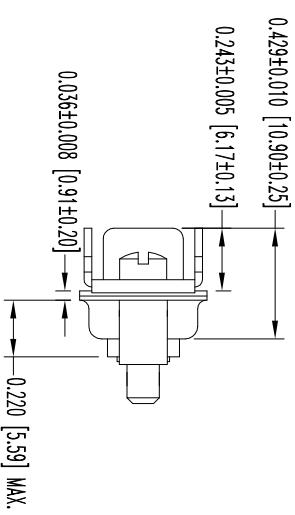


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC. IT IS THE PROPERTY OF POSITRONIC. USE OF THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OF THE USE OF THE INFORMATION CONTAINED IN THIS DRAWING.

DATE	REV	REVISION/RECORD	APP	DR	CK
0-05	NC	ECO 31056	RCW	BS	TK
0-09					
3-24	A	ECO 32270	COLD BE	COLB	
10					

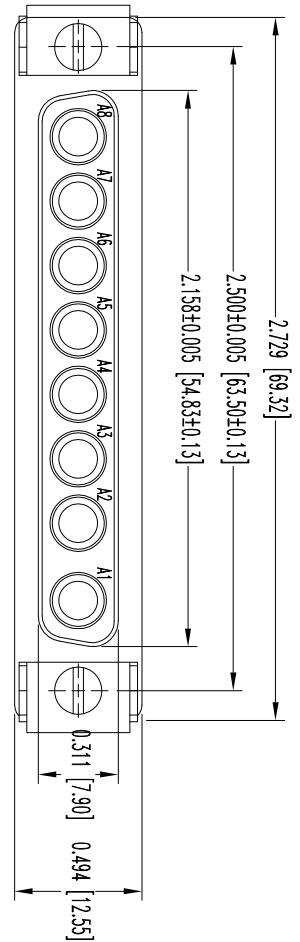

NOTES:

- MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR: BLUE.  
CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.  
SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.  
JACKSCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.  
SPACERS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
- DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION.  
VISIT [CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDDENSITYCOMBO-D](http://CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDDENSITYCOMBO-D) OR [CONNECTPOSITRONIC.COM](http://CONNECTPOSITRONIC.COM).
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

CONTACT HOLE PATTERN



POSITRONIC  
INDUSTRIES INC.  
[www.connectpositronic.com](http://www.connectpositronic.com)

FSCM 28198

SCALE	DRAWN BY	APPROVED BY
CBM SERIES	N.T.S.	R. WILLIAMS
±0.015 [0.38]	DATE	DRAWING NUMBER
ANGULAR TOL.	8-25-09	SK10765
		REV. A