

MAZ4000 Series

Silicon planar type

For stabilization of power supply

■ Features

- High reliability, achieved by the DHD structure
- Allowing to insert to a 5 mm pitch hole
- Finely divided zener-voltage rank
- Sharp rising performance
- Wide voltage range: $V_Z = 2.0 \text{ V to } 39 \text{ V}$

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Average forward current	$I_{F(AV)}$	250	mA
Instantaneous forward current	I_{FRM}	250	mA
Total power dissipation ^{*1}	P_{tot}	370	mW
Non-repetitive reverse surge power dissipation ^{*2}	P_{ZSM}	30	W
Junction temperature	T_j	200	$^\circ\text{C}$
Storage temperature	T_{stg}	-65 to +200	$^\circ\text{C}$

Note) *1 : With a printed-circuit board

*2 : $t = 100 \mu\text{s}$, $T_j = 150^\circ\text{C}$

■ Common Electrical Characteristics $T_a = 25^\circ\text{C}$ ^{*1}


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V_F	$I_F = 10 \text{ mA}$		0.8	0.9	V
Zener voltage ^{*2}	V_Z	I_Z Specified value				V
Operating resistance	R_{ZK}	I_Z Specified value				Ω
	R_Z	I_Z Specified value				Ω
Reverse current	I_{R1}	V_R Specified value	Refer to the list of the electrical characteristics within part numbers			μA
	I_{R2}	V_R Specified value				μA
Temperature coefficient of zener voltage ^{*3}	S_Z	I_Z Specified value				mV/ $^\circ\text{C}$
Terminal capacitance	C_t	V_R Specified value				pF

Note) 1. Rated input/output frequency: 5 MHz

2. *1 : The V_Z value is for the temperature of 25°C . In other cases, carry out the temperature compensation.

*2 : Guaranteed at 20 ms after power application.

*3 : $T_j = 25^\circ\text{C}$ to 150°C

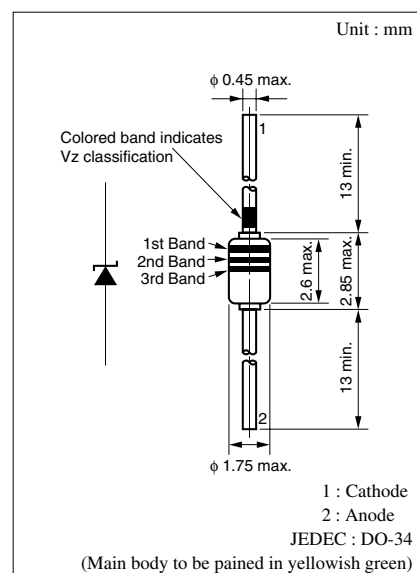

•Color indication of V_Z rank classification

L rank	M rank	H rank
Black	Blue	Red

- $V_Z = 2.0 \text{ V to } 6.8 \text{ V}$ ($I_Z = 5 \text{ mA}$)

2 **Panasonic**

■ Electrical characteristics within part numbers (continued) $T_a = 25^\circ\text{C}$

• $V_Z = 7.5\text{ V to }20\text{ V}$ ($I_Z = 5\text{ mA}$)

Part Number	Zener voltage			Reverse current			Operating resistance				Temperature coefficient of zener voltage			Terminal capacitance		Marking (Color indication) Main body: Yellowish green			
	V_Z (V) $I_Z = 5\text{ mA}$			I_{R1} (μA) V_R (V)	I_{R2} (μA) V_R (V)	R_Z (Ω) $I_Z = 5\text{ mA}$	R_{ZK} (Ω) I_Z (mA)		S_Z (mV/°C) $I_Z = 5\text{ mA}$	S_Z (mV/°C) $I_Z = 5\text{ mA}$		C_t (pF) ($V_R = 0\text{ V}$) $f = 1\text{ MHz}$		C_t (pF) ($V_R = 0\text{ V}$) $f = 1\text{ MHz}$		1st.	2nd.	3rd.	
	Min	Nom	Max	Max	Max		Typ	Max		Min	Typ	Max	Typ						Max
MAZ4075	7.0	7.5	7.9	5	1	6.5	60	6	15	0.5	120	2.5	4	5.3	80	100	Purple	Green	Green
MAZ4075-L	7.07	7.3	7.43			6.5													
MAZ4075-M	7.29	7.5	7.67			6.7													
MAZ4075-H	7.51	7.7	7.89			7.0													
MAZ4082	7.7	8.2	8.7	5	0.5	7.2	60	6	15	0.5	120	3.2	4.6	6.2	75	95	Gray	Red	Red
MAZ4082-L	7.77	7.9	8.17			7.2													
MAZ4082-M	8.03	8.2	8.43			7.5													
MAZ4082-H	8.29	8.5	8.7			7.7													
MAZ4091	8.5	9.1	9.6	6	0.2	8	60	6	15	0.5	130	3.8	5.5	7	70	90	White	Brown	Brown
MAZ4091-L	8.58	8.8	9.02			8													
MAZ4091-M	8.87	9.1	9.33			8.3													
MAZ4091-H	9.14	9.4	9.6			8.6													
MAZ4100	9.4	10	10.6	7	0.2	8.9	60	8	20	0.5	130	4.5	6.4	8	70	90	Brown	Black	—
MAZ4100-L	9.44	9.7	9.92			8.9													
MAZ4100-M	9.75	10	10.25			9.2													
MAZ4100-H	10.07	10.3	10.59			9.5													
MAZ4110	10.4	11	11.6	7	0.1	9.9	60	10	20	0.5	170	5.4	7.4	9	65	85	Brown	Brown	—
MAZ4110-L	10.4	10.7	10.94			9.9													
MAZ4110-M	10.73	11	11.28			10.2													
MAZ4110-H	11.05	11.3	11.6			10.5													
MAZ4120	11.4	12	12.7	8	0.1	10.9	60	10	25	0.5	170	6	8.4	10	65	85	Brown	Red	—
MAZ4120-L	11.4	11.7	11.96			10.9													
MAZ4120-M	11.73	12	12.33			11.2													
MAZ4120-H	12.06	12.3	12.68			11.5													
MAZ4130	12.4	13	14.1	9	0.1	11.9	60	10	30	0.5	170	7	9.4	11	60	80	Brown	Orange	—
MAZ4130-L	12.4	12.7	12.99			11.9													
MAZ4130-M	12.73	13	13.4			12.2													
MAZ4130-H	13.25	13.7	14.08			12.7													
MAZ4140-M	13.65	14	14.35	9	0.1	13.1	60	10	30	0.5	170	7	10	13	60	80	Brown	Yellow	—
MAZ4150	13.9	15	15.6	10	0.05	13.4	60	10	30	0.5	170	9.2	11.4	13	55	75	Brown	Green	—
MAZ4150-L	13.9	14.3	14.76			13.4													
MAZ4150-M	14.6	15	15.35			14.1													
MAZ4150-H	14.95	15.3	15.6			14.4													
MAZ4160	15.3	16	17.1	11	0.05	14.8	60	10	40	0.5	170	10.4	12.4	14	52	75	Brown	Blue	—
MAZ4160-L	15.3	15.7	16.09			14.8													
MAZ4160-M	15.7	16	16.5			15.2													
MAZ4160-H	16.26	16.7	17.1			15.7													
MAZ4180	16.9	18	19.1	13	0.05	16.4	60	10	45	0.5	170	12.4	14.4	16	47	70	Brown	Gray	—
MAZ4180-L	16.9	17.3	17.76			16.4													
MAZ4180-M	17.55	18	18.45			17													
MAZ4180-H	18.2	18.7	19.1			17.7													
MAZ4200	18.8	20	21.2	14	0.05	18.3	60	15	55	0.5	180	14.4	16.4	18	36	60	Red	Black	—
MAZ4200-L	18.85	19.3	19.81			18.3													
MAZ4200-M	19.50	20	20.5			19													
MAZ4200-H	20.15	20.7	21.19			19.6													

■ Electrical characteristics within part numbers (continued) $T_a = 25^\circ\text{C}$

• $V_Z = 22\text{ V to } 24\text{ V}$ ($I_Z = 5\text{ mA}$)

Part Number	Zener voltage			Reverse current				Operating resistance				Temperature coefficient of zener voltage			Terminal capacitance		Marking (Color indication) Main body: Yellowish green		
	V _Z (V)			I _{R1} (μA)		I _{R2} (μA)		R _Z (Ω)		R _{ZK} (Ω)		S _Z (mV/°C)			C _t (pF)				
	I _Z = 5 mA			V _R		V _R		I _Z = 5 mA		I _Z		I _Z = 5 mA			(V _R = 0 V) f = 1 MHz				
Min	Nom	Max	(V)	Max	(V)	Max	Typ	Max	(mA)	Max	Min	Typ	Max	Typ	Max	1st.	2nd.	3rd.	
MAZ4220	20.8	22	23.3	15	0.05	20.3	20	5.5	0.5	180	16.4	18.4	20	34	60	Red	Red	—	
MAZ4220-L	20.8	21.3	21.86			20.3													
MAZ4220-M	21.45	22	22.55			20.9													
MAZ4220-H	22.1	22.7	23.24			21.6													
MAZ4240	22.8	24	25.6	17	0.05	22.3	25	70	0.5	180	18.4	20.4	22	33	55	Red	Yellow	—	
MAZ4240-L	22.8	23.3	23.97			22.3													
MAZ4240-M	23.5	24	24.7			23													
MAZ4240-H	24.35	25	25.6			23.8													

• $V_Z = 27\text{ V to } 39\text{ V}$ ($I_Z = 2\text{ mA}$)

Part Number	Zener voltage			Reverse current				Operating resistance				Temperature coefficient of zener voltage			Terminal capacitance		Marking (Color indication) Main body: Yellowish green		
	V_Z (V) $I_Z = 2\text{ mA}$			I_{R1} (μA) V_R		I_{R2} (μA) V_R		R_Z (Ω) $I_Z = 2\text{ mA}$		R_{ZK} (Ω) I_Z		S_Z (mV/ $^{\circ}\text{C}$) $I_Z = 2\text{ mA}$			C_t (pF) ($V_R = 0\text{ V}$) $f = 1\text{ MHz}$				
	Min	Nom	Max	(V)	Max	(V)	Max	Typ	Max	(mA)	Max	Min	Typ	Max	Typ	Max			
	1st.	2nd.	3rd.																
MAZ4270	25.1	27	28.9	19	0.05	24.8	60	25	80	0.5	200	21.4	23.4	25.3	30	50	Red	Purple	—
MAZ4270-L	25.3	26	26.7			24.8													
MAZ4270-M	26.3	27	27.7			25.8													
MAZ4270-H	27.3	28	28.7			26.8													
MAZ4300	28	30	32	21	0.05	27.8	60	30	80	0.5	200	24.4	26.6	29.4	27	50	Orange	Black	—
MAZ4300-L	28.3	29	29.7			27.8													
MAZ4300-M	29.3	30	30.8			28.8													
MAZ4300-H	30.2	31	31.8			29.7													
MAZ4330	31	33	35	23	0.05	30.7	60	35	80	0.5	200	27.4	29.7	33.4	25	45	Orange	Orange	—
MAZ4330-L	31.2	32	32.8			30.7													
MAZ4330-M	32.2	33	33.8			31.7													
MAZ4330-H	33.2	34	34.9			32.7													
MAZ4360	34	36	38	25	0.05	33.6	60	35	90	0.5	200	30.4	33	37.4	23	45	Orange	Blue	—
MAZ4360-L	34.1	35	35.9			33.6													
MAZ4360-M	35.1	36	36.9			34.6													
MAZ4360-H	36.1	37	37.9			35.6													
MAZ4390	37	—	41	27	0.05	36	60	—	130	0.5	250	33.4	36.4	41.2	21	45	Orange	White	—
MAZ4390-L	37.1	—	39			36													
MAZ4390-M	38	—	40			36													
MAZ4390-H	39	—	41			36													

Note) 1. The V_Z value is the one after power application for 20 ms at $T_a = 25^\circ\text{C}$.

2. The zener voltage temperature coefficient is the one for $T_j = 25^\circ\text{C to } 150^\circ\text{C}$.

