

Visti Stancor's Website at www.stancor.com


Telephone Coupling/Impedance Matching Transformers



Stock No.	Mfr.'s Type	Fig.	Impedance		Primary DCR	Dimensions — Inches					Weight (Oz.)	EACH 1-49
			Primary ±15%	Secondary ±10%		W	L	H	B	C		
928-9012	TTPC-2†	A	600	600 C.T.	46	0.781	0.650	0.490	0.145	0.530	0.5	4.04
928-7615	TTPC-3†	A	600 C.T.	600 C.T.	46	0.781	0.650	0.490	0.145	0.530	0.5	4.04
928-9020	TTPC-6†	B	600	600 C.T.	71	0.815	0.650	0.750	0.187	0.421	1.0	2.84
928-9022	TTPC-7†	B	600	600	36	0.781	0.650	0.740	0.187	0.421	0.6	2.84
928-9024	TTPC-8†	B	600 C.T.	600 C.T.	36	0.781	0.650	0.740	0.187	0.421	0.6	2.84
928-7620	TTPC-9†	B	600	600/600	47	1.040	0.958	0.859	0.200	0.781	1.0	2.84
928-9500	TTPC-13	C	600	600 C.T.	73	0.815	0.750	0.625	0.200	0.500	0.5	2.36

*DC current — 0 mA. †DC current — 90 mA. ‡Insertion losses — 1.2 dB max. @ 1 KHz. •Insertion losses — 1.8 dB max. @ 1 KHz.


Low Profile Transformers Low Boy™ Series

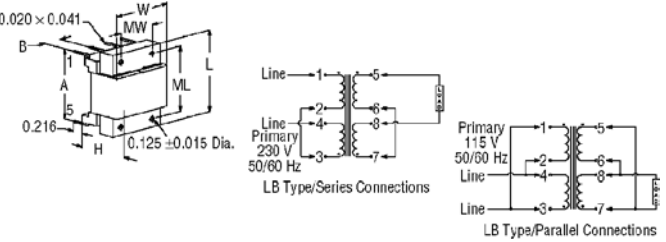

Output Watts	Dimensions (Inches)				
	H	W	L	A	B
2, 3	0.625	1.562	1.875	1.600	0.375
6	0.875	1.562	1.875	1.600	0.375
12	1.062	2.000	2.500	2.000	0.500

Stock No.	Mfr.'s Type	VA or Watts	Secondary		Wt. Oz.	EACH	
			Series	Parallel		1-49	50-99
928-5103	LB240	2	40.0 V C.T. @ 60 MA	20.0 V @ 120 MA	4.5	8.96	8.35
928-5108	LB315	3	15.0 V C.T. @ 225 MA	7.5 V @ 450 MA	4.5	9.05	8.44
928-5119	LB610	6	10.0 V C.T. @ 600 MA	5.0 V @ 1.2 A	5.5	9.70	9.04
928-5121	LB612	6	12.6 V C.T. @ 450 MA	6.3 V @ 900 MA	5.5	9.70	9.04
928-5123	LB616	6	16.0 V C.T. @ 350 MA	8.0 V @ 700 MA	5.5	9.70	9.04
928-5125	LB620	6	20.0 V C.T. @ 300 MA	10.0 V @ 600 MA	5.5	9.70	9.04
928-5129	LB634	6	34.0 V C.T. @ 170 MA	17.0 V @ 340 MA	5.5	9.70	9.04
928-5122	LB1212	12	12.6 V C.T. @ 900 MA	6.3 V @ 1.8 A	11.5	10.33	9.63
928-5128	LB1224	12	24.0 V C.T. @ 500 MA	12.0 V @ 1 A	11.5	10.32	9.62
928-5130	LB1234	12	34.0 V C.T. @ 340 MA	17.0 V @ 680 MA	11.5	10.33	9.63
928-5132	LB1240	12	40.0 V C.T. @ 300 MA	20.0 V @ 600 MA	11.5	10.33	9.63
928-5140	LB12230	12	230.0 V C.T. @ 50 MA	115.0 V @ 100 MA	11.5	10.33	9.63

Split Bobbin PC Mount Transformers Side Winder Series

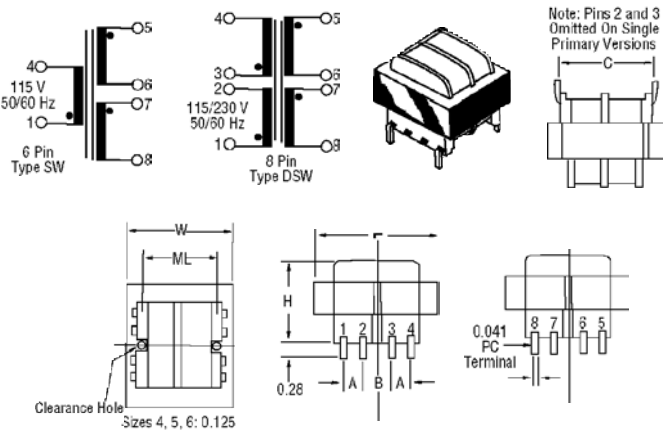

Size	VA	Dimensions (Inches)							Wt. Lbs.
		H	W	L	ML	A	B	C	
2	1.1	15/16	1 1/8	1 3/8	—	0.250	0.250	1.200	0.17
3	2.5	13/16	1 1/8	1 3/8	—	0.250	0.250	1.200	0.25
4	6.0	15/16	15/16	1 3/8	1 1/16	0.250	0.350	1.280	0.44
5	12.0	17/16	19/16	1 7/8	1 1/4	0.300	0.400	1.410	0.70
6	20.0	17/16	1 7/8	2 1/4	1 1/2	0.300	0.400	1.600	0.80

“Side Winder” Single 115 V, 50/60 Hz, 6 Pin

Note: First digit after “SW” in Mfr.’s Type indicates size code listed above.

Stock No.	Mfr.'s Type	Secondary RMS Rating			EACH	
		Individual	Series	Parallel	1-9	10-24
928-0100	SW-210	5.0 V @ 0.110 A	10.0 V C.T. @ 0.110 A	5.0 V @ 0.22 A	5.84	5.45
928-0102	SW-410	5.0 V @ 0.600 A	10.0 V C.T. @ 0.600 A	5.0 V @ 1.20 A	7.46	6.95
928-0103	SW-510	5.0 V @ 1.200 A	10.0 V C.T. @ 1.200 A	5.0 V @ 2.40 A	7.88	7.35
928-0105	SW-212	6.3 V @ 0.090 A	12.6 V C.T. @ 0.090 A	6.3 V @ 0.18 A	5.84	5.45
928-0106	SW-312	6.3 V @ 0.200 A	12.6 V C.T. @ 0.200 A	6.3 V @ 0.40 A	6.27	5.84
928-0107	SW-412	6.3 V @ 0.500 A	12.6 V C.T. @ 0.500 A	6.3 V @ 1.00 A	7.46	6.95
928-0108	SW-512	6.3 V @ 1.000 A	12.6 V C.T. @ 1.000 A	6.3 V @ 2.00 A	7.88	7.35
928-0612	SW-612	6.3 V @ 1.600 A	12.6 V C.T. @ 1.600 A	6.3 V @ 3.20 A	9.61	8.96
928-0110	SW-216	8.0 V @ 0.070 A	16.0 V C.T. @ 0.070 A	8.0 V @ 0.14 A	5.84	5.45
928-0111	SW-316	8.0 V @ 0.150 A	16.0 V C.T. @ 0.150 A	8.0 V @ 0.30 A	6.27	5.84
928-0112	SW-416	8.0 V @ 0.400 A	16.0 V C.T. @ 0.400 A	8.0 V @ 0.80 A	7.46	6.95
928-0113	SW-516	8.0 V @ 0.800 A	16.0 V C.T. @ 0.800 A	8.0 V @ 1.60 A	7.88	7.35
928-0114	SW-616	8.0 V @ 1.250 A	16.0 V C.T. @ 1.250 A	8.0 V @ 2.50 A	9.61	8.96
928-0115	SW-320	10.0 V @ 0.120 A	20.0 V C.T. @ 0.120 A	10.0 V @ 0.24 A	6.27	5.85
928-0117	SW-420	10.0 V @ 0.300 A	20.0 V C.T. @ 0.300 A	10.0 V @ 0.60 A	7.46	6.95
928-0218	SW-520	10.0 V @ 0.600 A	20.0 V C.T. @ 0.600 A	10.0 V @ 1.20 A	8.25	7.69
928-0120	SW-224	12.0 V @ 0.045 A	24.0 V C.T. @ 0.045 A	12.0 V @ 0.09 A	5.84	5.45
928-0121	SW-324	12.0 V @ 0.100 A	24.0 V C.T. @ 0.100 A	12.0 V @ 0.20 A	6.27	5.84
928-0122	SW-424	12.0 V @ 0.250 A	24.0 V C.T. @ 0.250 A	12.0 V @ 0.50 A	7.46	6.95
928-0123	SW-524	12.0 V @ 0.500 A	24.0 V C.T. @ 0.500 A	12.0 V @ 1.00 A	7.89	7.35
928-0127	SW-428	14.0 V @ 0.200 A	28.0 V C.T. @ 0.200 A	14.0 V @ 0.40 A	7.46	6.95
928-0128	SW-528	14.0 V @ 0.420 A	28.0 V C.T. @ 0.420 A	14.0 V @ 0.84 A	7.88	7.35
928-0129	SW-628	14.0 V @ 0.700 A	28.0 V C.T. @ 0.700 A	14.0 V @ 1.40 A	9.61	8.96
928-0137	SW-436	18.0 V @ 0.170 A	36.0 V C.T. @ 0.170 A	18.0 V @ 0.34 A	7.46	6.95
928-0138	SW-536	18.0 V @ 0.350 A	36.0 V C.T. @ 0.350 A	18.0 V @ 0.70 A	7.88	7.35

“Side Winder” Dual 115/230 V, 50/60 Hz, 8 Pin

Note: First digit after “DSW” in Mfr.’s Type indicates size code listed above.

Stock No.	Mfr.'s Type	VA or Watts	Secondary		Wt. Oz.	EACH	
			Series	Parallel		1-49	50-99
928-0200	DSW-210	2	5.0 V @ 0.110 A	10.0 V C.T. @ 0.110 A	4.5	8.96	8.35
928-0201	DSW-310	3	5.0 V @ 0.250 A	10.0 V C.T. @ 0.250 A	4.5	9.05	8.44
928-0206	DSW-312	6	6.3 V @ 0.200 A	12.6 V C.T. @ 0.200 A	5.5	9.70	9.04
928-0207	DSW-412	6	6.3 V @ 0.500 A	12.6 V C.T. @ 0.500 A	5.5	9.70	9.04
928-0512	DSW-512	6	6.3 V @ 1.000 A	12.6 V C.T. @ 1.000 A	5.5	9.70	9.04
928-0209	DSW-612	6	6.3 V @ 1.600 A	12.6 V C.T. @ 1.600 A	5.5	9.70	9.04
928-0210	DSW-216	8	8.0 V @ 0.070 A	16.0 V C.T. @ 0.070 A	5.5	9.70	9.04
928-0212	DSW-416	8	8.0 V @ 0.400 A	16.0 V C.T. @ 0.400 A	5.5	9.70	9.04
928-0213	DSW-516	8	8.0 V @ 0.800 A	16.0 V C.T. @ 0.800 A	5.5	9.70	9.04
928-0211	DSW-316	8	8.0 V @ 0.150 A	16.0 V C.T. @ 1.500 A	5.5	9.70	9.04
928-0214	DSW-616	8	8.0 V @ 1.250 A	16.0 V C.T. @ 1.250 A	5.5	9.70	9.04
928-0216	DSW-320	10	10.0 V @ 0.120 A	20.0 V C.T. @ 0.120 A	11.5	10.33	9.63
928-0217	DSW-420	10	10.0 V @ 0.300 A	20.0 V C.T. @ 0.300 A	11.5	10.32	9.62
928-0218	DSW-520	10	10.0 V @ 0.600 A	20.0 V C.T. @ 0.600 A	11.5	10.32	9.62
928-0219	DSW-620	10	10.0 V @ 1.000 A	20.0 V C.T. @ 1.000 A	11.5	10.33	9.63
928-0221	DSW-324	12	12.0 V @ 0.100 A	24.0 V C.T. @ 0.100 A	11.5	10.33	9.63
928-0222	DSW-424	12	12.0 V @ 0.250 A	24.0 V C.T. @ 0.250 A	11.5	10.33	9.63
928-0223	DSW-524	12	12.0 V @ 0.500 A	24.0 V C.T. @ 0.500 A	11.5	10.33	9.63
928-0224	DSW-624	12	12.0 V @ 0.800 A	24.0 V C.T. @ 0.800 A	11.5	10.33	9.63
928-0225	DSW-228	14	14.0 V @ 0.040 A	28.0 V C.T. @ 0.040 A	11.5	10.33	9.63
928-0226	DSW-328	14	14.0 V @ 0.085 A	28.0 V C.T. @ 0.085 A	11.5	10.33	9.63
928-0228	DSW-528	14	14.0 V @ 0.420 A	28.0 V C.T. @ 0.420 A	11.5	10.33	9.63
928-0235	DSW-236	18	18.0 V @ 0.030 A	36.0 V C.T. @ 0.030 A	11.5	10.33	9.63
928-0237	DSW-436	18	18.0 V @ 0.170 A	36.0 V C.T. @ 0.017 A	11.5	10.33	9.63
928-0238	DSW-536	18	18.0 V @ 0.350 A	36.0 V C.T. @ 0.350 A	11.5	10.33	9.63
928-0239	DSW-636	18	18.0 V @ 0.550 A	36.0 V C.T. @ 0.550 A	11.5	10.33	9.63