


Jumper-Switch™

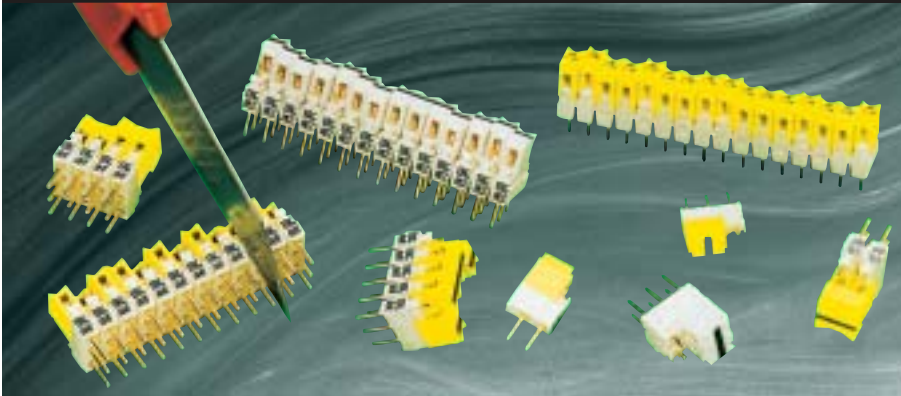

-  Drop in replacement for jumpers.
-  Secured in the ON or OFF setting.
-  0.1" mounting pitch.
-  1 thru 16 ON/OFF, CHANGEOVER and CENTRE-OFF contacts.
-  Ganged pairs of contacts option.
-  Hard gold plated wiping contacts.
-  If you have a volume requirement for a product variant not shown on this sheet please contact us.

A switchable jumper on 0.1" pitch that securely switches PCB track signals with a positive contact action.

Supplied in units of 1 thru 16 poles they provide an alternative to jumpers without the need for 'parking pins' on the PCB or exposed bare pins and are available with ON/OFF (JSA4), CHANGEOVER (JSC4), and CENTRE-OFF (JSK9) switch actions. All contacts can be supplied in ganged pairs. (See ordering code).










Longer units (up to 16 poles) save loading time on production. On development they can be cut with a modelling knife to achieve any combination required to provide flexible switching with the least routing on a PCB.

Options available include 2 pole ganged style, sliders of different colours in the EIA range and a mixture of colours for sliders in multiple way versions and slider numbering.

Reliable switching of the gold over nickel plated phosphor bronze contacts is assured with the 4 point wiping contact design. The contacts never rub over any plastic part and every one is tested before despatch. The positive detent action ensures good shock resistance and the deep 'V' slots securely locate any operating probe.

Jumper-Switch has been designed for use on hand or flow soldered and washed PCBs. The tight pin fit prevents any wicking. Users should evaluate that their particular processes are compatible with the unsealed contact design concept.

Mechanical Details

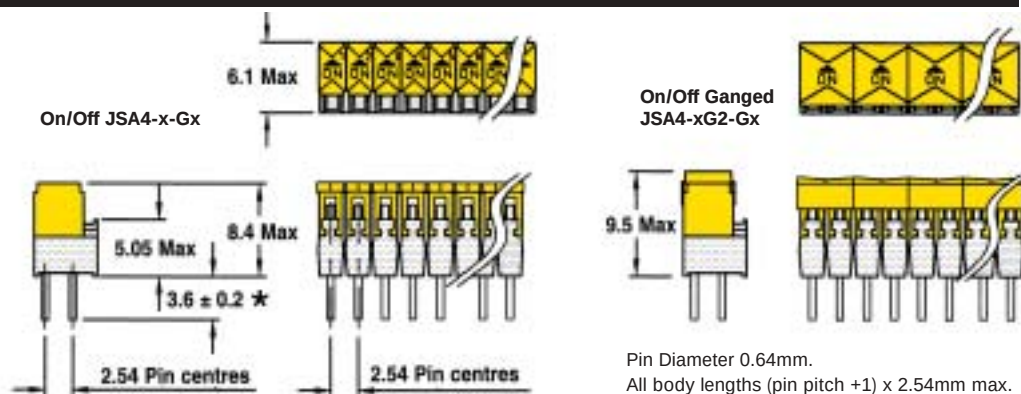

*For alternatives - Please contact Sales Office

Principal Electrical and Performance Data

at 20°C 70% R.H.

Contact Ratings: Non Switching: 100Vac, 5A
Switching: 1μV to 100V, 1μA to 1A 10VA. Contacts are shipped in 'ON' position.

Initial Contact Resistance: (at 10mV, 10mA max.)
Typical: 10mΩ. Max. 15mΩ.

Insulation Resistance: (at 500Vdc min.) 10,000MΩ.

Life: Minimum 1,000 operations.

Dielectric Strength: 1 minute: 500Vrms 50Hz.

Capacitance Between Open Contacts: < 5pf at 1KHz.

Temperature: Operating range for continuous electrical use and manual operation is restricted to -55°C to +85°C for standard products.

Operating Force per pole: Max. 5N.

Humidity: Damp heat steady state: 56 days.

Solderability: < 2 seconds to wet at 235°C as per IEC 68 and BS 2011 Test T, solder bath method.

Resistance to soldering heat as per IEC 68 and BS 2011 10 seconds satisfactory at 260°C when mounted on 1.5mm PCB.

Materials: Slider GF PBT UL94-VO
Switch Body PA/PTFE lubricated - UL94-VO
Contact (moving) CuSnP plated AuCo over 2.5μNi
Contact (fixed) CuZn plated AuCo over 2.5μNi

Please note: BS 2011 is now superseded by BS EN 60068.

Ordering Code Details

	JS	A	4	8	G0
Jumper-Switch™					
2 rows of pins - ON/OFF	A				
3 rows of pins - CHANGEOVER	C				
3 rows of pins - CENTRE-OFF	K				
Slider colour Yellow (standard slider)	4				
Slider colour White (centre - off)	9				
Number(s) of sliders from 1 to 16 OR Number of pairs from 1G2 to 8G2	8				
Optional - numbered sliders	N				
Gold thickness - (Standard 0.1μm)	G0				
(Special 1.0μm)	G1				

ETW Erg Components

Luton Road, Dunstable, Bedfordshire LU5 4LJ England
Telephone: 01582 662241 Fax: 01582 600767

E-mail: info@erg.co.uk <http://www.erg.co.uk>

This leaflet is believed to contain the best information available at the time of printing, but is subject to change without notice. Performance figures, where quoted, are actually estimates based on our experience or that of our customers or statutory authorities. In common with all components reliability varies with many factors, and users are invited to contact us in appropriate cases so that where relevant information is available it may be considered by the user. All supplies are subject to the Company's standard conditions of sale which are available on request.