


LI0201B121R-10

**UNCONTROLLED
DOCUMENT**

PHYSICAL DIMENSIONS:

A	0.60 [.024]	+	0.03 [.001]
B	0.30 [.012]	+	0.03 [.001]
C	0.30 [.012]	+	0.03 [.001]
D	0.15 [.006]	+	0.05 [.002]


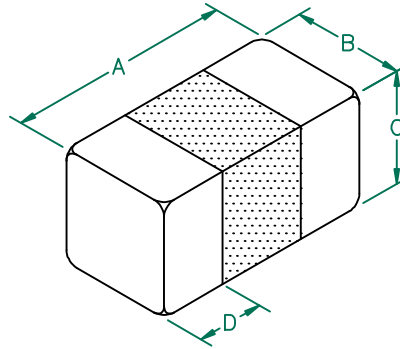


ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	120	
Minimum	90	
Maximum	150	200 mA

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 15,000 PCS/REEL, PAPER TAPE.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

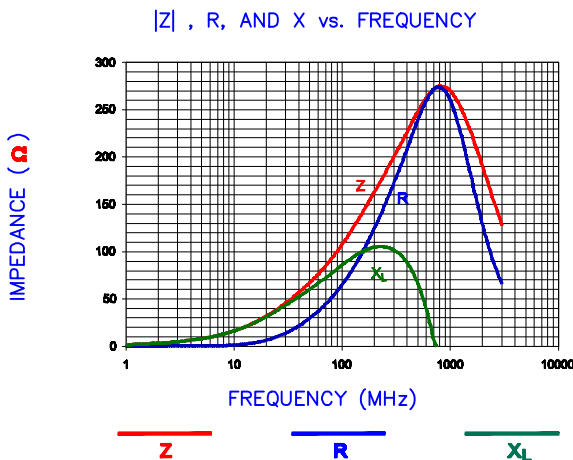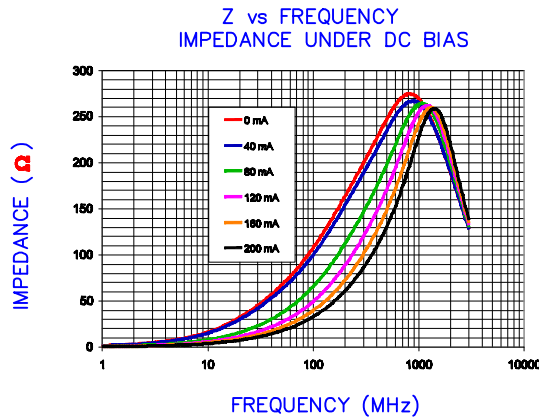

LAND PATTERNS FOR REFLOW SOLDERING

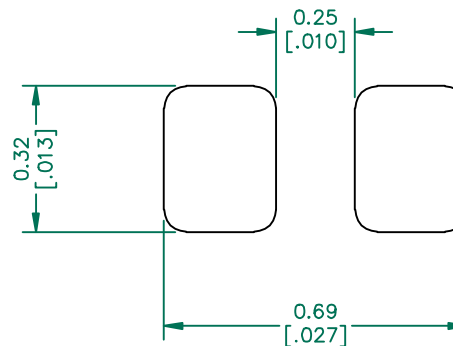

RECOMMENDED SOLDERING CONDITIONS

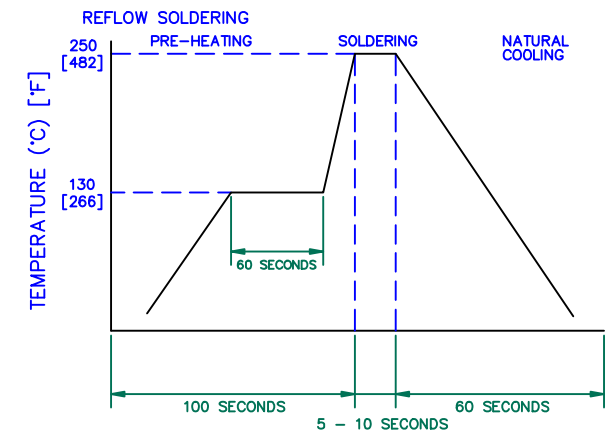

DIMENSIONS ARE IN mm [INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.



PROJECT/PART NUMBER:

LI0201B121R-10

REV

C

PART TYPE:

CO-FIRE

DRAWN BY:

JRK

DATE:

07/07/08

SCALE:

NTS

SHEET:

2 of 2



REV	DESCRIPTION	DATE	INT
C	CORRECT DCR VALUE ADD TEST REF.	09/04/08	JRK
B	ADD CURVES	08/20/08	JRK
A	ORIGINAL DRAFT	07/07/08	JRK
REV	DESCRIPTION	DATE	INT