

96, 64, 32

Number of contacts

DIN 41 612 · Type C


Male connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00
1				
2				
3				


Male connector with angled solder pins

Male connector with straight solder pins

Dimensions

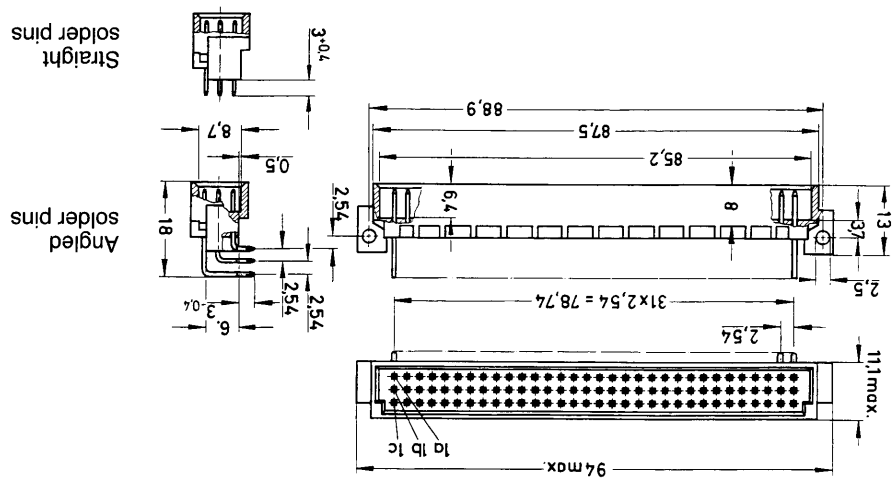

Board drillings

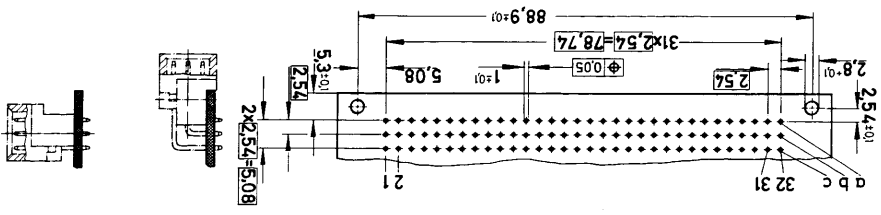

Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]
Other contact arrangements on request
High temperature connectors see chapter 05

Dimensions in mm

