


Triac



30 Ampere/400-600 Volts

OUTLINE DRAWING

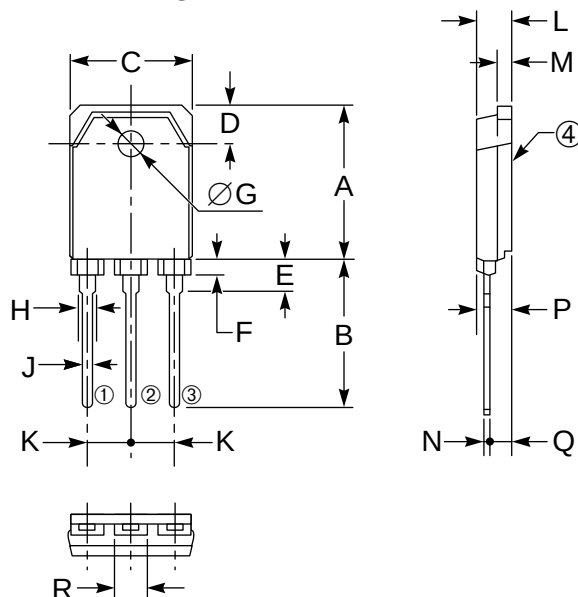

CONNECTION DIAGRAM

- ① T1 TERMINAL
- ② T2 TERMINAL
- ③ GATE
- ④ T2 TERMINAL

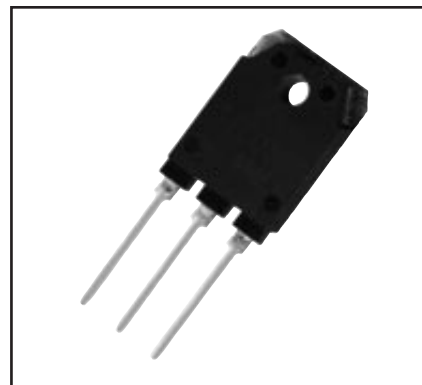

Description:

A triac is a solid state silicon AC switch which may be gate triggered from an off-state to an on-state for either polarity of applied voltage.

Features:

- ☐ Planar Passivation
- ☐ Selected for Inductive Loads

Applications:

- ☐ Contactless AC Switches
- ☐ Microwave Ovens
- ☐ Motor Controls
- ☐ Lighting Controls

Ordering Information:

Example: Select the complete eight, nine or ten digit part number you desire from the table - i.e. BCR30AM-8 is a 400 Volt, 30 Ampere Triac.

Outline Drawing (Conforms to TO-3P)

Dimensions	Inches	Millimeters
A	0.79	20.0
B	0.77	19.5
C	0.63	15.9
D	0.20	5.0
E	0.16	4.0
F	0.08	2.0
G	0.13 Dia.	3.2 Dia.
H	0.08	2.0

Dimensions	Inches	Millimeters
J	0.04	1.0
K	0.21	5.45
L	0.18	4.5
M	0.06	1.5
N	0.02	0.6
P	0.17	4.4
Q	0.11	2.8
R	0.16	4.0

Type	V _{DRM} Volts	Code	Inductive Load*
BCR30AM	400	-8	L
	600	-12	

*For inductive load, add L.

BCR30AM

Triac

30 Ampere/400-600 Volts

Absolute Maximum Ratings, $T_a = 25^\circ\text{C}$ unless otherwise specified

Ratings	Symbol	BCR30AM-8	BCR30AM-12	Units
On-state Current, $T_c = 75^\circ\text{C}$	$I_{T(RMS)}$	30	30	Amperes
Repetitive Peak Off-state Voltage (Gate Open)	V_{DRM}	400	600	Volts
Non-repetitive Peak Off-state Voltage (Gate Open)	V_{DSM}	500	720	Volts
Non-repetitive Peak On-state Voltage, One Cycle (60 Hz)	I_{TSM}	300	300	Amperes
I^2t for Fusing, $t = 8.3$ msec	I^2t	378	378	A^2sec
Peak Gate Power Dissipation, 20 μsec	P_{GM}	5	5	Watts
Average Gate Power Dissipation	$P_{G(avg)}$	0.5	0.5	Watts
Peak Gate Current	I_{GM}	2	2	Amperes
Peak Gate Voltage	V_{GM}	10	10	Volts
Storage Temperature	T_{stg}	-40 to 125	-40 to 125	$^\circ\text{C}$
Operating Temperature	T_j	-40 to 125	-40 to 125	$^\circ\text{C}$
Weight	—	4.8	4.8	Grams

Electrical and Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions (Trigger Mode)				BCR30GM			
		V _D	R _L	R _G	T _j	Min.	Typ.	Max.	Units
Gate Parameters									
DC Gate Trigger Current									
MT2+ Gate+	I _{FGT I}	6V	6Ω	330Ω	25°C	—	—	50	mA
MT2+ Gate–	I _{RGT I}	6V	6Ω	330Ω	25°C	—	—	50	mA
MT2– Gate–	I _{RGT III}	6V	6Ω	330Ω	25°C	—	—	50	mA
DC Gate Trigger Voltage									
MT2+ Gate+	V _{FGT I}	6V	6Ω	330Ω	25°C	—	—	2.5	Volts
MT2+ Gate–	V _{RGT I}	6V	6Ω	330Ω	25°C	—	—	2.5	Volts
MT2– Gate–	V _{RGT III}	6V	6Ω	330Ω	25°C	—	—	2.5	Volts
DC Gate Non-trigger Voltage									
All	V _{GD}	1/2 V _{DRM}	—	—	125°C	0.2	—	—	Volts


Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Junction-to-case	$R_{th(c-f)}$	—	—	—	1.2	$^\circ\text{C/W}$
Voltage – Blocking State Repetitive Off-state Current	I_{DRM}	Gate Open Circuited, $V_D = V_{DRM}$, $T_j = 125^\circ\text{C}$	—	—	3	mA
Current – Conducting State Peak On-state Voltage	V_{TM}	$T_c = 25^\circ\text{C}$, $I_{TM} = 45\text{A}$	—	—	1.6	Volts
Critical Rate-of-Rise of Commutating Off-state Voltage (Commutating dv/dt) ▲ (Switching)	$(dv/dt)_C$	—	—	—	—	$\text{V}/\mu\text{s}$

BCR30AM


Triac

30 Ampere/400-600 Volts


MAXIMUM ON-STATE CHARACTERISTICS

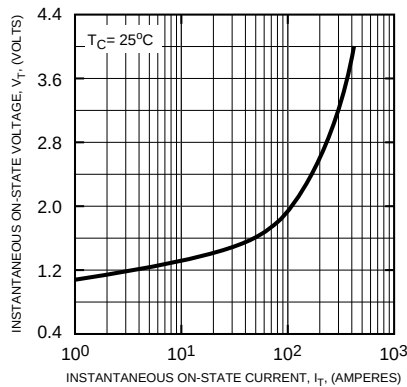


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

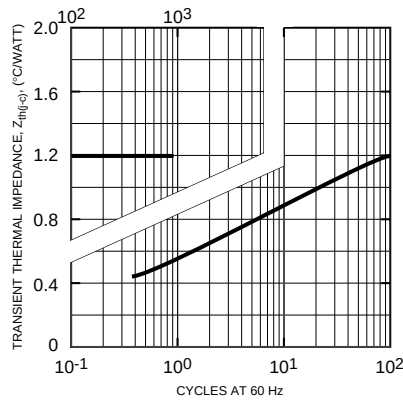


GATE CHARACTERISTICS (I, II, III)

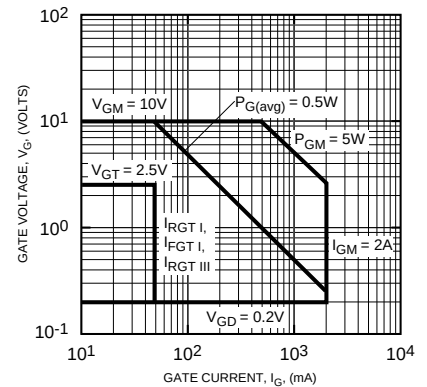


MAXIMUM SURGE CURRENT FOLLOWING RATED LOAD CONDITIONS

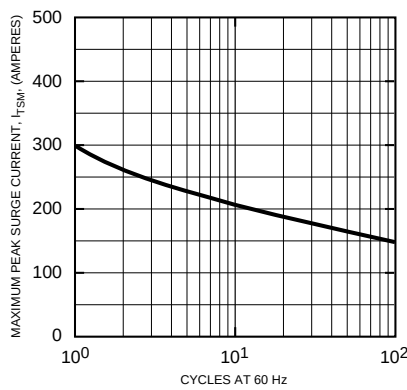


ALLOWABLE CASE TEMPERATURE VS. RMS ON-STATE CURRENT

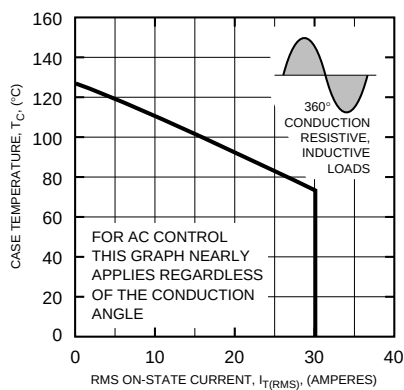


ALLOWABLE AMBIENT TEMPERATURE VS. RMS ON-STATE CURRENT

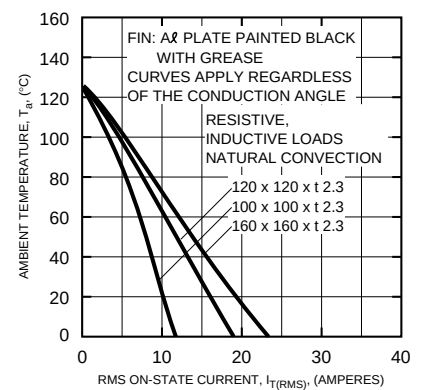


MAXIMUM ON-STATE POWER DISSIPATION

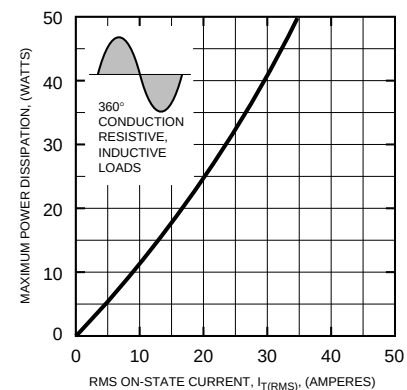

GATE TRIGGER CURRENT VS. JUNCTION TEMPERATURE (TYPICAL)

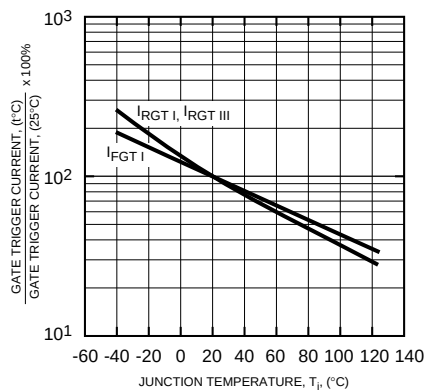







GATE TRIGGER VOLTAGE VS. JUNCTION TEMPERATURE (TYPICAL)

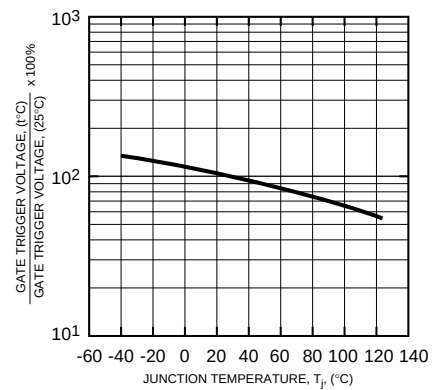


BCR30AM

Triac

30 Ampere/400-600 Volts

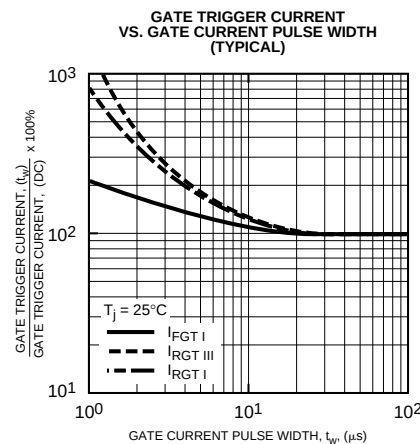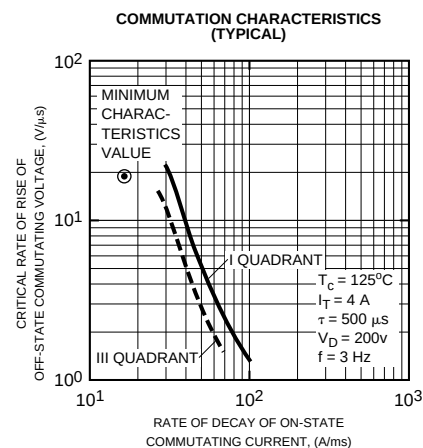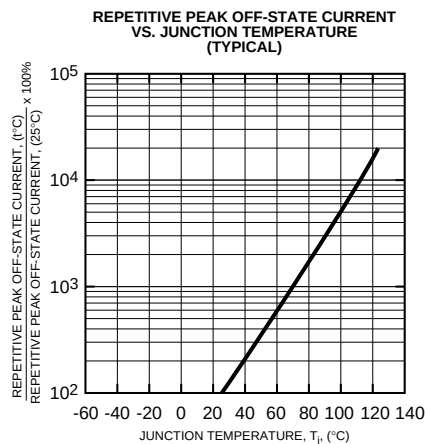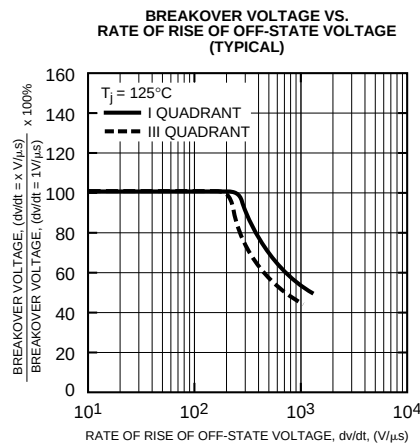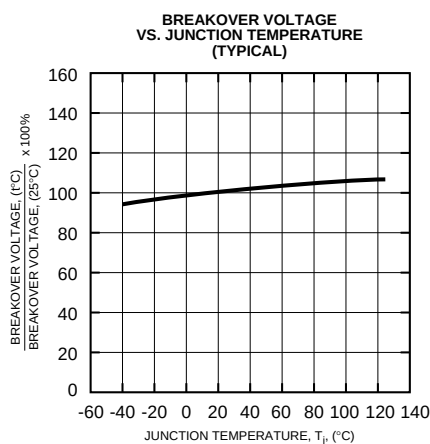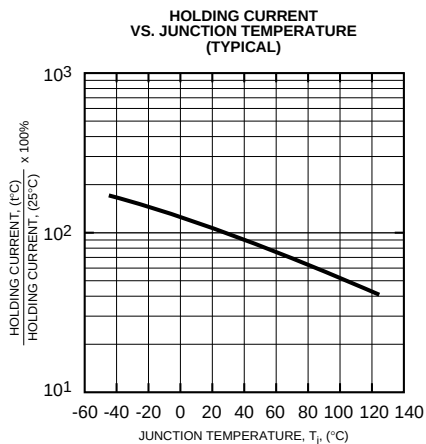

GATE TRIGGER CHARACTERISTICS TEST CIRCUITS

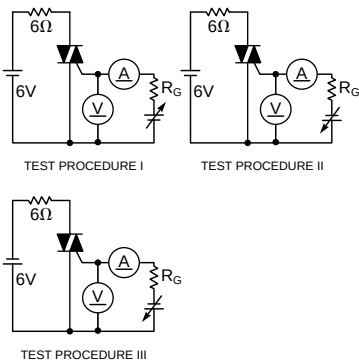

Δ Part Number	V _{DRM} (Volts)	Commutating dv/dt, (dv/dt) _c (V/μsec)		Test Condition	Commutating Voltage & Current Waveform (Inductive Load)
		Minimum			
BCR30AM-8L	400	20		T _J = 125°C,	
BCR30AM-12L	600	20		Rate of Decay	
				On-state	
				Commutating Current	
				(di/dt) _c = -016A/msec,	
				Peak Off-state	
				Voltage	
				V _D = 400V	