
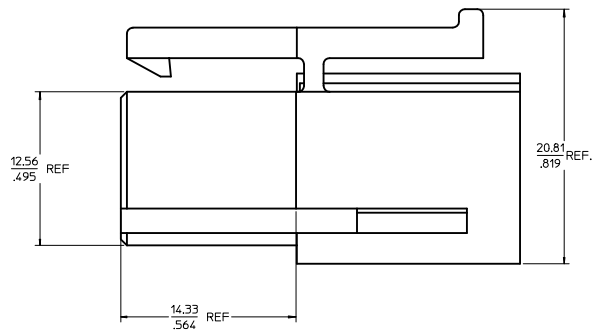
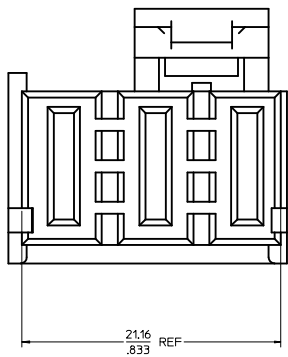
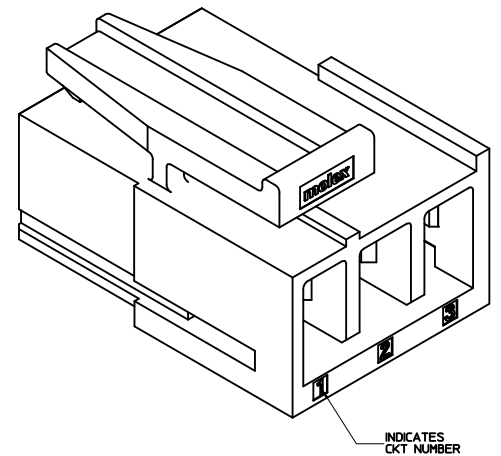
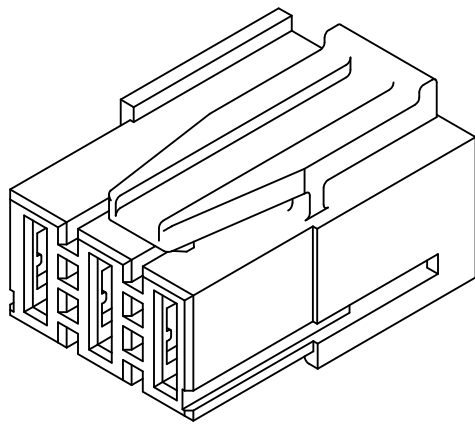



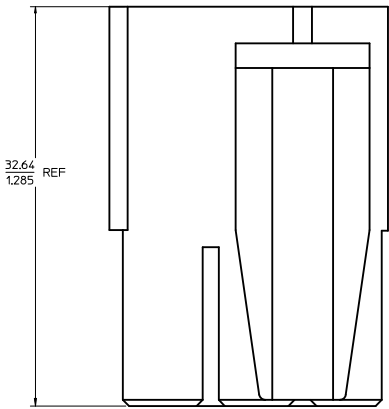


NOTES:


1. MATERIAL:
-HOUSING: HIGH TEMPERATURE PLASTIC BLACK UL-94V-0 (PBT)
2. HOUSING PACKED BULK, MIN ORDER QTY: 100
3. HARNESS HOUSING DESIGN FOR 44262-**** TERMINALS, REFER TO MOLEX DRAWING SD-44262-026
4. PRODUCT MEETS RoHS REQUIREMENTS
5. HARNESS REQUIRES TERMINAL LOCK P/N: 46641-0003, SOLD SEPARATELY
6. MATES TO 76546-0004 TO -0007

REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
			mm	INCH	MM/IN				
1	DRWN: JUILLES 2011/04/26	4 PLACES ± .010	± .010	± .010	4:1	DATE	DATE	DATE	DATE
2	CHKD: APATEL 2011/04/26	3 PLACES ± .010	± .010	± .010	4:1	DATE	DATE	DATE	DATE
3	APPR: APATEL 2011/04/27	2 PLACES ± 0.25	± .010	± .010	4:1	DATE	DATE	DATE	DATE
4		1 PLACE ± 0.25	± .010	± .010	4:1	DATE	DATE	DATE	DATE
5		ANGULAR ± 1/2°			4:1	DATE	DATE	DATE	DATE
6		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			4:1	DATE	DATE	DATE	DATE
7					4:1	DATE	DATE	DATE	DATE
8					4:1	DATE	DATE	DATE	DATE
9					4:1	DATE	DATE	DATE	DATE
10					4:1	DATE	DATE	DATE	DATE
11					4:1	DATE	DATE	DATE	DATE
12					4:1	DATE	DATE	DATE	DATE
13					4:1	DATE	DATE	DATE	DATE
14					4:1	DATE	DATE	DATE	DATE
15					4:1	DATE	DATE	DATE	DATE
16					4:1	DATE	DATE	DATE	DATE
17					4:1	DATE	DATE	DATE	DATE
18					4:1	DATE	DATE	DATE	DATE
19					4:1	DATE	DATE	DATE	DATE
20					4:1	DATE	DATE	DATE	DATE

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

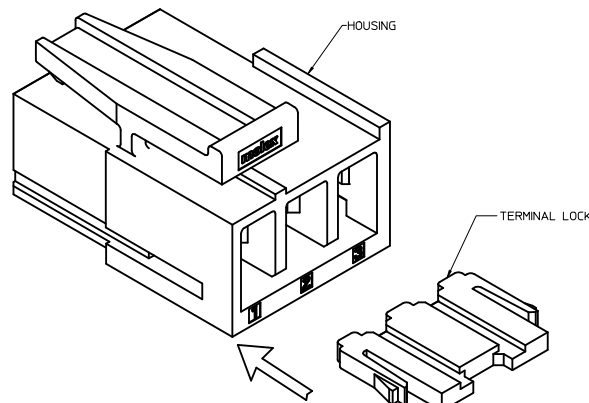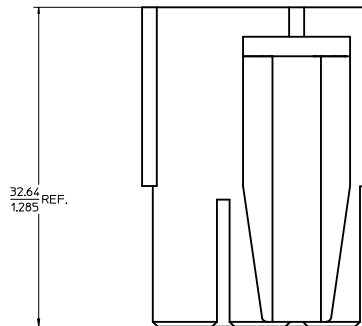

TERMINAL LOCK LOADING DIRECTION
(TERMINAL LOCK INCLUDED IN THE KIT)

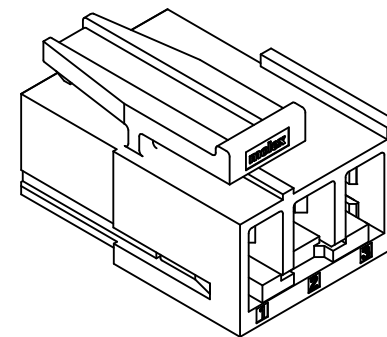

TERMINAL LOCK FULLY SITTED

NOTES:



1. MATERIAL:
-HOUSING: HIGH TEMPERATURE PLASTIC BLACK UL-94V-0 (PBT).
-HARNESS KIT PACKED PER PACKAGING SPEC PK-46586-100.
2. HARNESS HOUSING DESIGN FOR 44262-**** TERMINALS SEE CHART:

USE FOR MATING WITH GOLD PLATED PLUG ASSY ONLY		
P/N:	WIRE SIZE:	PLATING
44262-4632	10/12 OR 2x14	100μ INCHES OF BRIGHT SELECT TIN OVER 50μ INCHES OF NICKEL OVERALL WITH 30μ INCHES OF SELECT GOLD (AT CONTACT)
44262-4636	14/16	

USE FOR MATING WITH TIN PLATED PLUG ASSY ONLY		
P/N:	WIRE SIZE:	PLATING
44262-4402	10/12 OR 2x14	100μ INCHES OF TIN OVER 50μ INCHES OF NICKEL OVERALL
44262-4406	14/16	

REFER TO MOLEX DRAWING SD-44262-100 FOR DETAILS.

4. PRODUCT MEETS RoHS REQUIREMENTS.
5. FOR MATING ASSEMBLY PLEASE CONTACT MOLEX FOR DETAILS.

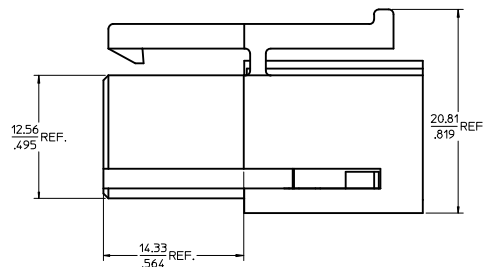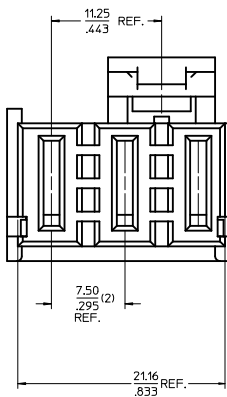

HARNESS KIT P/N:	ONLY 3CKT HOUSING P/N:	ONLY TERMINAL LOCK P/N:
46586-1003	46586-0003	46641-0003

NOTE: EC NO: UCP2011-0070 DRAWN: BKOSTIC 2010/08/13 CHKD: APPR: APATEL 2010/12/16 REV: B3	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM/IN	SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .010 1 PLACE ± 0.25 ± --- ANGULAR ±1/2°	DRAWN BY DATE BKOSTIC 2008/01/28 CHECKED BY DATE BKOSTIC 2008/01/28 APPROVED BY DATE APATEL 2010/12/16	TITLE 3CKT AC HARNESS KIT TEN60 WIRE		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. 46586-1003	MOLEX INCORPORATED	DOCUMENT NO. SD-46586-103	SHEET NO. 1 OF 1
			SIZE D	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1