


Abbr.	TOLERANCE	
	P=0.5	P=1.0
P	±0.05	±0.08
Pt	±0.08	±0.10
W	±0.08	±0.10
M	±0.08	±0.12
Cw	±0.02	±0.03
L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm	

RoHS Compliant	
I	05-AUG-15
H	21-JAN-13
REV	DATE

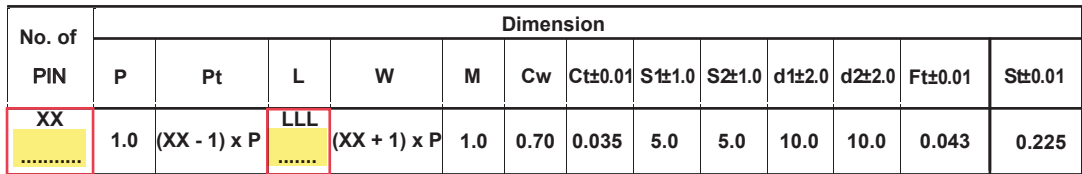

DIMENSION & TOLERANCE
W= (N+1) x P
Pt=(N-1) x P

PROJECTION: 	GENERAL TOLERANCE $.X = +/_ 0.2$ $.XX = +/_ 0.15$		
APPROVAL: GMo	UNIT: MM SCALE: SHEET: 1/2 DRAW: CH	DESCRIPTION: 1.00MM FLAT FLEXIBLE CABLE TYPE 1 XX NB OF PIN: XXXX / LLL OVERALL LENGTH: XXXXXX MM WERI PART NO: 686 XXXX 001 XX LLL	SIZE A4

1				2				3				4				5							
Cautions and Warnings: This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.																				A			
																				B			
																				C			
																				D			
RoHS Compliant								PROJECTION:				GENERAL TOLERANCE											
G								.X = +/- 0.2 .XX = +/- 0.15				UNIT: MM								DESCRIPTION: DISCLAIMER			
F												SCALE:											
E												SHEET: 2/2				WERI PART NO: DISCLAIMER				A4			
D												DRAW: QL											
C				APPROVAL: JC																			
B																							
A	10-SEP-14	PDF	QL																				
REV	DATE	FILE	BY																				