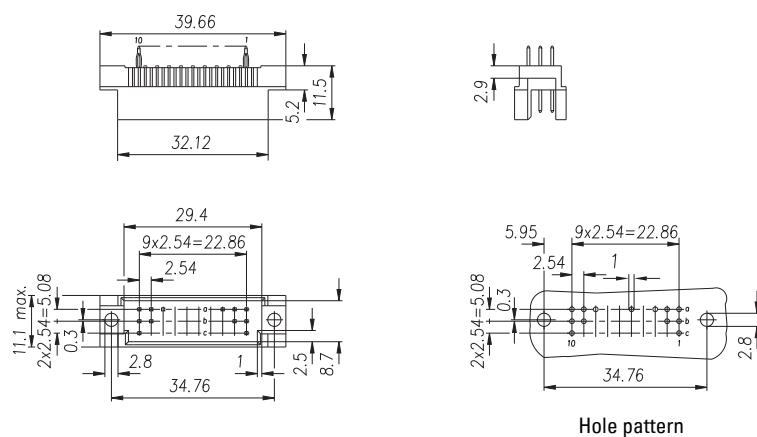



Connectors according to DIN 41612 / IEC 60603-2

Type R/3

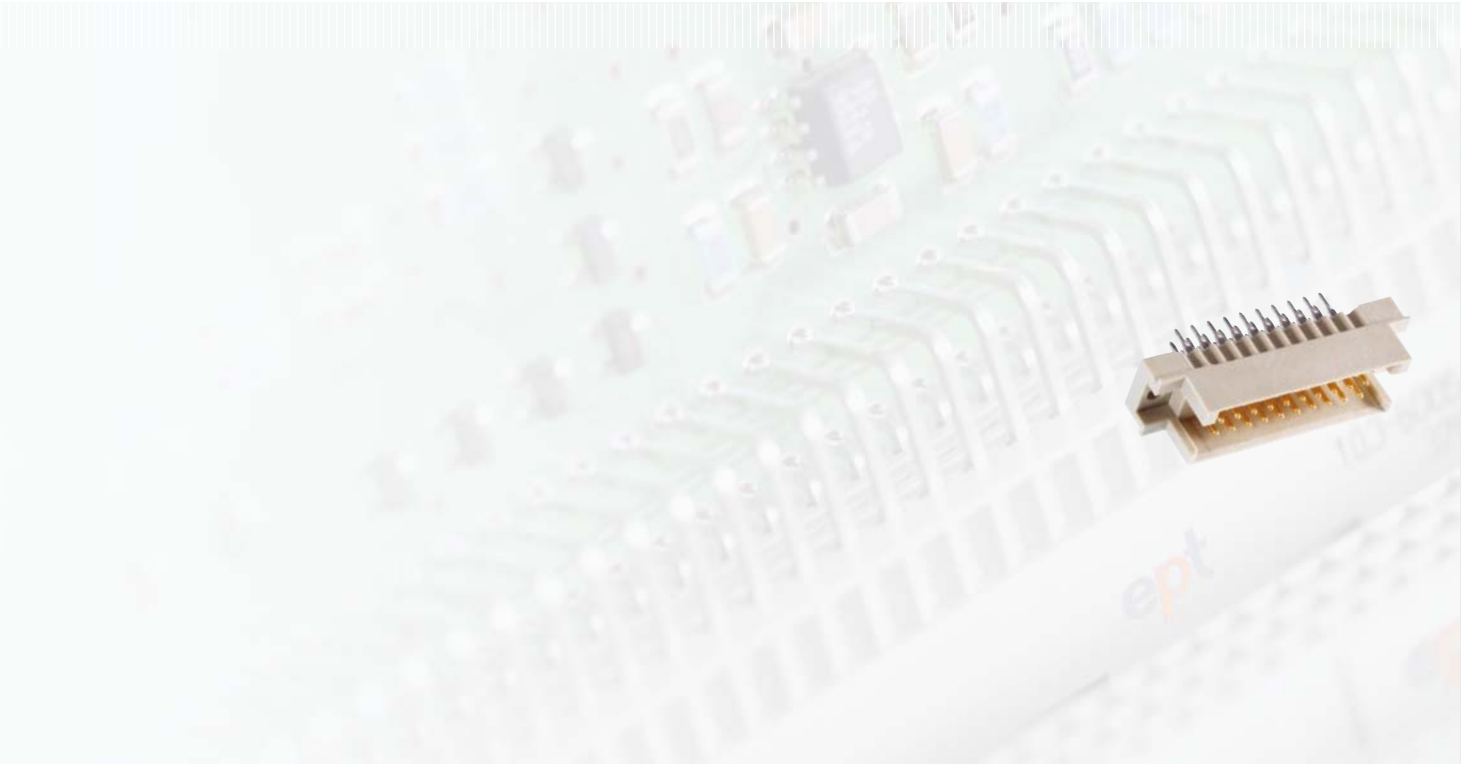
Male connector




Dimensions in mm



No. of contacts	Contact arrangement	Press-fit technology – Performance level II		
		Termination length		
				
Part number				
30		115-68014	115-78015	115-78016

Accessories – Press-fit tool (see page 206) – Support tool (see page 207)	On request – Performance levels I + III or customer-specific – Special contact length – Alternative surface Sn, e.g. for WireWrap	Options – Contact arrangement (see page 162)
Note – * Rear mating zone performance level II		



No. of contacts	Contact arrangement	Solder technology – Performance level II	
		Termination length	
			
Part number			
30		115-80064	115-80065

On request

- Performance levels I + III or customer-specific
- Special contact length
- Also in THTR

Options

- Board lock (see page 159)
- Contact arrangement (see page 162)