



Ultra-Fast Precision TTL Comparators

General Description

The Maxim MXL1016 (10ns typ) and MXL1116 (12ns typ) high-speed, complementary-output comparators are designed specifically to interface directly to TTL logic while operating from either a dual $\pm 5\text{V}$ supply or a single +5V supply.

The MXL1016/MXL1116 remain stable with the outputs in the active region, which greatly reduces output instability common with slow-moving input signals. In addition, an output latch (LE) is provided.

For lower-power, higher-performance comparators, see the MAX912/MAX913 dual/single comparator data sheet. The MAX913 is an improved, plug-in replacement for the MXL1016 and MXL1116, and the MAX912 is the dual equivalent to the MAX913.

Features

- ♦ Ultra Fast (10ns typ)
- ♦ Single +5V or Dual $\pm 5\text{V}$ Supply Operation
- ♦ Input Common-Mode Extends to Negative Supply (MXL1116)
- ♦ Inputs Can Exceed the Positive Supply Up to +15V (MXL1116) Without Damage
- ♦ Complementary TTL Outputs
- ♦ Low Offset Voltage: 1mV
- ♦ No Minimum Input Slew-Rate Requirement
- ♦ No Power-Supply Current Spiking
- ♦ Output Latch

MXL1016/MXL1116


Applications

High-Speed A/D Converters
 Zero-Crossing Detectors
 Current Sense for Switching Regulators
 High-Speed Sampling Circuits
 High-Speed Triggers
 Line Receivers
 Extended Range V/F Converters
 Fast Pulse Height/Width Discriminators

Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
MXL1016CN8	0°C to +70°C	8 Plastic DIP
MXL1016CS8	0°C to +70°C	8 SO
MXL1016MJ8	-55°C to +125°C	8 CERDIP
MXL1116CN8	0°C to +70°C	8 Plastic DIP
MXL1116CS8	0°C to +70°C	8 SO

Pin Configuration

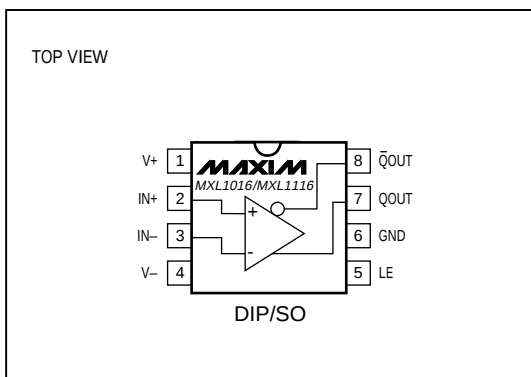

Pin Description

PIN	NAME	FUNCTION
1	V+	Positive Power Supply, +5V
2	IN+	Noninverting Input
3	IN-	Inverting Input
4	V-	Negative Power Supply, -5V for dual supply or GND for single supply
5	LE	Latch Enable, QOUT and $\bar{Q}$ OUT are latched when LE is high
6	GND	Ground
7	QOUT	TTL Output
8	$\bar{Q}$ OUT	Complementary TTL Output



Ultra-Fast Precision TTL Comparators

ABSOLUTE MAXIMUM RATINGS

Positive Supply Voltage.....	7V	Output Current (continuous).....	±20mA
Negative Supply Voltage.....	-7V	Continuous Power Dissipation (T _A = +70°C)	
Differential Input Voltage		Plastic DIP (derate 9.09mW/°C above +70°C)	727mW
MXL1016.....	±5V	SO (derate 5.88mW/°C above +70°C).....	471mW
MXL1116.....	±15V	CERDIP (derate 8.00mW/°C above +70°C)	640mW
Input Voltage (either input)		Operating Temperature Ranges:	
MXL1016.....	Equal to Supplies	MXL1016C/MXL1116C	0°C to +70°C
MXL1116.....	(V ₋ - 0.3V) to 15V	MXL1016MJ	-55°C to +125°C
Latch Pin Voltage	Equal to Supplies	Storage Temperature Range	-65°C to +150°C
		Lead Temperature (soldering, 10sec)	+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS – MXL1016

(V₊ = 5V, V₋ = -5V, V_{OUT} (Q) = 1.4V, V_{LE} = 0V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MXL1016M			MXL1016C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage (Note 1)	V _{OS}	R _S ≤ 100Ω	T _A = +25°C	0.8 ±2			1.0 ±3			mV
Input Offset-Voltage Drift	ΔV _{OS} /ΔT			3			3.5			μV/°C
Input Offset Current (Note 1)	I _{OS}		T _A = +25°C	0.3 1			0.3 1			μA
Input Bias Current (Note 2)	I _B		T _A = +25°C	5 10			5 10			μA
				13			13			
Input Voltage Range	V _{CM}			-3.75 +3.5			-3.75 +3.5			V
		Single 5V supply		+1.25 +3.5			+1.25 +3.5			
Common-Mode Rejection Ratio	CMRR	-3.75V ≤ V _{CM} ≤ 3.5		80 96			80 96			dB
Power-Supply Rejection Ratio	PSRR	Positive supply: 4.6V ≤ V+ ≤ 5.4V		60 75			60 75			dB
		Negative supply: -2V ≥ V- ≥ -7V		80 100			80 100			
Small-Signal Voltage Gain	A _V	1V ≤ V _{OUT} ≤ 2V, T _A = +25°C		1400 3000			1400 3000			V/V
Output High Voltage	V _{OH}	V+ ≥ 4.6V	I _{OUT} = 1mA	2.7 3.4			2.7 3.4			V
			I _{OUT} = 10mA	2.4 3.0			2.4 3.0			
Output Low Voltage	V _{OL}		I _{SINK} = 4mA	0.3 0.5			0.3 0.5			V
			I _{SINK} = 10mA, T _A = +25°C	0.4			0.4			
Positive Supply Current	I+			25 35			25 35			mA
Negative Supply Current	I-			3 5			3 5			mA
Latch Pin High Input Voltage	V _{IH}			2.0			2.0			V
Latch Pin Low Input Voltage	V _{IL}			0.8			0.8			V
Latch Pin Current	I _{IL}	V _{LE} = 0V		-500			-500			μA
Propagation Delay (Note 3)	t _{PD}	ΔV _{IN} = 100mV, OD = 5mV	T _A = +25°C	10 14			10 14			ns
				16			16			
		ΔV _{IN} = 100mV, OD = 20mV	T _A = +25°C	9 12			9 12			
				15			15			
Differential Propagation Delay (Note 3)	Δt _{PD}	ΔV _{IN} = 100mV, OD = 5mV, T _A = +25°C		3			3			ns
Latch Setup Time	t _{SU}	(Note 4)		2			2			ns

Ultra-Fast Precision TTL Comparators

ELECTRICAL CHARACTERISTICS – MXL1116

(V+ = 5V, V- = -5V, V_{OUT} (Q) = 1.4V, V_{LE} = 0V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Specifications for V_{OS}, I_B, CMRR and A_V are valid for single-supply operation, V+ = 5V, V- = 0V.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Offset Voltage (Note 1)	V _{OS}	R _S ≤ 100Ω	T _A = +25°C		1.0	±3	mV
						3.5	
Input Offset-Voltage Drift	ΔV _{OS} /ΔT				5		μV/°C
Input Offset Current (Note 1)	I _{OS}				0.5	2	μA
Input Bias Current, Sourcing (Note 2)	I _B				10	20	μA
Input Voltage Range	V _{CM}			V-		(V+ - 2.5)	V
		Single 5V supply		0		2.5	
Common-Mode Rejection Ratio	CMRR	-5V ≤ V _{CM} ≤ 2.5V		75	90		dB
		0V ≤ V _{CM} ≤ 2.5V, V _S = +5V, 0V		65	90		
Power-Supply Rejection Ratio	PSRR	Positive Supply: 4.6V ≤ V+ ≤ 5.4V		60	75		dB
		Negative Supply: -7V ≤ V- ≤ -2V		80	100		
Small-Signal Voltage Gain	A _V	1V ≤ V _{OUT} ≤ 2V, T _A = +25°C		1400	3000		V/V
Output High Voltage	V _{OH}	I _{SOURCE} = 1mA		2.7	3.4		V
		I _{SOURCE} = 10mA		2.4	3.0		
Output Low Voltage	V _{OL}	I _{SINK} = 4mA			0.3	0.5	V
		I _{SINK} = 10mA, T _A = +25°C			0.4		
Positive Supply Current	I+				27	38	mA
Negative Supply Current	I-				5	7	mA
Latch Pin High Input Voltage	V _{IH}			2.0			V
Latch Pin Low Input Voltage	V _{IL}					0.8	V
Latch Input Current	I _{IL}	V _{LE} = 0V			-20	-500	μA
Propagation Delay (Note 3)	t _{PD}	ΔV _{IN} = 100mV, OD = 5mV	T _A = +25°C		12	16	ns
						18	
		ΔV _{IN} = 100mV, OD = 20mV	T _A = +25°C		10	14	
						16	
Differential Propagation Delay (Note 3)	Δt _{PD}	ΔV _{IN} = 100mV, OD = 5mV, T _A = +25°C				3	ns
Latch Setup Time (Note 4)	t _{SU}				2		ns
Latch Hold Time (Note 4)	t _H				2		ns

Note 1: Input offset voltage is defined as the average of the two input offset voltages, measured by forcing first one output, then the other to 1.4V. Input offset current is defined in the same way.

Note 2: Input bias current (I_B) is defined as the average of the two input currents.



Note 3: t_{PD} and Δt_{PD} cannot be measured in automatic handling equipment with low values of overdrive. Correlation tests have shown that t_{PD} and Δt_{PD} limits shown can be guaranteed by design, if additional DC tests are performed to guarantee that all internal bias conditions are correct. For low overdrive conditions, V_{OS} is added to overdrive.

Note 4: Input latch setup time, t_{SU}, is the interval in which the input signal must be stable prior to asserting the latch signal. The hold time, t_H, is the interval after the latch is asserted in which the input signal must be stable.

MXL1016/MXL1116

Ultra-Fast Precision TTL Comparators

Package Information

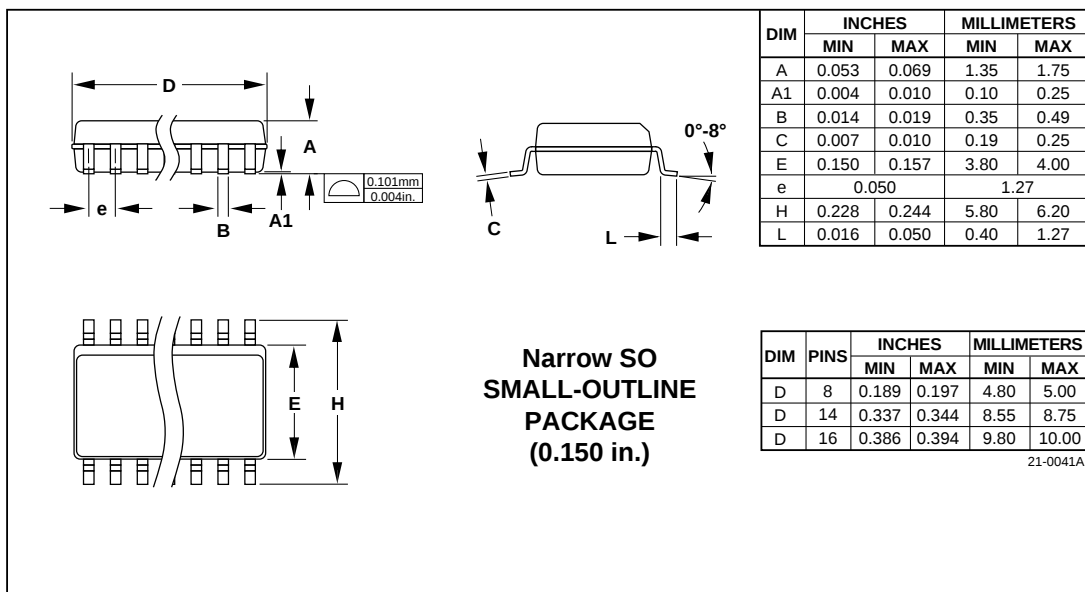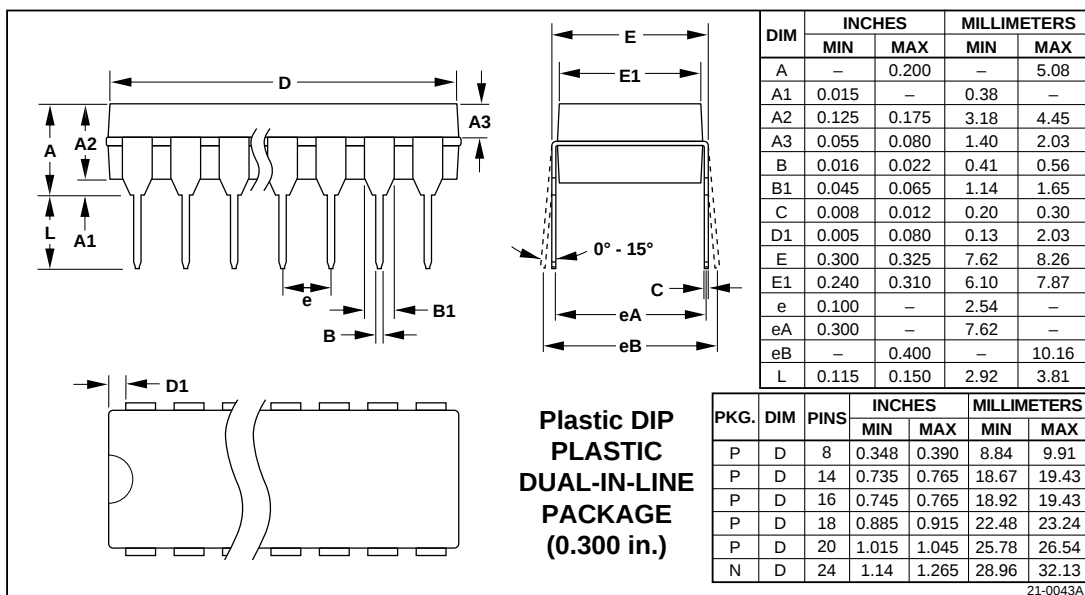

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

4 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

© 1995 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products.