REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
02 14	REVISED PER ECN 99-0001	DM 5/13/99	S. Morby 5/18/99

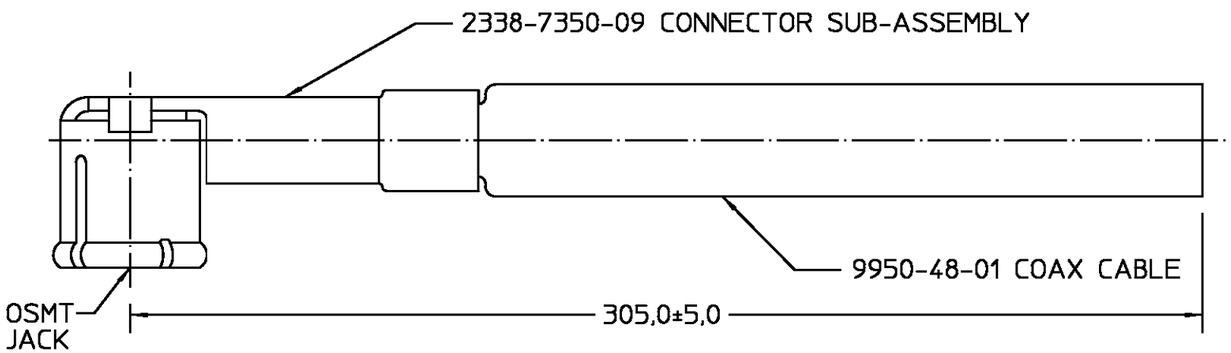

COMPONENT	MATERIAL	FINISH
OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
CABLE: JACKET	POLYVINYLCHLORIDE	N/A
SHIELD	TINNED COPPER WIRE, 38 AWG	N/A
DIELECTRIC	FLUORINATED ETHYLENE PROPYLENE (FEP)	N/A
CENTER CONDUCTOR	TINNED COPPER CLAD STEEL	N/A

ELECTRICAL

Frequency	DC - 6 GHz
Nominal Impedance	50 ohms
Voltage Rating	250 Volts (VRMS Max.) @ Sea Level
VSWR	1.20:1 Max. @ 2GHz 1.40:1 Max. @ 6GHz
Insulation Resistance	1000 Megohms Minimum
Dielectric Withstanding Voltage	500 Volts (VRMS Minimum) @ Sea Level

MECHANICAL

Connector Durability	100 mating cycles

ENVIRONMENTAL

Temperature Rating	-40°C(-40°F) To +105°C(221°F)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM
TOLERANCE ON
FRAC. ± 1/64 DEC. ±0,13 ANGLES ± 1°

DRAWN BY P.RESNICK DATE 24MAY91
CHECKED BY
APP'D BY P.Resnick 05/13/92

These drawings and specifications are the property of AMP Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.

USE ASS'Y PROCEDURE

NO. A.P. N/A

AMP Incorporated
140 Fourth Avenue
Waltham, MA 02451-7599

TITLE OSMT RIGHT ANGLE JACK CABLE PIGTAIL

SIZE	CODE IDENT NO.		REV
B	26805	9950-2305-23	02 14

SCALE 10:1 SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1064338-1
SHEET 1 OF 1 REV A