

REED SWITCH

ORD324H

General purpose miniature-type, long lead

■ GENERAL DESCRIPTION


The ORD324H is a small single-contact reed switch designed for general control of low-level loads less than 200V. The contacts are sealed within the glass tube with inert gas to maintain contact reliability.

■ FEATURES

- (1) Hermetically sealed within a glass tube with inert gas, reed contacts are not influenced by the external atmospheric environment.
- (2) Quick response
- (3) Comprising of operating parts and electrical parts arranged coaxially, reed switches are suited to high-frequency applications.
- (4) Compact and light weight.
- (5) Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life.
- (6) Economically and easily becomes a proximity switch when paired with a magnet.

3

■ EXTERNAL DIMENSIONS (Unit: mm)

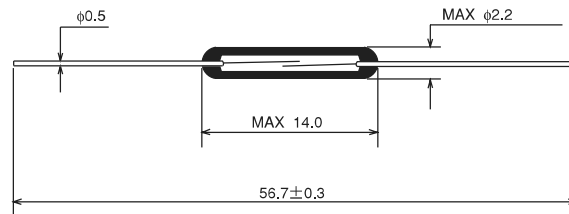

■ APPLICATIONS


- Automotive electronic devices
- Control equipment
- Communication equipment
- Measurement equipment
- Household appliances

■ ELECTRICAL CHARACTERISTICS


Parameter	Rated value	Unit
Pull-in Value (PI)	10~40	AT
Drop-out Value (DO)	3min	AT
Contact Resistance (CR)	100max	mΩ
Breakdown Voltage	250min	VDC
Insulation Resistance	10 ¹⁰ min	Ω
Electrostatic Capacitance	0.3max	pF
Contact Rating	10	VA
Maximum Switching Voltage	200DC	V
	150AC	V
Maximum Switching Current	0.5	A
Maximum Carry Current	1.0	A

3


(1) Pull-in Value vs. Drop-out Value

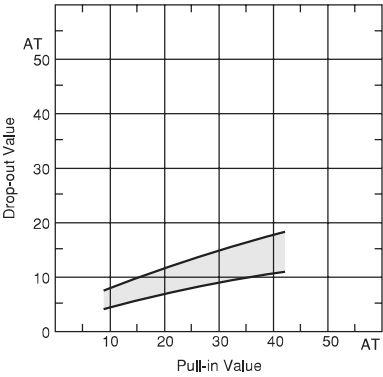


(2) Contact Resistance

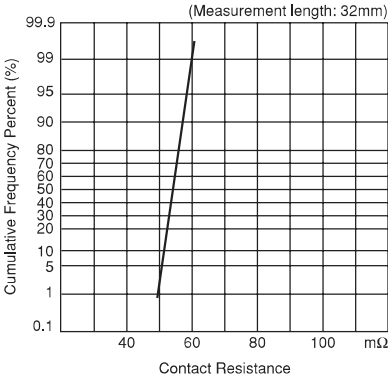

(3) Breakdown Voltage

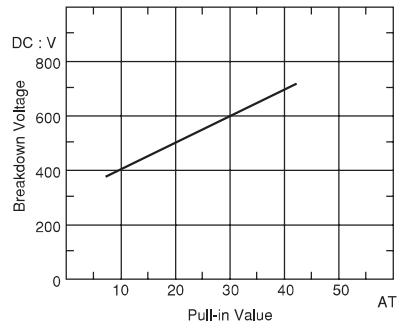


(4) Insulation Resistance

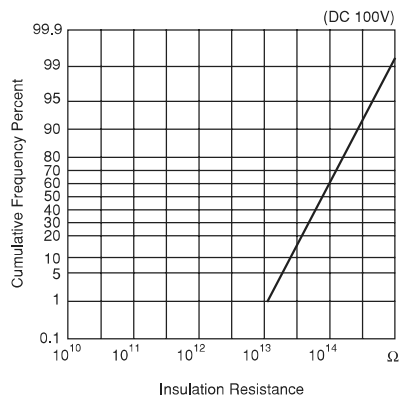

3


(5) Electrostatic Capacitance

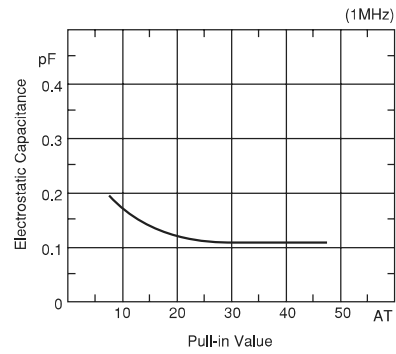


■ OPERATING CHARACTERISTICS

Parameter	Rated Value	Unit
Operate Time	0.4max	ms
Bounce Time	0.3max	ms
Release Time	0.05max	ms
Resonant Frequency	5000±400	Hz
Maximum Operating Frequency	500	Hz


(1) Operate Time

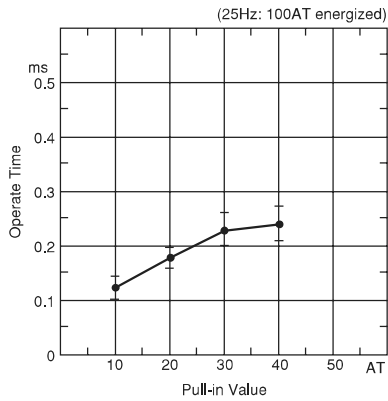


(2) Bounce Time

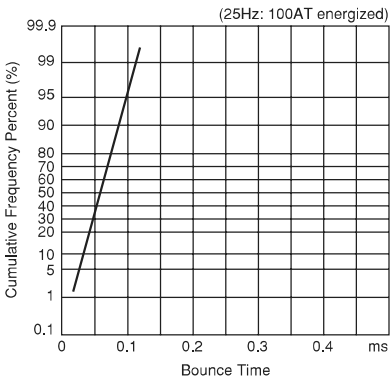

(3) Release Time

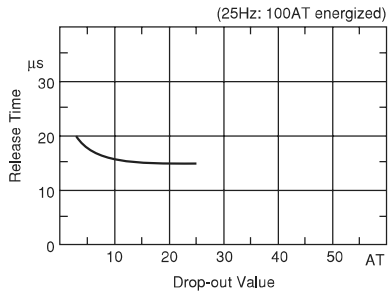


(4) Resonant Frequency

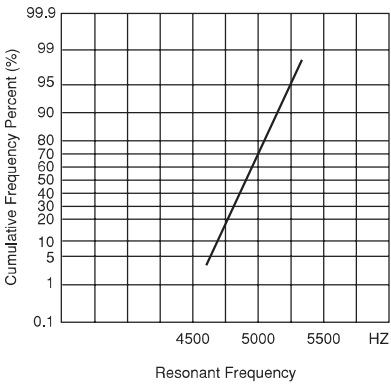


■ MECHANICAL CHARACTERISTICS

(1) Lead Tensile Test (Static Load)

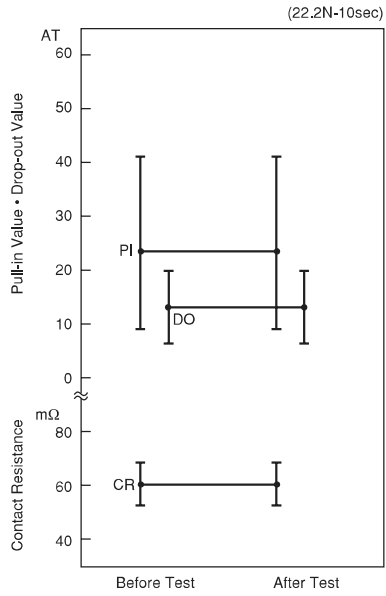


(2) Lead Tensile Strength

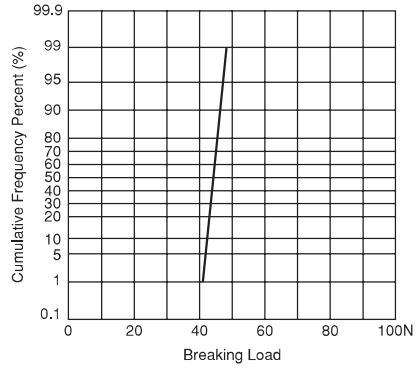

3


■ ENVIRONMENTAL CHARACTERISTICS

(1) Temperature Characteristics

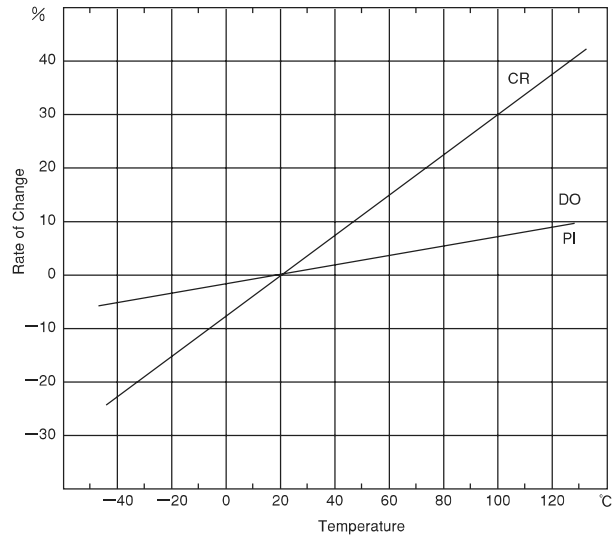


3


(2) Temperature Cycle

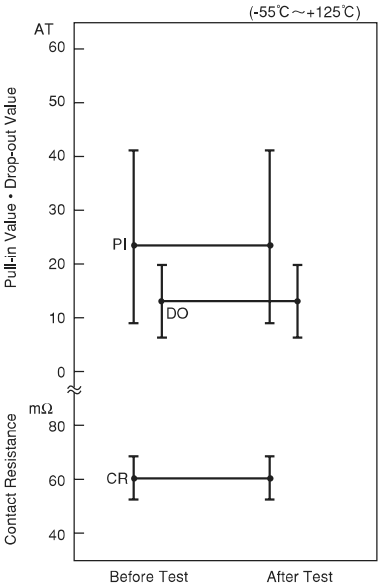


(3) Temperature and Humidity Cycle

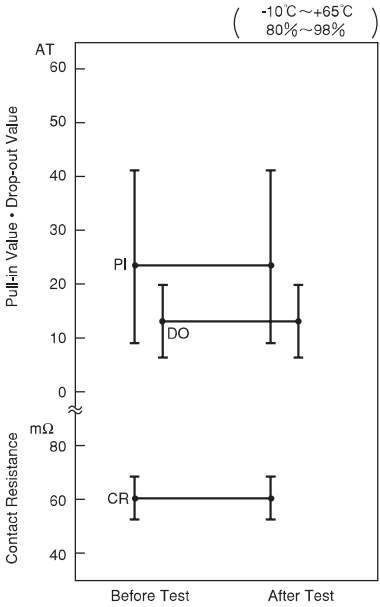

(4) High Temperature Storage Test

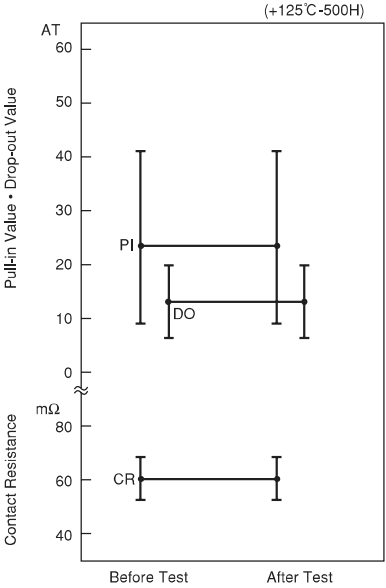


(5) Low Temperature Storage Test

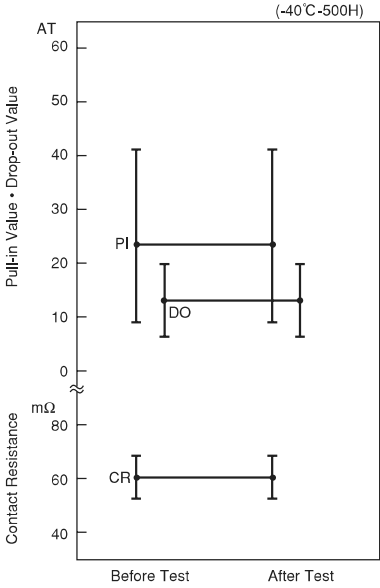


(6) Shock Test

1) Electrical Characteristics

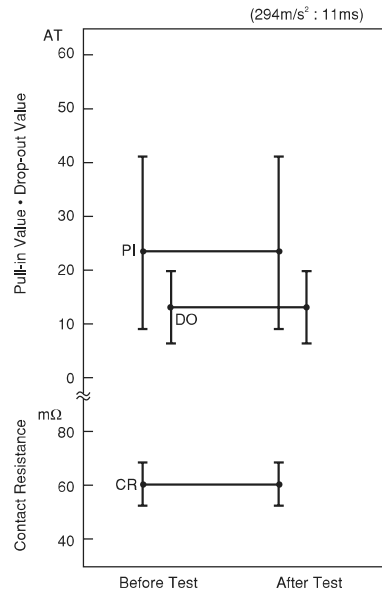


2) Misoperation Area

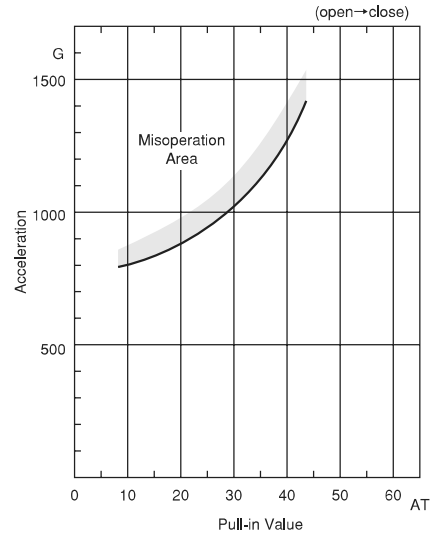


3

(7) Vibration Test

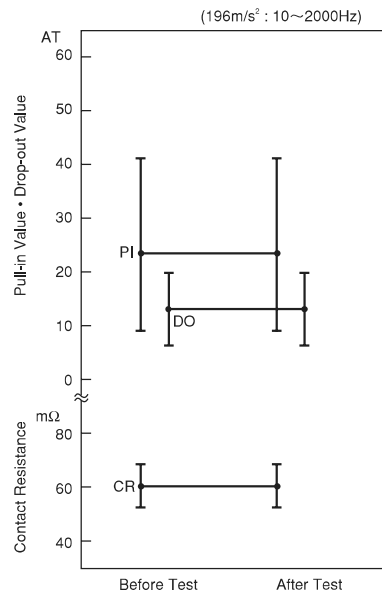

■ LIFE EXPECTANCY DATA: ORD324H


Load Conditions
Voltage: 3VDC
Current: 3mA, 10mA, 30mA
Load: Resistive Load

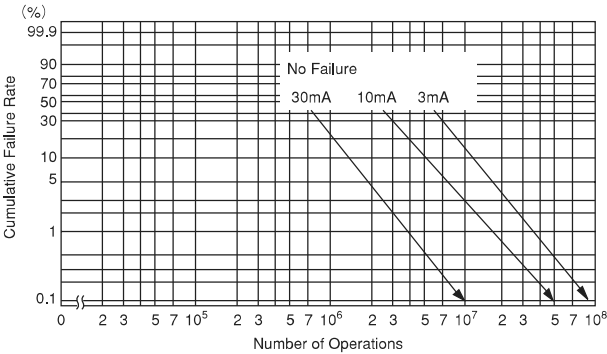

* Arrow indicates number of operations where test was completed.

3

Load Conditions
Voltage: 5VDC
Current: 1mA, 5mA, 10mA
Load: Resistive Load

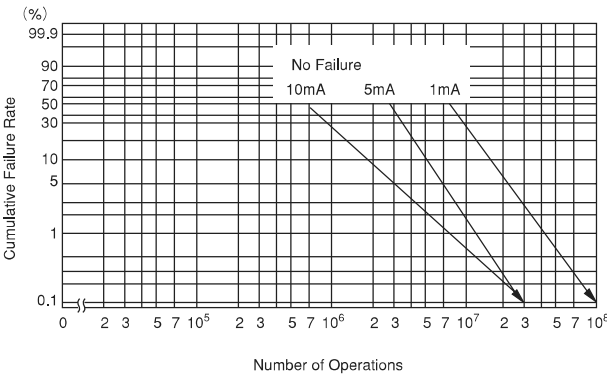

Load Conditions
Voltage: 24VDC
Current: 100mA, 200mA, 400mA
Load: Resistive Load

