




High Grade Standard Type, For Audio Equipment



- "Fine Gold" MUSE acoustic series suited for high grade audio equipment, using state of the art etching techniques.
- Rich sound in the bass register and clearer high end, most suited for AV equipment like DVD.
- Compliant to the RoHS directive (2011/65/EU).


KZ High Grade **FG** High Grade FW

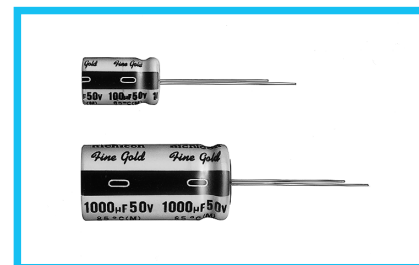

Specifications

Item	Performance Characteristics
Category Temperature Range	-40 to +85°C
Rated Voltage Range	6.3 to 100V
Rated Capacitance Range	0.1 to 10000µF
Capacitance Tolerance	±20% at 120Hz, 20°C
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (µA) , whichever is greater.
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C
	Rated voltage (V)
	tan δ (MAX.)
Stability at Low Temperature	Measurement frequency : 120Hz
	Rated voltage (V)
	Impedance ratio ZT / Z20 (MAX.)
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C.
	Capacitance change
	tan δ
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.
Marking	Printed with black color letter on gold sleeve.


Radial Lead Type

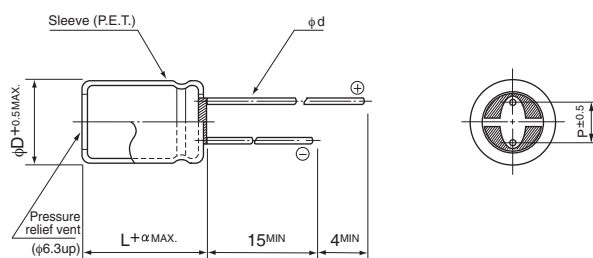

	5	6.3	8	10	12.5	16	18
φD	2.0	2.5	3.5	5.0	5.0	7.5	7.5
P	0.6	0.6	0.6	0.6	0.8	0.8	0.8
φd	0.6	0.6	0.6	0.6	0.8	0.8	0.8

α	(L < 20) 1.5
	(L ≥ 20) 2.0

Type numbering system (Example : 10V 47µF)

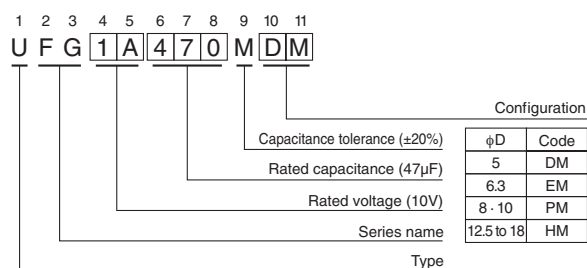

Configuration	φD	Code
Capacitance tolerance (±20%)	5	DM
Rated capacitance (47µF)	6.3	EM
Rated voltage (10V)	8 - 10	PM
Series name	12.5 to 18	HM

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

• Dimension table in next page.

■ Dimensions

V		6.3		10		16		25		35		50	
Cap.(μF)	Code	0J		1A		1C		1E		1V		1H	
0.1	0R1											5 × 11	1.1
0.22	R22											5 × 11	2.4
0.33	R33											5 × 11	3.6
0.47	R47											5 × 11	5.0
1	010											5 × 11	9.0
2.2	2R2											5 × 11	18
3.3	3R3											5 × 11	22
4.7	4R7											5 × 11	27
10	100											5 × 11	39
22	220							5 × 11	50	6.3 × 11	60	6.3 × 11	65
33	330					5 × 11	57	6.3 × 11	70	6.3 × 11	75	8 × 11.5	93
47	470			5 × 11	60	6.3 × 11	74	6.3 × 11	85	8 × 11.5	101	8 × 11.5	111
100	101			6.3 × 11	99	8 × 11.5	128	8 × 11.5	140	10 × 12.5	176	10 × 16	215
220	221			8 × 11.5	170	10 × 12.5	226	10 × 16	260	10 × 20	320	12.5 × 20	390
330	331			10 × 12.5	247	10 × 16	309	10 × 20	351	12.5 × 20	446	12.5 × 20	488
470	471	10 × 12.5	270	10 × 16	330	10 × 20	406	12.5 × 20	476	12.5 × 25	590	16 × 25	650
1000	102	10 × 20	485	12.5 × 20	601	12.5 × 25	723	16 × 25	854	16 × 25	1060	16 × 31.5	1143
2200	222	12.5 × 25	867	16 × 25	1047	16 × 25	1290	16 × 35.5	1570	18 × 35.5	1840		
3300	332	16 × 25	1135	16 × 31.5	1520	16 × 35.5	1720	18 × 40	1794				
4700	472	16 × 31.5	1431	16 × 35.5	1840	18 × 35.5	2140						
6800	682	18 × 35.5	1810	18 × 40	2049								
10000	103	18 × 40	2100										

V		63		80		100	
Cap.(μF)	Code	1J		1K		2A	
0.1	0R1					5 × 11	2.3
0.22	R22					5 × 11	5.5
0.33	R33					5 × 11	8.0
0.47	R47					5 × 11	10
1	010					5 × 11	15
2.2	2R2					5 × 11	22
3.3	3R3					5 × 11	27
4.7	4R7					5 × 11	36
10	100	6.3 × 11	50	6.3 × 11	55	8 × 11.5	65
22	220	8 × 11.5	85	8 × 11.5	100	10 × 12.5	110
33	330	8 × 11.5	105	10 × 12.5	130	10 × 16	150
47	470	10 × 12.5	140	10 × 16	170	10 × 20	190
100	101	10 × 20	255	12.5 × 20	270	12.5 × 20	300
220	221	12.5 × 20	420	12.5 × 25	490	16 × 25	549
330	331	12.5 × 25	541	16 × 31.5	650	16 × 31.5	734
470	471	16 × 25	840	16 × 35.5	920	18 × 35.5	980
1000	102	18 × 35.5	1400			Case size φD × L (mm)	Rated ripple

Rated ripple current (mA rms) at 85°C 120Hz

● Frequency coefficient of rated ripple current

Cap.(μF)	50Hz	120Hz	300Hz	1kHz	10kHz or more
0.1 to 47	0.75	1.00	1.35	1.57	2.00
100 to 470	0.80	1.00	1.23	1.34	1.50
1000 to 10000	0.85	1.00	1.10	1.13	1.15