


5-V Voltage Regulator

TLE 4285 G

Features

- 15 mA current capability
- Low quiescent current consumption
- Power fail output
- Wide operation range: up to 45 V
- Wide temperature range: -40 °C to 150 °C
- Output protected against short circuit
- Overtemperature protection
- Very small SMD-Package P-SCT-595-5

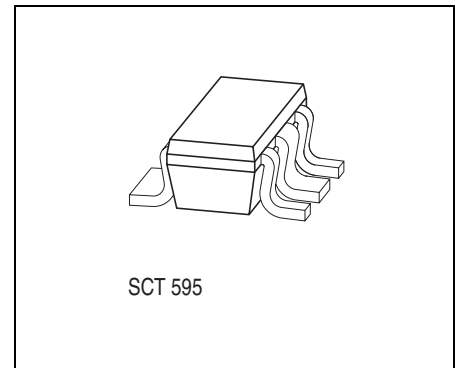

Functional Description

The **TLE 4285 G** is a 5-V fixed voltage regulator in a very small SMD package P-SCT-595-5. The maximum input voltage is 45 V. The output is able to drive an output current of more than 15 mA while it regulates the output voltage within a 4% accuracy.

The Power Fail Output (open collector) is switched to low in case of under-voltage at the output pin. To reduce external components the Power Fail Output has an internal pull-up resistor of 50 kΩ which is connected to the output Q.

The device incorporates a temperature protection that disables the circuit at overtemperature.

Type	Ordering Code	Package
TLE 4285 G	Q67006-A9328	P-SCT-595-5

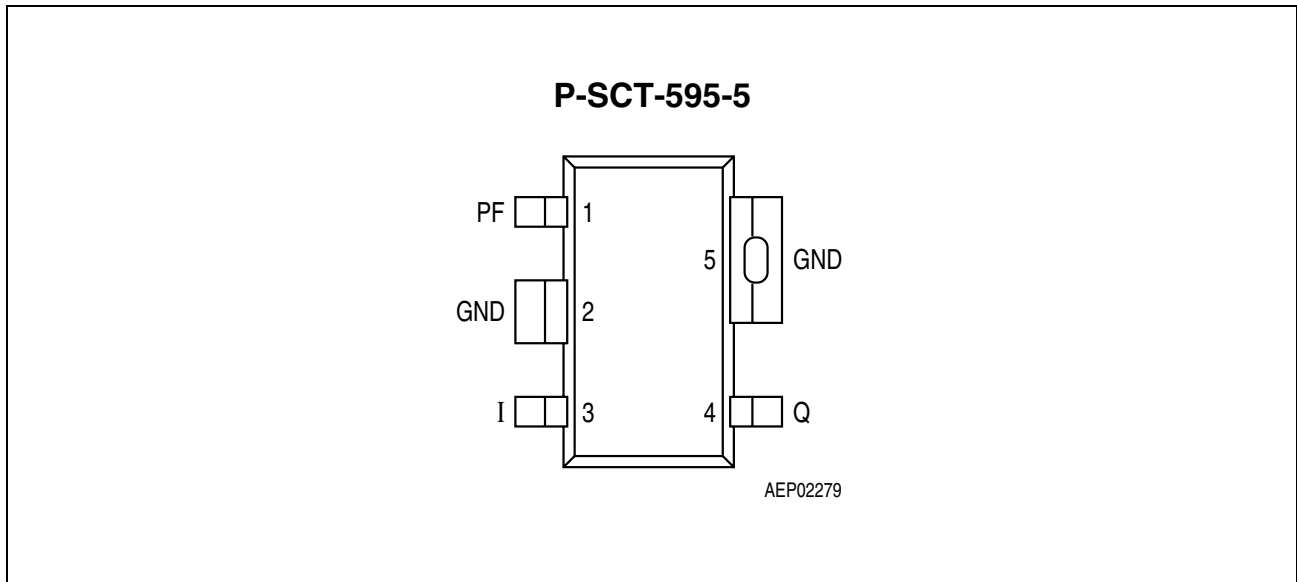


Figure 1 Pin Configuration (top view)

Table 1 Pin Definitions and Functions

Pin No.	Symbol	Function
1	PF	Power Fail ; L for under-voltage; internally connected to Q via 50 kΩ pull-up resistor
2	GND	Ground ; internally connected to pin 5
3	I	Input voltage
4	Q	Output voltage ; must be blocked by a capacitor $C_Q \geq 1 \mu\text{F}$, $\text{ESR} \leq 10 \Omega$ to GND
5	GND	Ground ; internally connected to pin 2

Functional Block Diagram

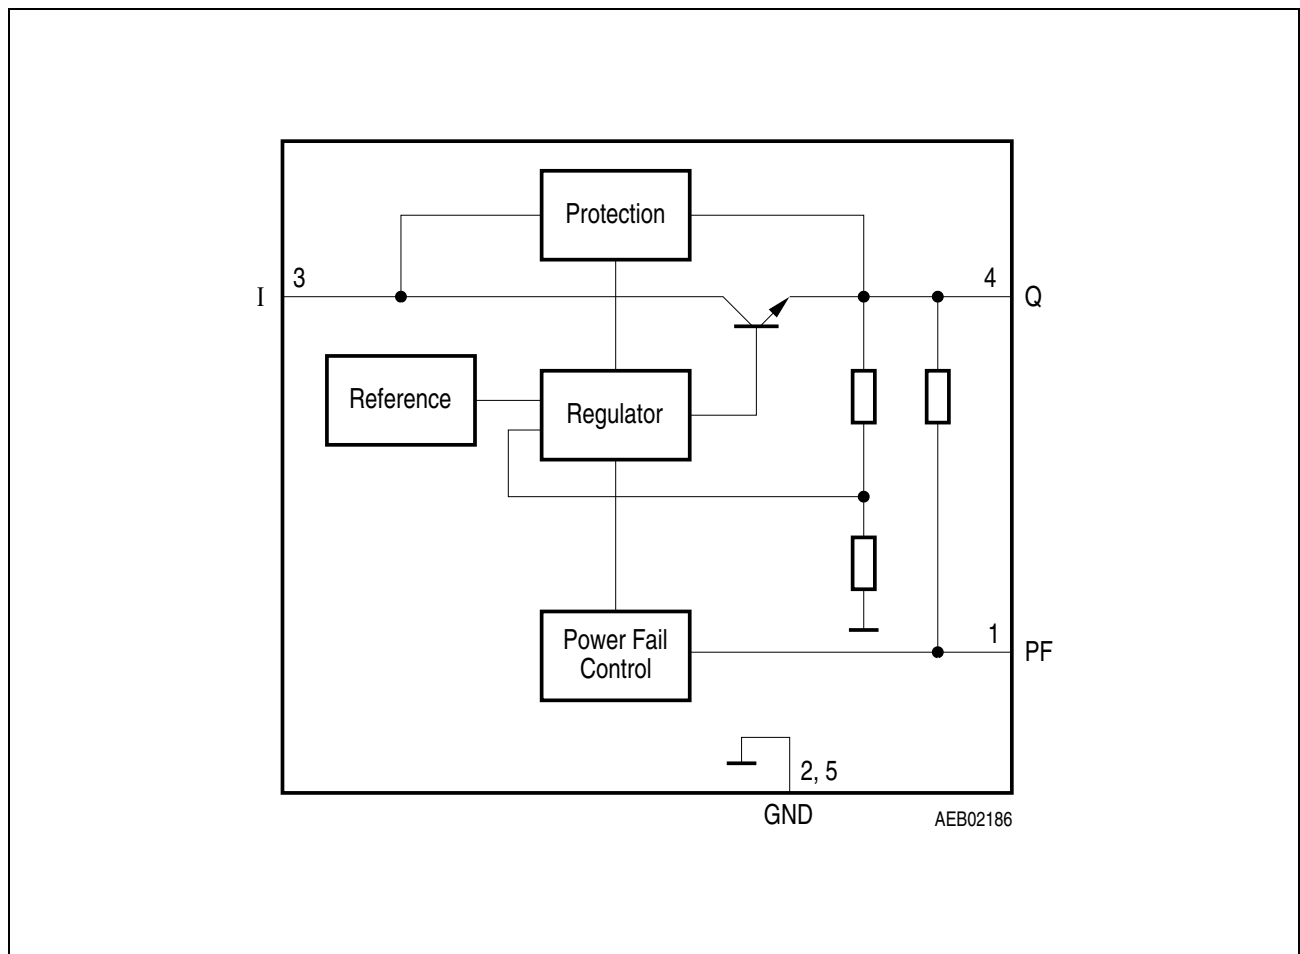


Figure 2 **Block Diagram**

Table 2 Absolute Maximum Ratings
 $-40\text{ }^{\circ}\text{C} < T_j < 150\text{ }^{\circ}\text{C}$

Parameter	Symbol	Limit Values		Unit	Remarks
		Min.	Max.		
Input					
Voltage	V_I	-0.3	45	V	–
Current	I_I	-20	*	mA	* internally limited
Output					
Voltage	V_Q	-0.3	16	V	–
Current	I_Q	-20	*	mA	* internally limited
Power Fail					
Voltage	V_{PF}	-0.3	45	V	–
Current	I_{PF}	-500	*	μ A	* internally limited
Temperatures					
Junction temperature	T_j	-40	150	°C	–
Storage temperature	T_{stg}	-50	150	°C	–
Thermal Resistances					
Junction pin	$R_{thj-pin}$	–	30	K/W	measured to pin 5
Junction ambient	R_{thj-a}	–	55	K/W	1)

1) Package mounted on PCB $40 \times 40 \times 1.5\text{ mm}^3/6\text{ cm}^2\text{ Cu}$.

Note: Maximum ratings are absolute ratings; exceeding any one of these values may cause irreversible damage to the integrated circuit.

Table 3 Operating Range

Parameter	Symbol	Limit Values		Unit	Remarks
		Min.	Max.		
Input voltage	V_I	6	42	V	–
Output current	I_Q	15	–	mA	–
Junction temperature	T_j	-40	150	$^{\circ}\text{C}$	–

Table 4 Electrical Characteristics
 $6.2\text{ V} < V_I < 36\text{ V}$; $-40\text{ °C} < T_j < 150\text{ °C}$; unless otherwise specified

Parameter	Symbol	Limit Values			Unit	Test Condition
		Min.	Typ.	Max.		
Output						
Output voltage	V_Q	4.85	5.0	5.15	V	$T_j = 25\text{ }^{\circ}\text{C}$; $1\text{ mA} < I_Q < 10\text{ mA}$
Output voltage	V_Q	4.8	5.0	5.20	V	$1\text{ mA} < I_Q < 10\text{ mA}$
Drop voltage	V_{dr}	0.6	0.8	1.1	V	$I_Q = 10\text{ mA}^{1)}$
Output capacitor	C_Q	1	–	–	μF	$\text{ESR} \leq 10\text{ }\Omega$ at 10 kHz
Output current	I_Q	15	–	70	mA	–
Current Consumption						
Quiescent current	I_q	–	100	150	μA	$I_Q < 10\text{ mA}$; $V_I = 13.5\text{ V}$
Regulator Performance						
Load regulation	ΔV_Q	–	5	10	mV	$0\text{ mA} < I_Q < 10\text{ mA}$; $V_I = 6\text{ V}$; $T_j \leq 85\text{ }^{\circ}\text{C}$
Line regulation	ΔV_Q	–	5	10	mV	$I_Q = 5\text{ mA}$; $T_j \leq 85\text{ }^{\circ}\text{C}$
Power supply ripple rejection	$PSRR$	–	60	–	dB	$f_r = 100\text{ Hz}$; $V_r = 0.5\text{ V}_{pp}$
Power Fail Output						
Power fail switching threshold	ΔV_Q	–	$V_{Q,nom}$ - 50	–	mV	$V_{PF} < 1\text{ V}$
Power fail low voltage	$V_{PF, low}$	–	0.15	0.3	V	$I_{PF} = 0.1\text{ mA}$; $V_Q = 4.5\text{ V}$
Power fail leakage current	I_{PFLK}	–	–	10	μA	$R_{ext} = 47\text{ k}\Omega$
Power fail pull-up	R_{PF}	30	50	70	$\text{k}\Omega$	internally connected to V_Q

1) Measured when the output voltage V_Q has dropped 100 mV from the nominal value.


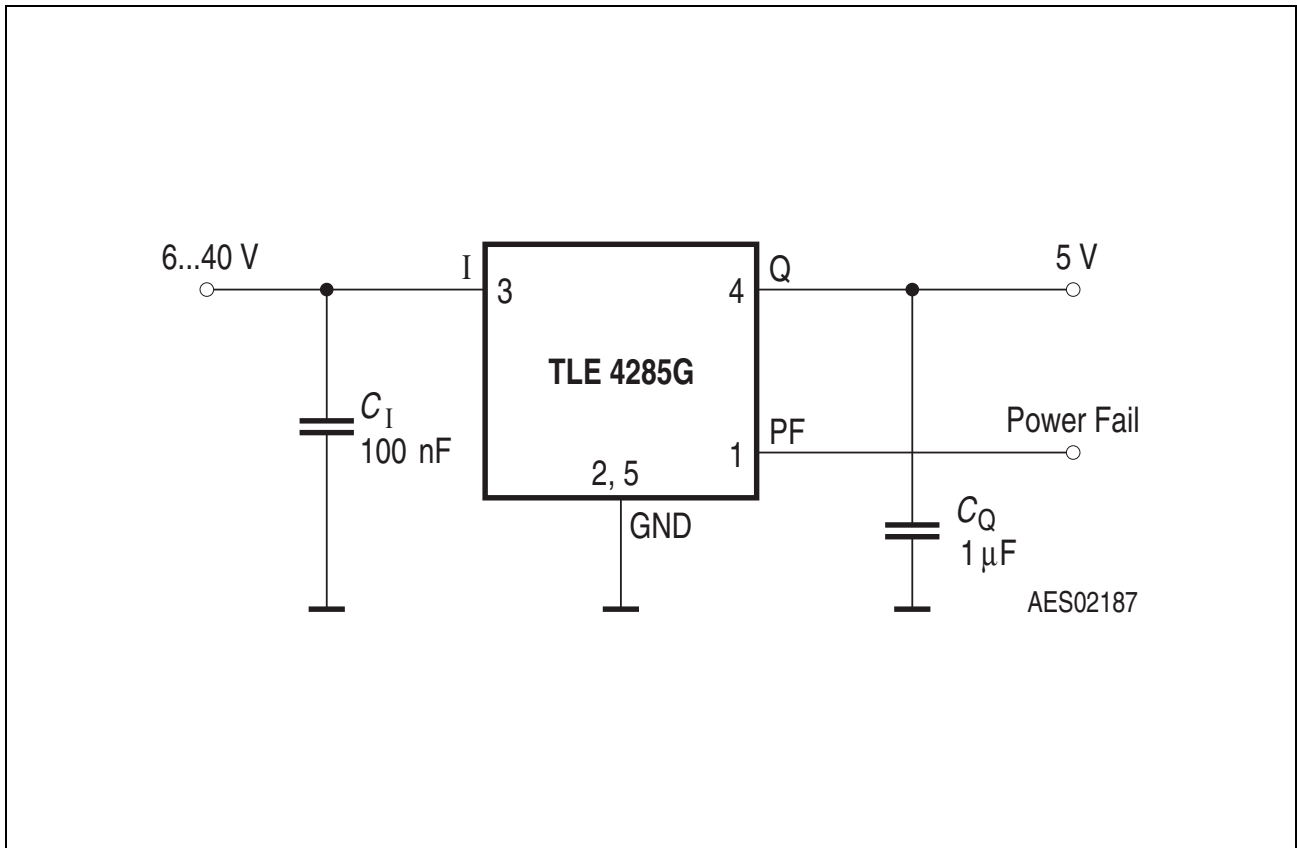



Figure 3 Application Circuit

Typical Performance Characteristics


Output Voltage V_Q versus Temperature T_j

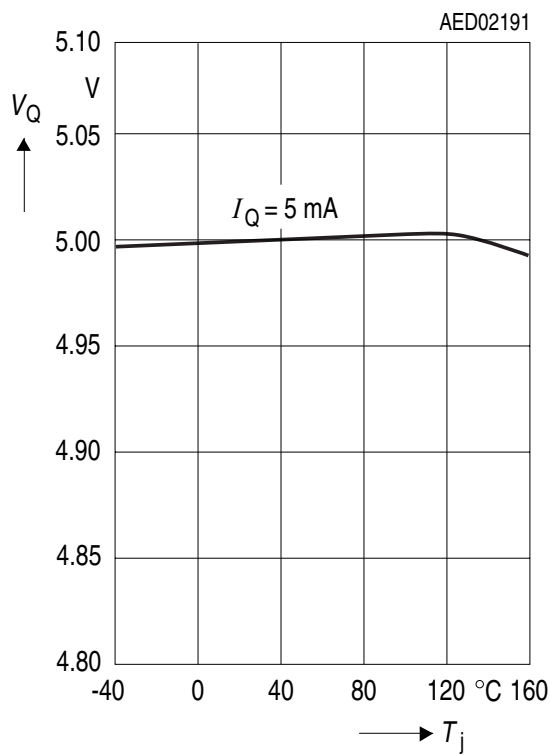


Output Voltage V_Q versus Output Current I_Q

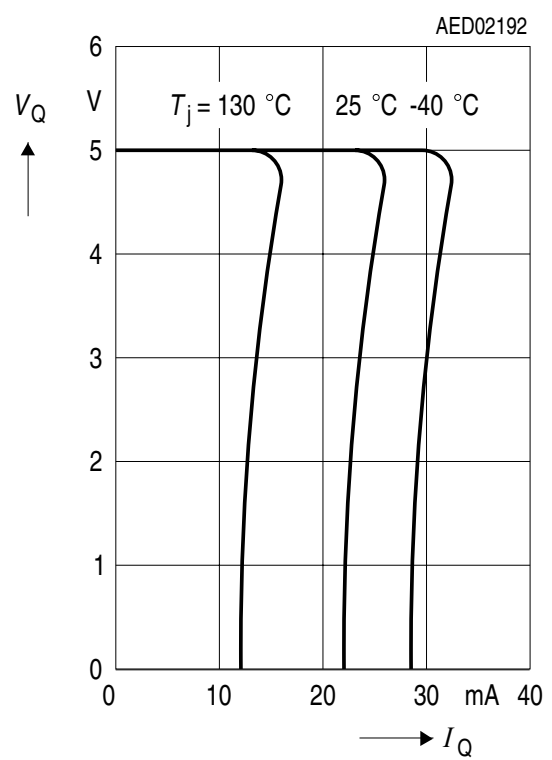


Output Voltage V_Q versus Input Voltage V_I

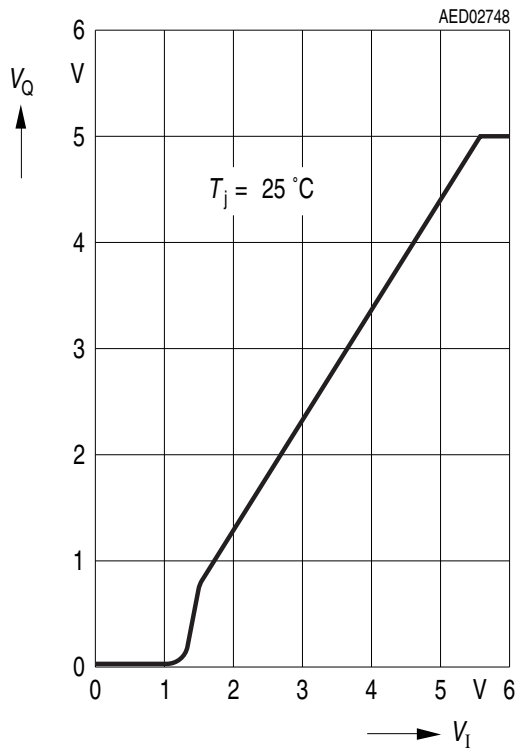


Drop Voltage V_{dr} versus Output Current I_Q

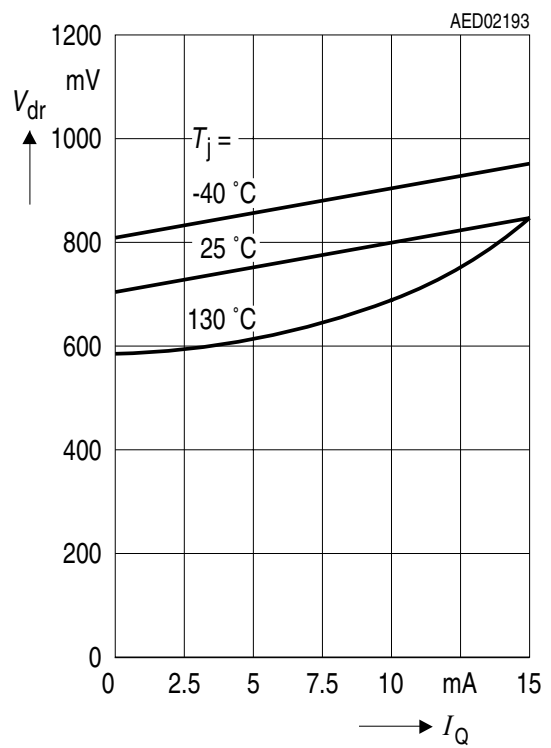


Current Consumption I_q versus Output Current I_Q

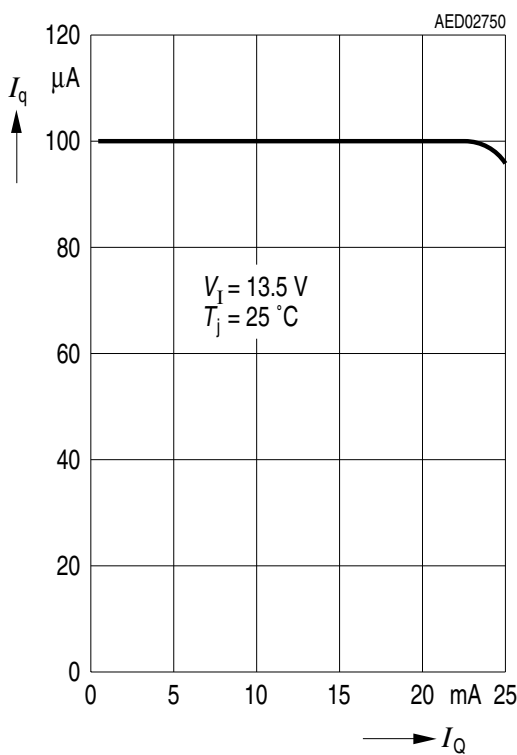

Current Consumption I_q versus Input Voltage V_I

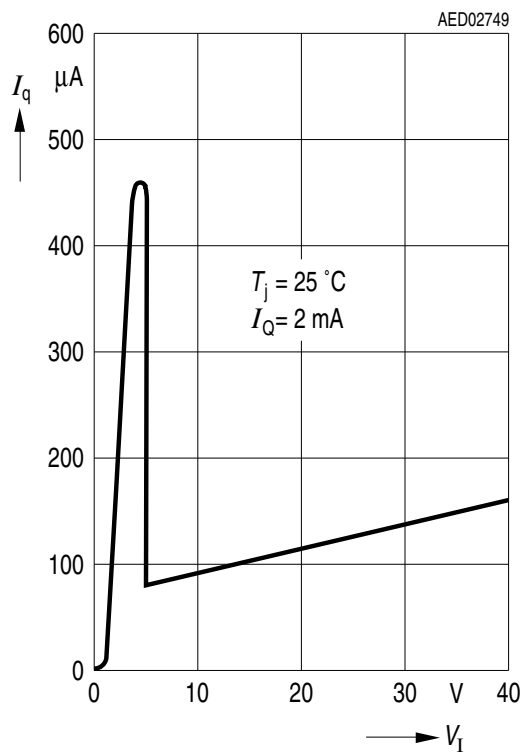

Power Fail Low Voltage V_{PF} versus Power Fail Current I_{PF}

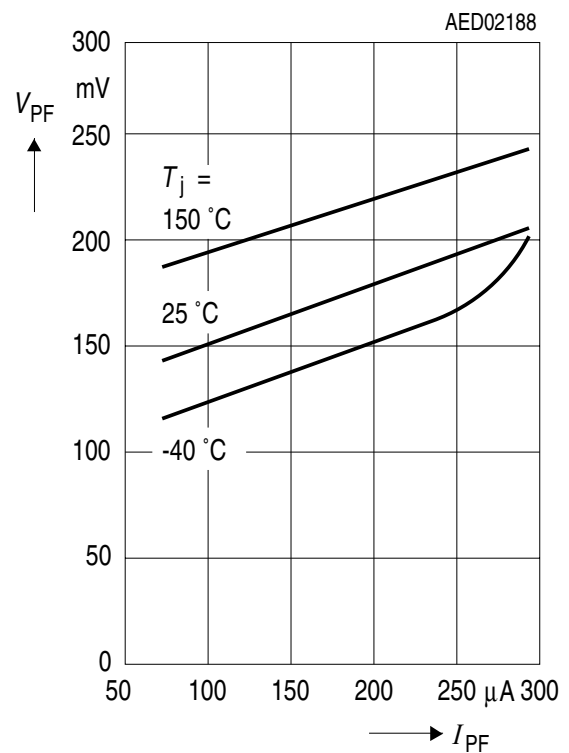

Package Outlines

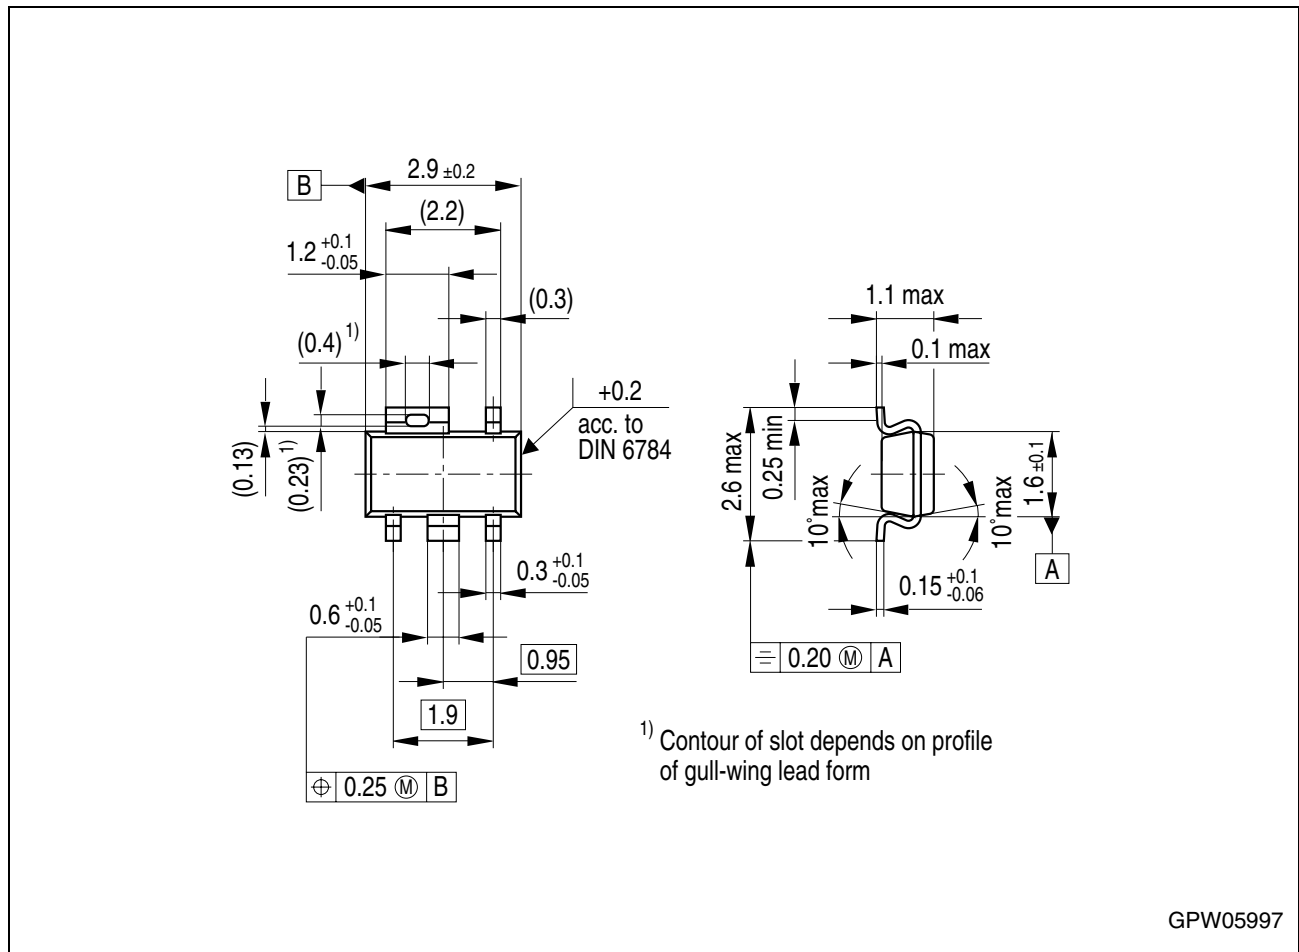


Figure 4 P-SCT-595-5 (Plastic Small Outline)

You can find all of our packages, sorts of packing and others in our Infineon Internet Page "Products": <http://www.infineon.com/products>.

SMD = Surface Mounted Device

Dimensions in mm

Edition 2004-01-01

**Published by Infineon Technologies AG,
St.-Martin-Strasse 53,
81669 München, Germany**

**© Infineon Technologies AG 2004.
All Rights Reserved.**

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.