


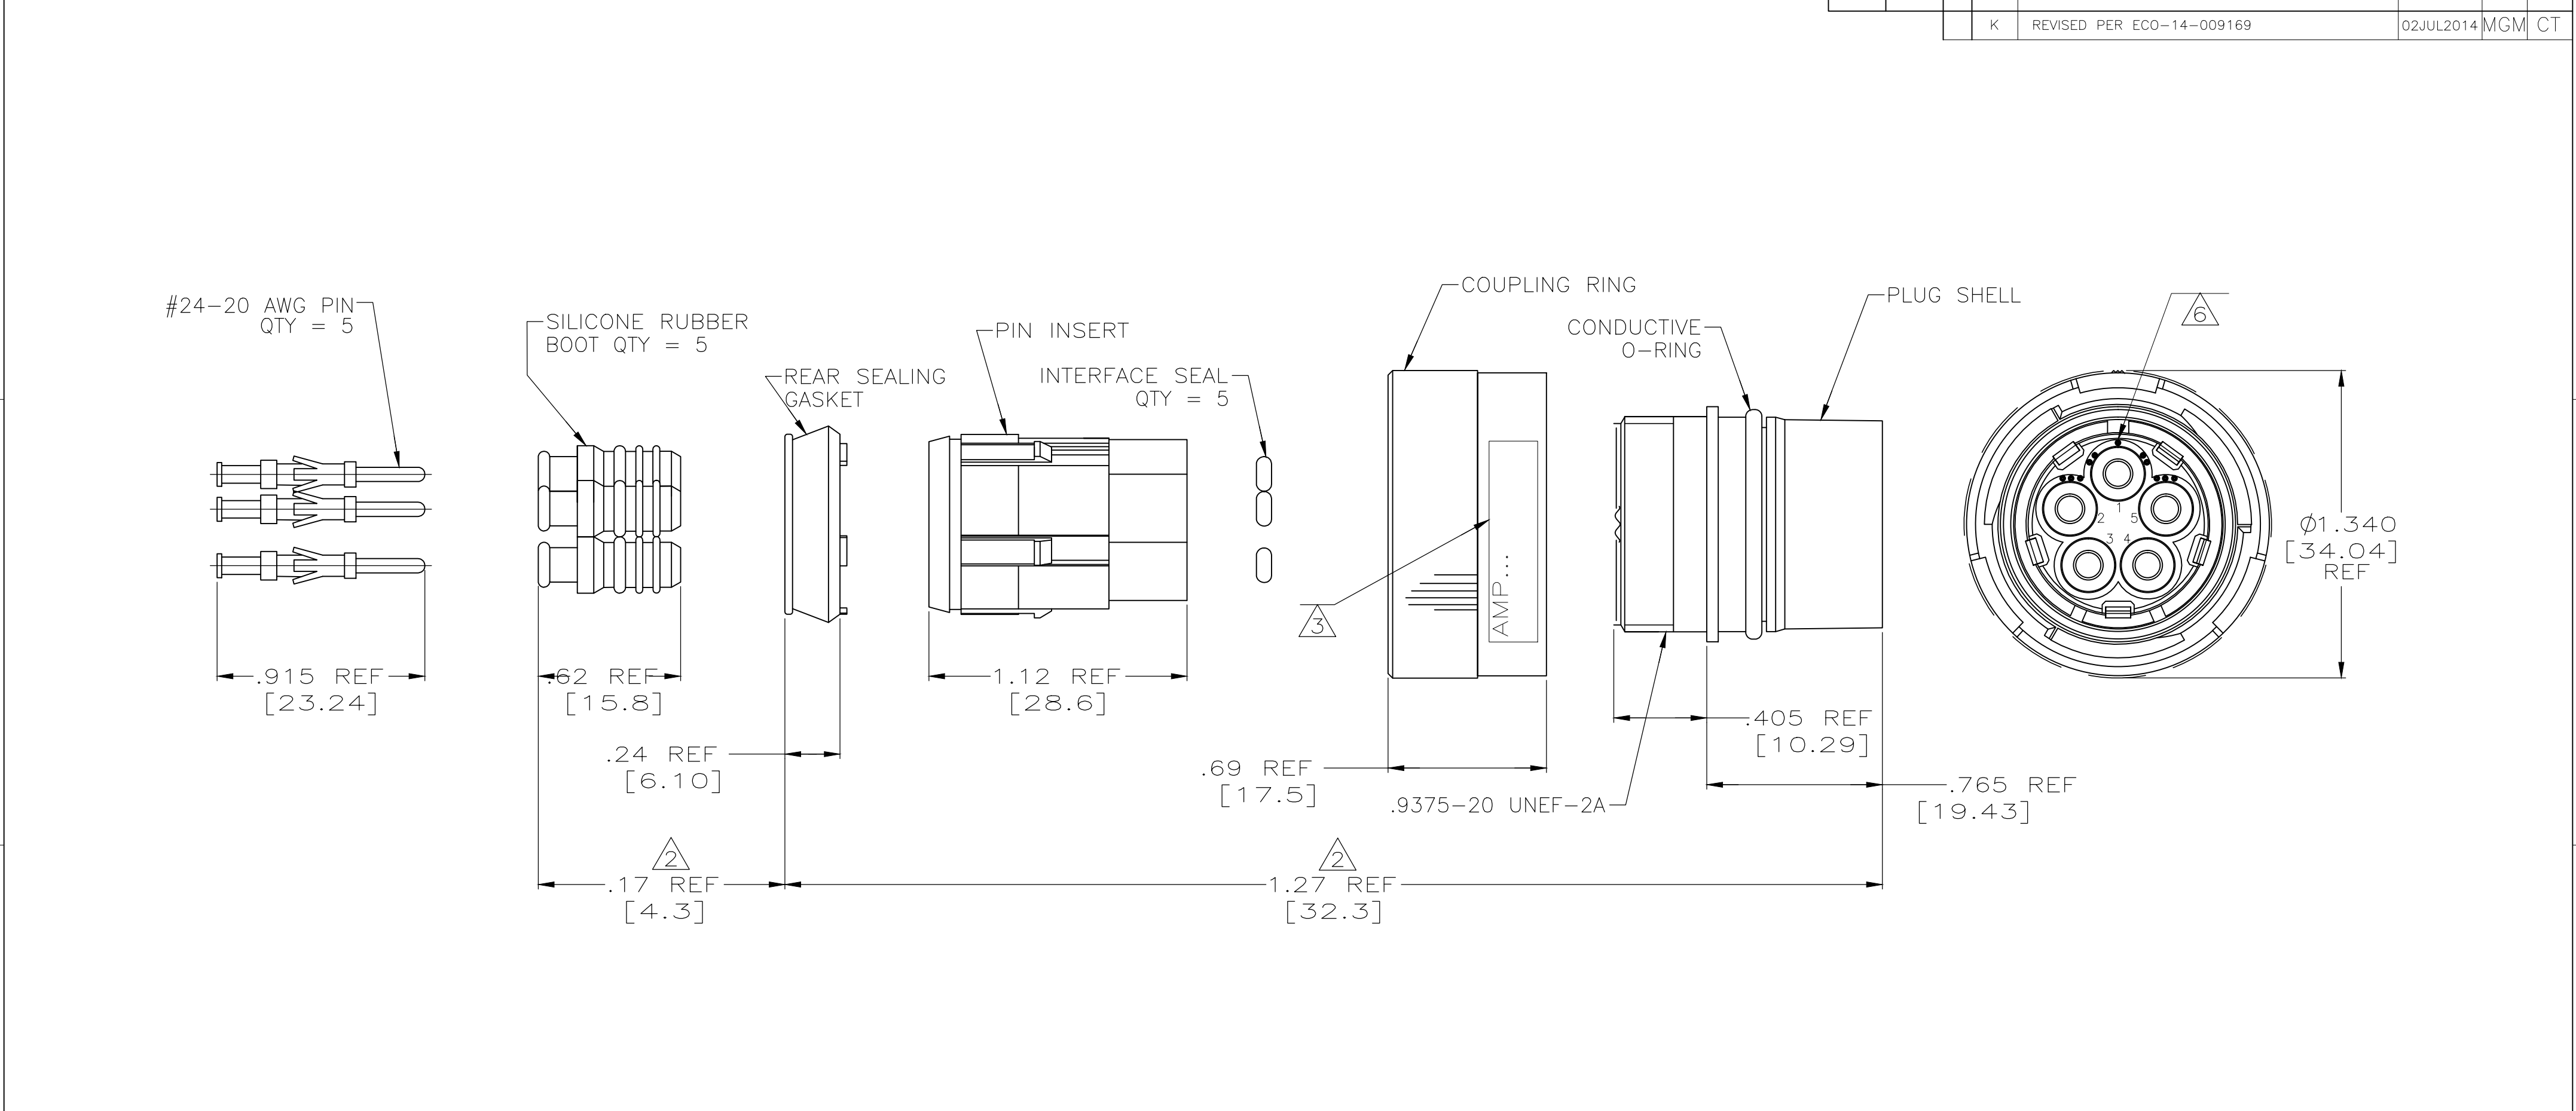

1. THIS PLUG REQUIRES A SIZE 16 MIL-C-38999F BACKSHELL OR EQUIVALENT STRAIN RELIEF.
2. THE INDICATED DIMENSIONS APPLY AFTER ASSEMBLY. COMPLETE OVERALL DIMENSIONS AFTER ASSEMBLY DEPEND UPON THE SPECIFIC BACKSHELL OR STRAIN RELIEF USED.
3. MARKED PER MIL-STD-130, .060 [1.52] HIGH CHARS., WITH WHITE INK. SEE TABLE FOR SPECIAL MARKING.
4. -----
5. THE THREE OUTER COUPLING RING LATCHES ARE BONDED TO INNER HELIX RING WITH AN EPOXY BASE ADHESIVE.
6. SINGLE DOT POLARIZATION SHOWN FOR REFERENCE ONLY.

OBSOLETE	(00779/AMP,864063-4)DATE CODE	49956-848285-6B REV M	864063-4
OBSOLETE	(00779/AMP,864063-3)DATE CODE	49956-848285-6A REV M	864063-3
OBSOLETE	(00779/AMP,864063-2)DATE CODE	49956-848285-6 REV M	864063-2
	(00779/AMP,864063-1)DATE CODE	-	864063-1
AMP INFO		CUSTOMER INFO	PART NO.
MARKING		3	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS CHK C.SHELLY APVD - PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	11-19-96 11-26-96 - - - -
DIMENSIONS: INCHES		TE Connectivity	
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		PLUG KIT,5 POSN.,LGH	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		-	
MATERIAL -		FINISH -	
CUSTOMER DRAWING		SIZE A2	RESTRICTED TO -
		CAGE CODE 00779	DRAWING NO C-864063
		SCALE 2:1	SHEET 1 OF 1
		REV K	