



## Features

- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- For general purpose applications
- The SD101AW to SD101CW series is a Metal-on-silicon Schottky barrier device which is protected by a PN junction Guard ring.
- Low Forward Voltage Drop

## Mechanical Data

- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Polarity: Indicated by Cathode Band
- Marking : SD101AW---S1 ; SD101BW---S2; SD101CW---S3

## Maximum Ratings @ 25°C Unless Otherwise Specified

Characteristic	Symbol	SD101AW	SD101BW	SD101CW
Peak Repetitive Reverse Voltage	$V_{RRM}$			
Working Peak Reverse Voltage	$V_{RWM}$	60V	50V	40V
DC Blocking Voltage	$V_R$			
Maximum single cycle surge 10us square wave	$I_{FSM}$		2.0A	
Power Dissipation(Note 1)	$P_d$		400mW	
Thermal Resistance, Junction to Ambient	$R$		300K/W	
Junction Temperature	$T_j$		125°C	
Storage Temp. Range	$T_{STG}$		-55 to +150°C	


## Electrical Characteristics @ 25°C Unless Otherwise Specified

Characteristic	Symbol	Max	Test Condition
Leakage Current	SD101AW	200nA	$V_R=50V$
	SD101BW	200nA	$V_R=40V$
	SD101CW	200nA	$V_R=30V$
Maximum Forward Voltage Drop	SD101AW	0.41V	
	SD101BW	0.4V	
	SD101CW	.39V	$I_F=1mA$
	SD101AW	1V	$I_F=15mA$
	SD101BW	0.95V	
	SD101CW	0.9V	
Junction Cap.	SD101AW	2.0pF	$V_R=0V, f=1.0MHz$
	SD101BW	2.1pF	
	SD101CW	2.2pF	
Reverse Recovery Time	$t_{rr}$	1ns	$I_F=I_R=5mA$ , recover to 0.1 $I_R$

Notes: 1. Valid provided that electrodes are kept at ambient temperature


# SD101AW THRU SD101CW

## Small Signal Schottky Diodes

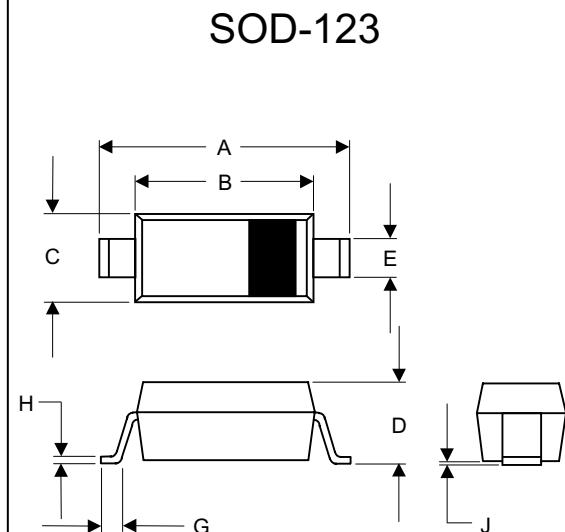

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.140	.152	3.55	3.85	
B	.100	.112	2.55	2.85	
C	.055	.071	1.40	1.80	
D	-----	.053	-----	1.35	
E	.012	.031	0.30	.78	
G	.006	-----	0.15	-----	
H	-----	.01	-----	.25	
J	-----	.006	-----	.15	

### SUGGESTED SOLDER PAD LAYOUT

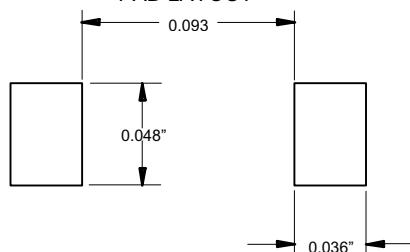

<sup>TM</sup>

Micro Commercial Components

## Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\):](#)

[SD101CW-T](#) [SD101AW-T](#) [SD101BW-T](#) [SD101BW-TP](#) [SD101CW-TP](#) [SD101AW-TP](#)