SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED VOLTAGE	12	Vdc	
OPERATING VOLTAGE RANGE	10 ~ 48	Vdc	
RATED CURRENT (MAX)	3	mA	
MINIMUM SPL @ 10 CM	86	dBA	
RESONANT FREQUENCY	2,800 ± 500	Hz	
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec	
OPERATING TEMPERATURE	-30 ~ +85	°C	
STORAGE TEMPERATURE	- 4 0 ~ +85	°C	
HOUSING MATERIAL	NYLON	-	
TERMINAL MATERIAL	Sn Plated Bronze	-	
WEIGHT	40	grams	

1. ALL DIMENSIONS ARE IN MILLIMETERS.

3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

WITHOUT NOTICE.

2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL

THIS DOCUMENT CONTAINS DATA
PROPRIETARY TO PROJECTS UNLIMITED,
INC. ANY USE OR REPRODUCTION, IN ANY
FORM, WITHOUT PRIOR WRITTEN
PERMISSION OF PROJECTS UNLIMITED, INC.
IS PROHIBITED.
©2003, Projects Unlimited Inc.

		REVISION HISTORY		
,	LTR	DESCRIPTION	DATE	APPROVED
с.	-	RELEASED FROM ENGINEERING	6/21/2006	
	Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	2/28/2008	B.R.

Checked by

Date

6/21/2006

Approved by

B.R.

UL Indicator


AI-4228-P-C48-R

Date

6/21/2006 2/28/2008

Drawn Date

1/1

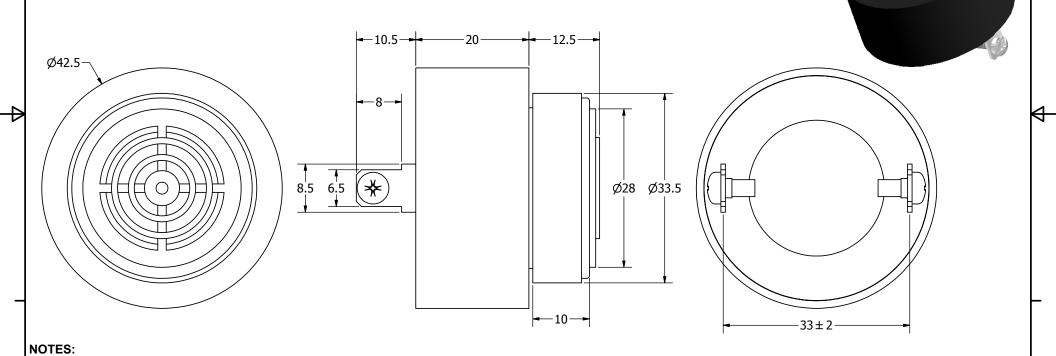

UNLESS OTHERWISE

SPECIFIED:

MENSIONS ARE IN

MILLIMETERS,

TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

AI-4228-P-C48-R.idw

THIS PART IS UL RECOGNIZED IN THE US AND CANADA Designed by

SIZE

Date

6/21/2006

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: