

	OPERATIN	G CHARAC	TERISTIC	S AT 25°	CAMBIENT		
CHARACTERISTICS	COLOR	MIN	TYP	MAX	UNITS	TEST CONDITIONS	
LUMINOUS INTENSITY	GREEN	2.0	8.0			V - 5 V	
	YELLOW	2.2	8.0		mc d	V = 5 V	
FORWARD CURRENT	GREEN		12	15	v	V = 5 V	
	YELLOW		10	15] '		
PEAK WAVELENGTH	GREEN		565				
	YELLOW		583		1 nm		
VIEWING ANGLE	ALL		60		Degree		


ABSOLUTE MAXIMUM RATING AT 25°C AMBIENT	UNITS	GREEN	YELLOW
D.C. FORWARD VOLTAGE	٧	7.5	7.5
REVERSE VOLTAGE	٧	5.0	5.0
LEAD SOLDERING TEMPERATURE, 5 SEC., 1/16" FROM BODY	•с	260	260
OPERATING TEMPERATURE	•c	-20 TO 85	-40 TO 85
STORAGE TEMPERATURE	•c	-55 TO 100	

LED COLOR				
PART No ->	553-0008-833			
POS.I	YELLOW			
POS.2	GREEN			
POS.3	YELLOW			
POS.4	GREEN			
POS.5	YELLOW			
POS.6	GREEN			
POS.7	YELLOW			
POS.8	GREEN			



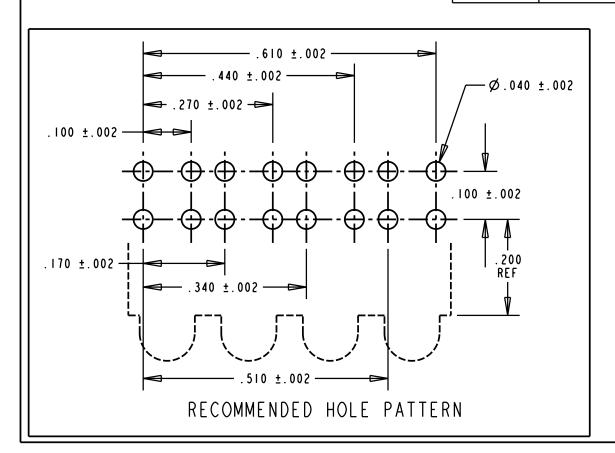


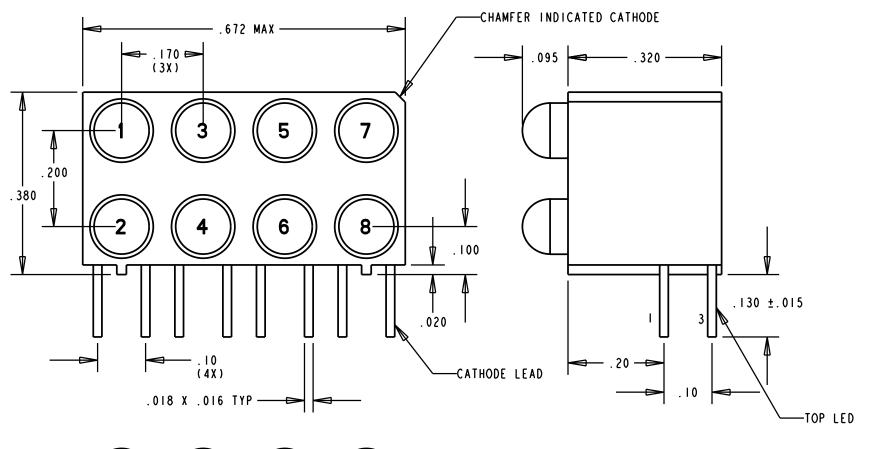



NOTES:

- I- LEADS TO FIT INTO HOLES SPACED AS PER HOLE PATTERN
 2- PIN NUMBERS FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART.
 3- LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT
 4- DIALIGHT PART NUMBER = 553-0008-833

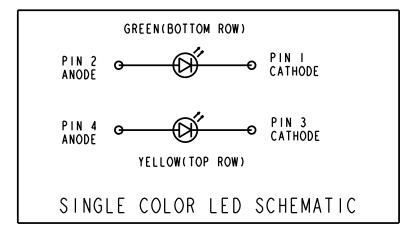

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

1 00010000 11111001 11	IL WATTER CONCERT	or DINETOIL.		
SCALE 5:1	DRAWING NUMBER		REV	
ALL DIM'S IN: INCHES TOLERANCES:	C - I	6610	Δ	
UNLESS OTHERWISE SPECIFIED	<u> </u>	, ,		
FRACTIONS: ±1/64 DECIMALS (.XX): ±.020 DECIMALS (.XXX): ±.015	TITLE 2X4 CBI BLOCK ARRAY			
ANGLES: ±3°	MATERIAL			
FINISH:	Dialight	1913 ATLANTIC AVE. MANASQUAN, N.J. 08736		
FSCM 83330	SHEET OF	FAMILY TABLE:		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

553-0008-833F