Military Fuseholders

Panel Mount

FHN55W
HMR

CATALOG SYMBOL: FHN55W
NON-INDICATING
MEETS MILITARY SPECIFICATION - MIL-F-19207/36
NO AGENCY LISTINGS
FOR MILITARY 1/4" x 1-1/4" FUSES:
F02 AND F03 SERIES
PREVENTS RADIO FREQUENCY INTERFERENCE
PROVIDES BOTH SHIELDING AND GROUNDING
COMMERCIAL EQUIVALENT: HMR

Dimensional Data

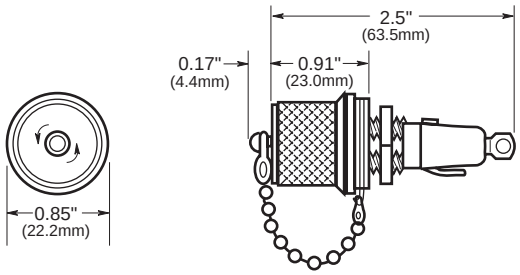

Punched Mounting Hole



Specifications

Knob	Bayonet Type.
Terminals	Solder Lug.
Enclosure	Watertight; RFI Shielding Cap Secured.
Panel Thickness	0.125 Max.
Rating	30 amperes. 250 volts.
Body and knob Molding Material	SDG-F per MIL-M-14; light grey Diallyl Phthalate.
Shield Cap	Brass with lusterless black finish, non-conductive surface.
Fuses	Per MIL-F-15160/02, 03 and MIL-F-23419/09.
Fuseholder qualified and tested to MIL-F-19207. Group A, B, and C.	
Mechanical Shock	MIL-STD-202. Method 213. Method II.
Terminal Strength	5 lbs.
Torque	Mounting - 20 lbs.-inch.
Shield Continuity	With fuseholder mounted normally and shield cap in place, electrical resistance from shield cap to mounting panel not to exceed 0.5 ohms.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.