



UNCONTROLLED DOCUMENT

PART NUMBER
LLP-LXP250321S

REV.


REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE

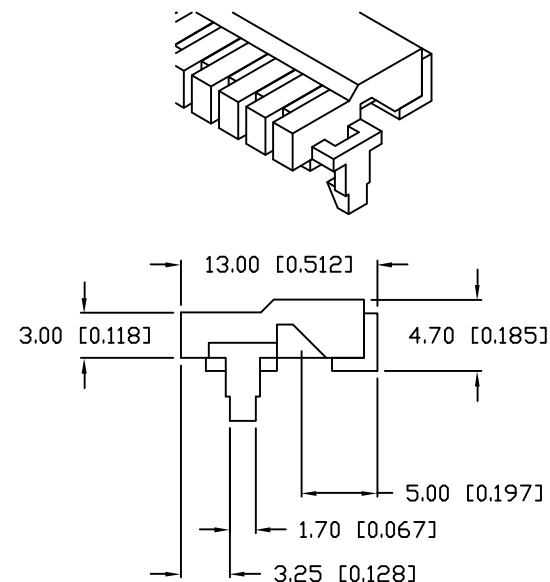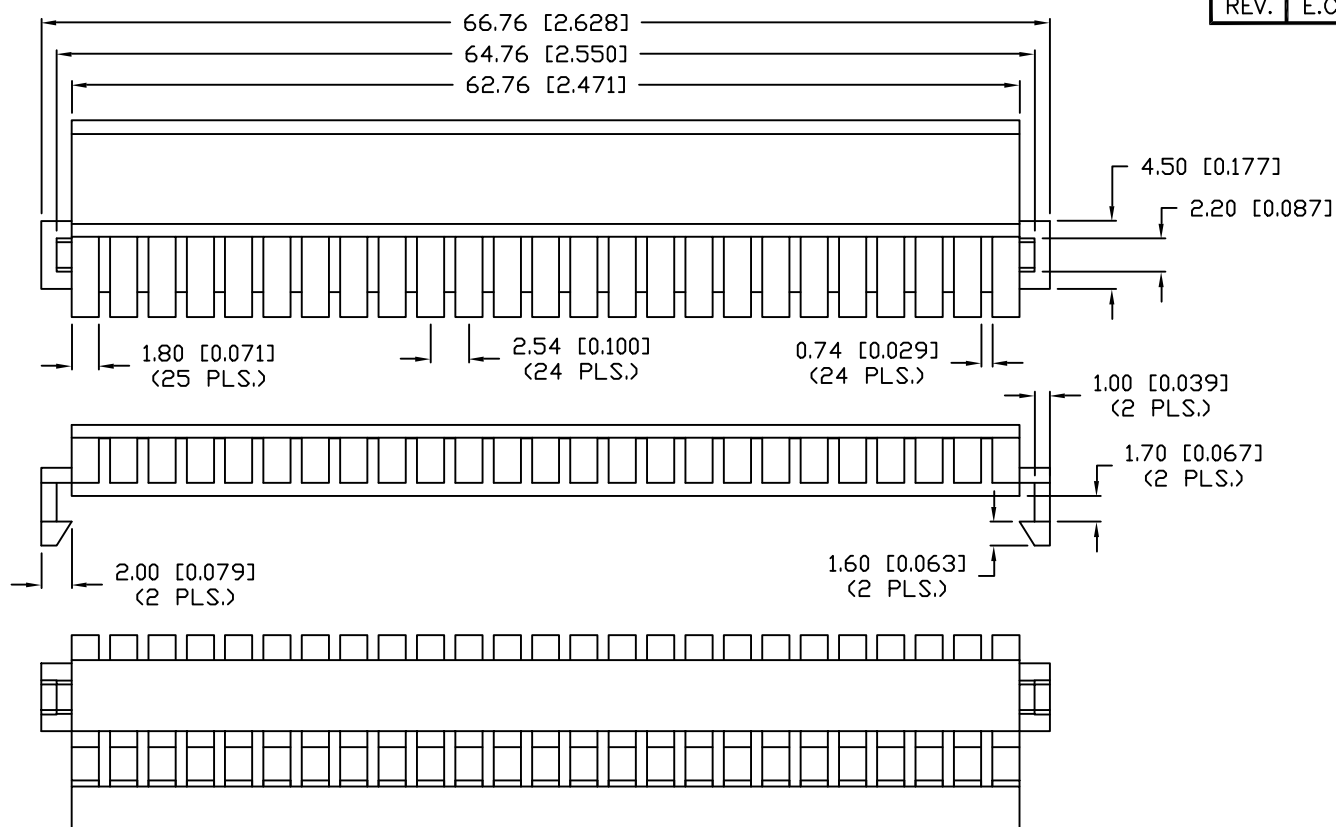

NOTES:

1. MATERIAL: CLEAR POLYCARBONATE UL94V-0. (LIGHT PIPES)
2. MATERIAL: BLACK NORYL, UL94V-0. (ANTIBLEED HOLDER)
3. TEMP RANGE: -60°C TO +125°C.
4. RECOMMENDED LED: SML-LX0603xx SERIES.

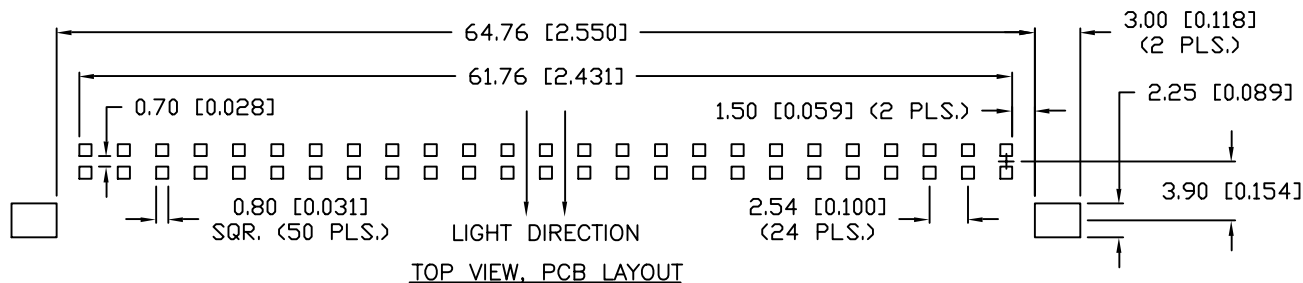

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm 0.25\text{mm}$ ($\pm 0.010''$)

REV.

PART NUMBER
LLP-LXP250321S

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
INCORPORATED

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

3mm x 2mm RECTANGULAR, 25 UNIT,
SMT LIGHT PIPE WITH ANTIBLEED HOLDER.

DRAWN BY:

DU

CHECKED BY:

APPROVED BY:

DATE: 2-1-99

PAGE: 1 OF 1

SCALE: N/A