
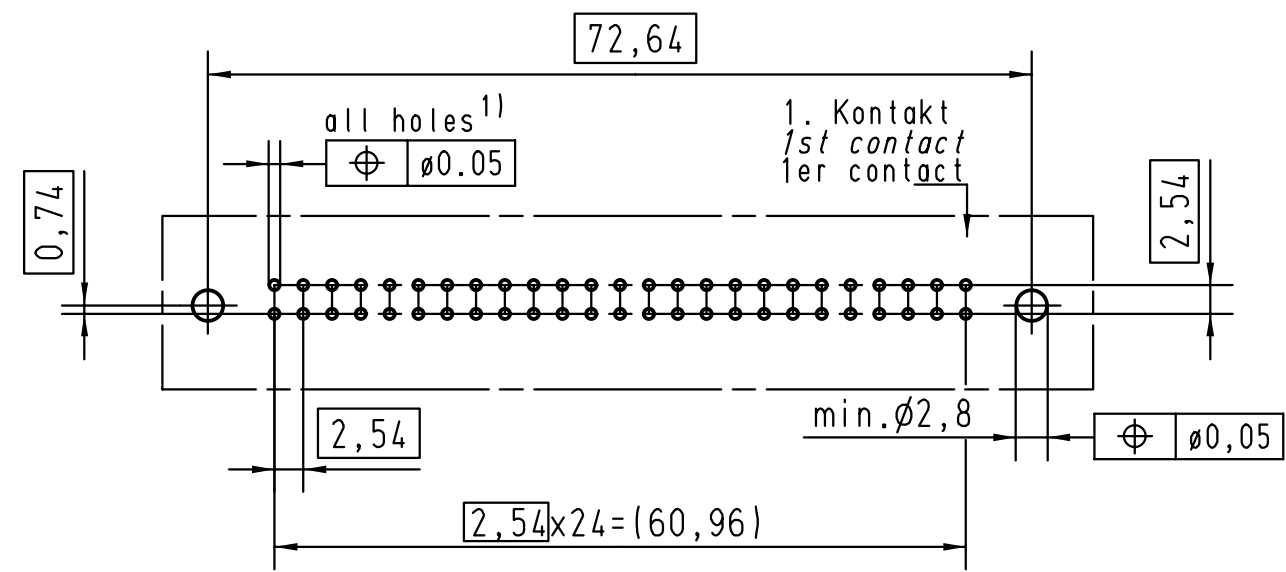
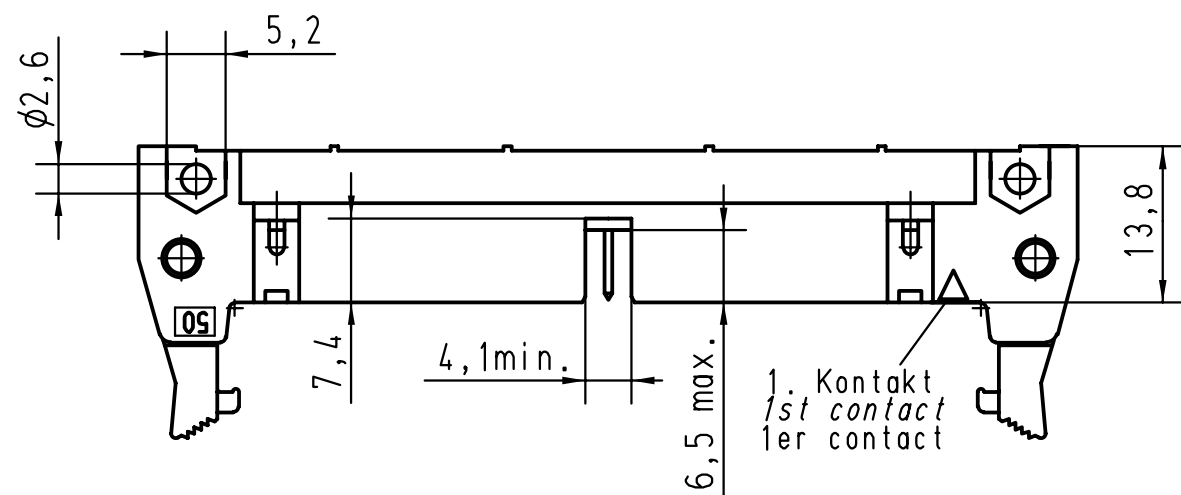
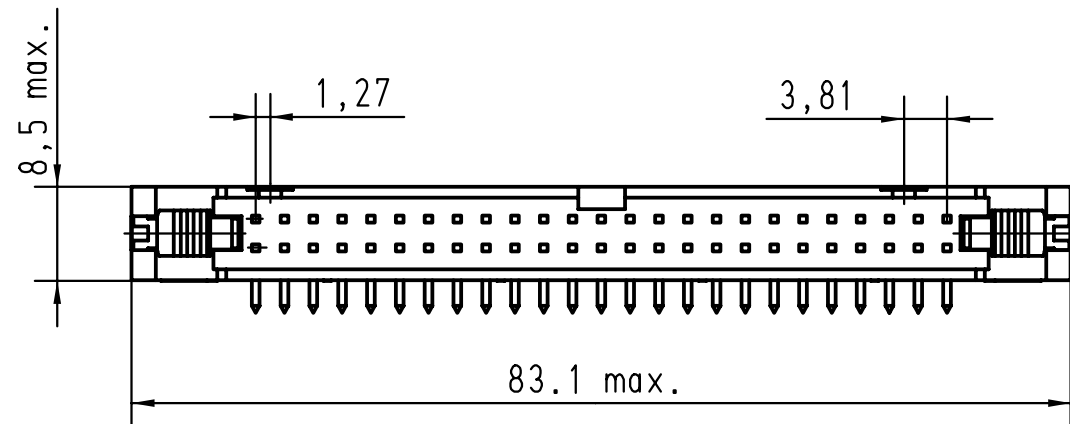
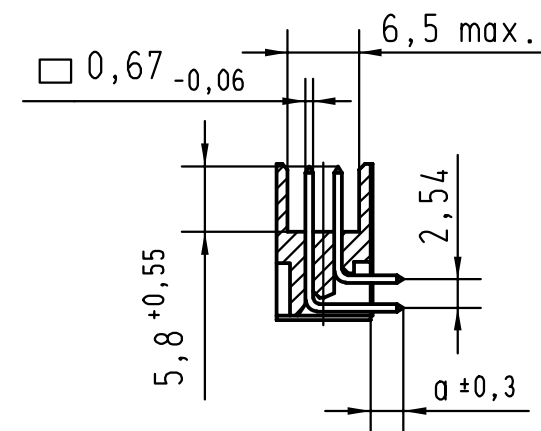
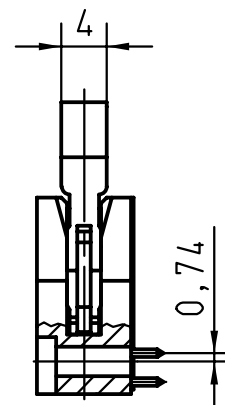


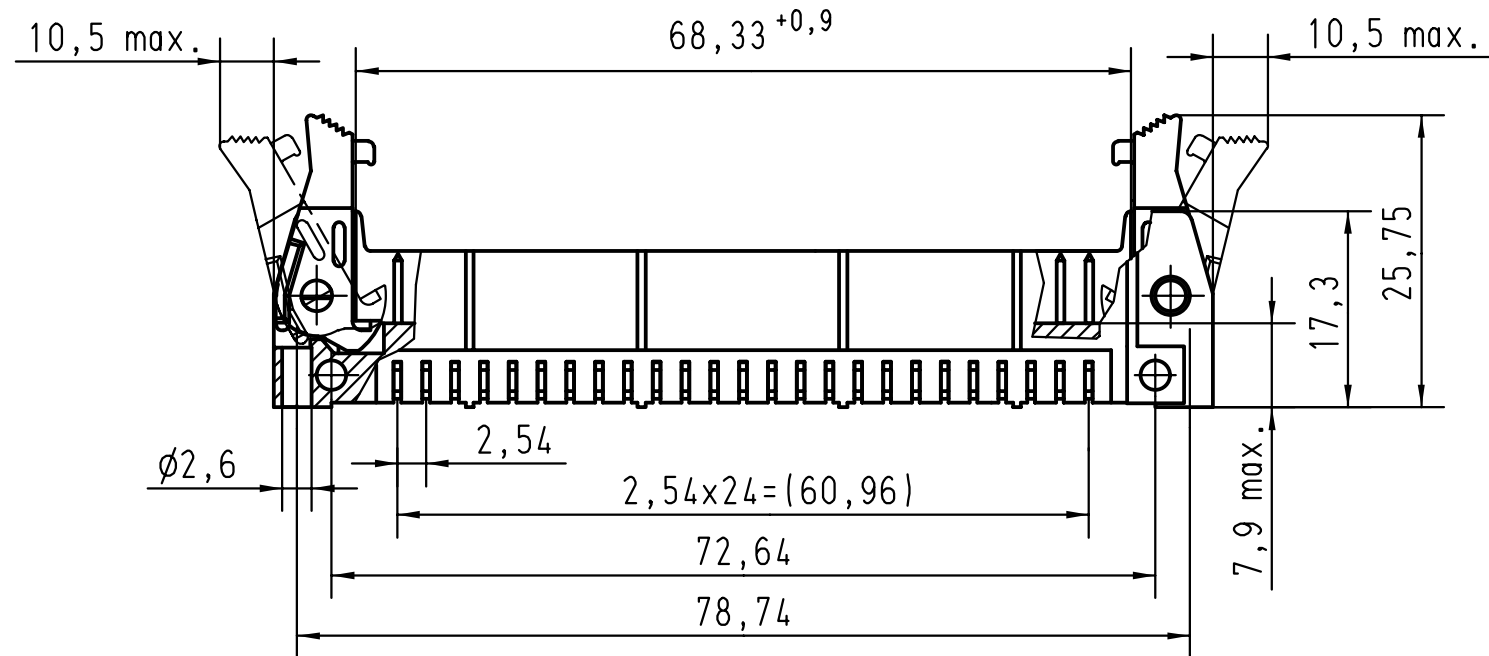

Printed Board Layout
Component side

1) Einlötlstifte passend für Lochungen
 $\phi 1 \pm 0,1$ nach IEC 60326-3
 Solder pins for PCB connections
 $\phi 1 \pm 0,1$ as per IEC 60326-3
 A souder pour des trous de $\phi 1 \pm 0,1$
 selon IEC 60326-3

09185507901	3	4,5		 All Dimensions in mm Original Size DIN A 3	Techn. Character.				Nicht tolerierte Maße/ Free size tolerances		
09185506901	2	4,5									
09185505901	0,76 µm Au	4,5								SEK 18 Male Connector Standard 50 poles Angled pins Long locking levers	
09185507903	3	2,9									
09185506903	2	2,9			29753	11-MAR-02	JB				
09185505903	0,76 µm Au	2,9			29739	03-DEC-01	JB				
Bestell-Nr. Part-No. Reference	Anforderungsstufe performance level Niveau de qualite	a		27931	15-JUNE-00	JB	HARTING EURL F-95972 Paris		TB 0918550x90x	Blatt/ page 2 / 2	
				26554	01-DEC-99	JB					
				Mod.	Dat.	Name			Sub.		
							Detail.		01-DEC-99	Th	1,5:1
							Insp.	03-DEC-01	JMV		
							Stand.				