

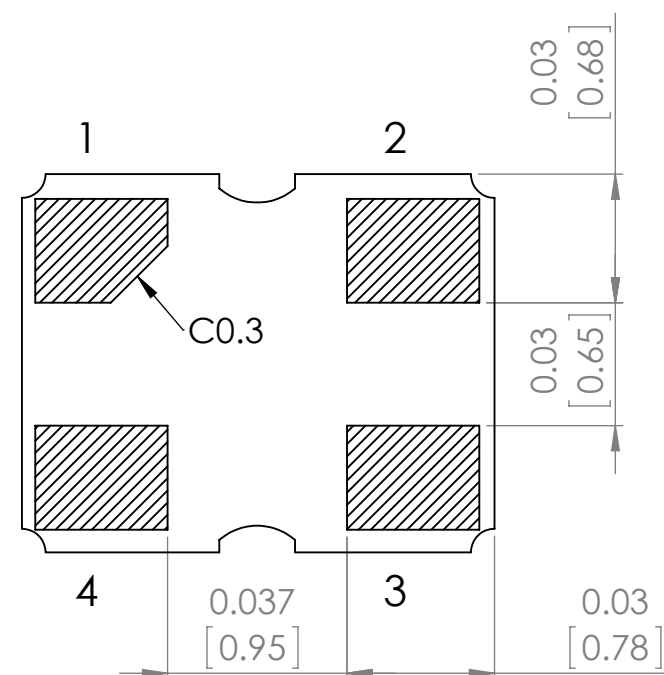
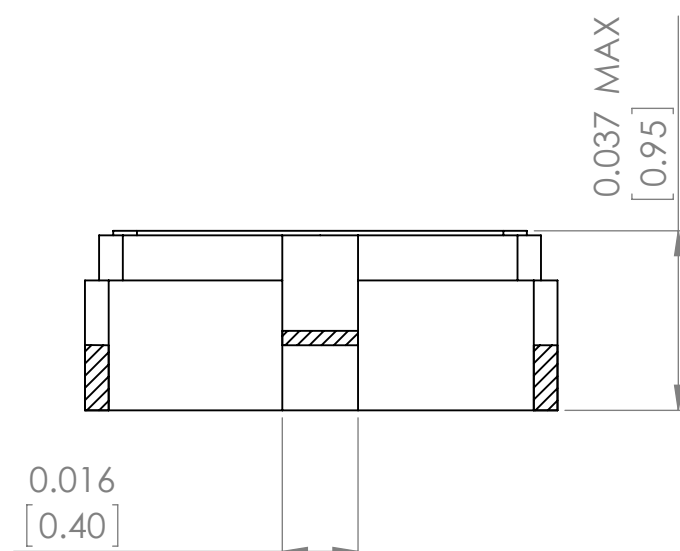


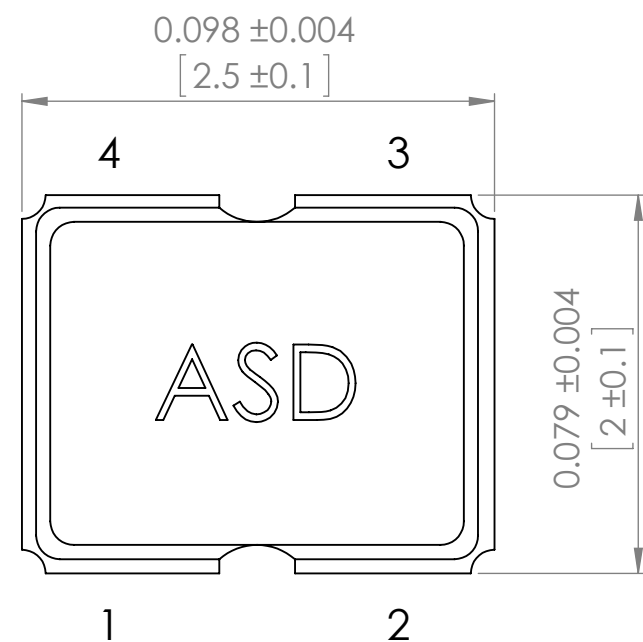



Bottom view

Recommended land pattern

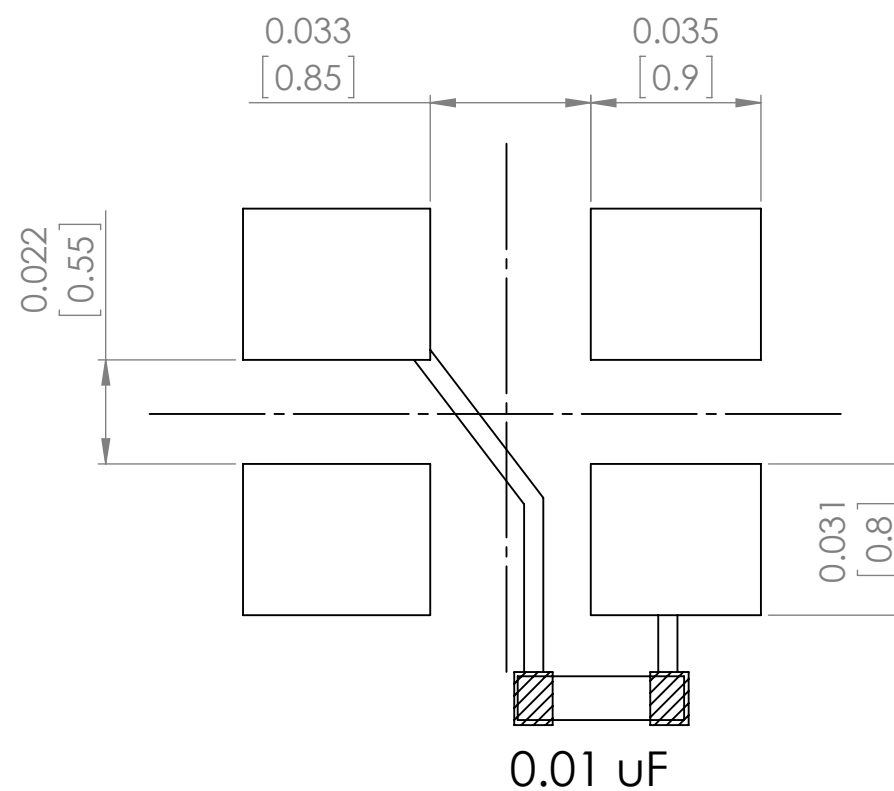

PIN	FUNCTION
1	Tri-state (Stand-by)
2	GND/case
3	Output
4	V _{dd}

Note1: Recommended using approximately 0.01uF bypass capacitor between PIN 2 and 4.

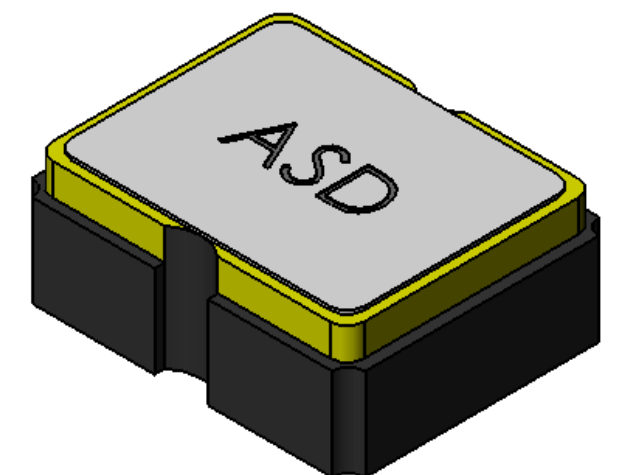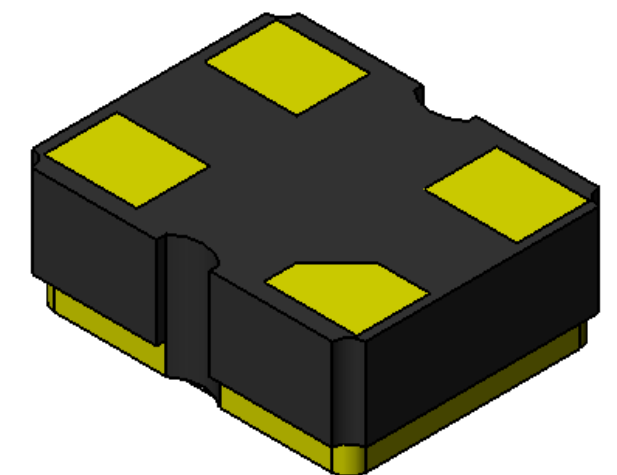

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION -	
DRAWN SAAZVAT				SIGNATURE		DATE		 30332 Esperanza, Rancho Santa margarita, California 92688			
CHK'D XXXXXX								TITLE: LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR			
APPV'D								DWG NO. ASD A3			
MFG								SCALE:25:1 SHEET 1 OF 1			
Q.A						MATERIAL:					
						WEIGHT:					